



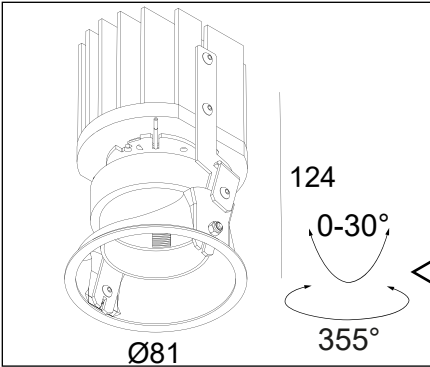


**iMAX II ADJUSTABLE TRIMLESS MP**

DEEL  
PARTIE  
TEIL  
PART  
PARTE  
PARTE

A

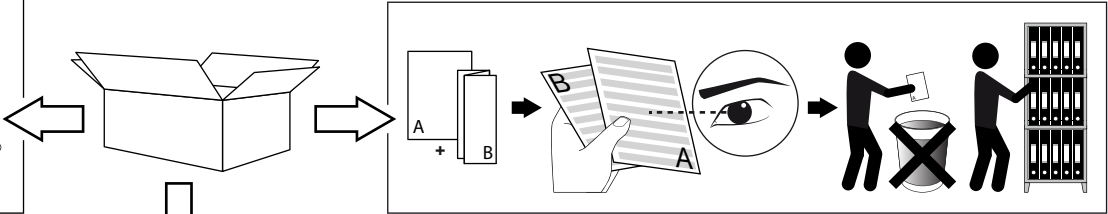



D

IP20





E


REQUIREMENTS

24213 0020  
+  
15212 2010

iMAX II TUBE ROUND TRIMLESS  
MOUNTING KIT R102 TRIMLESS O.F.A.


OR


24213 0030  
+  
400 92 00 OFA  
OR  
400 92 00

iMAX II TUBE SQUARE TRIMLESS  
MOUNTING KIT S102 TRIMLESS O.F.A.  
MOUNTING KIT S102 TRIMLESS

ACCESSORIES

24213 0050  
24213 0060  
24213 0070  
24213 0090  
24213 0100

iMAX II HONEYCOMB  
iMAX II GLASS SBL  
iMAX II LINEAR SPREAD/ ELLIPTICAL LENS  
iMAX II SOFTENING LENS  
iMAX II SPREAD LENS

| REFLECTOR      |                |                        |
|----------------|----------------|------------------------|
| I <sub>0</sub> | P <sub>0</sub> | U <sub>f</sub> Typical |
| EXCL 350mA     | 12,1W          | 34,6V-DC               |
| EXCL 500mA     | 17,9W          | 35,8V-DC               |


IP20


Beschermd tegen vaste voorwerpen die groter zijn dan 12 mm  
 Protégé contre les objets solides de plus de 12 mm  
 Geschützt gegen Festkörper größer als 12 mm  
 Protected against solid objects greater than 12 mm  
 Protegido contra objetos sólidos superiores a 12 mm  
 Protetto contro oggetti solidi più grandi di 12 mm




Enkel geschikt voor toestellen op zeer lage veiligheidsspanning (minder dan 50 V-AC / 120 V-DC)  
 Convient uniquement pour les produits à très basse tension de sécurité (moins de 50 V-AC / 120 V-DC)  
 Geeignet für Güter mit sehr niedriger Sicherheitsspannung (unter 50 V-AC / 120 V-DC)  
 Only suited for goods at Safety Extra Low Voltage (below 50 V-AC / 120 V-DC)  
 se recomienda únicamente para aquellos productos de tensión de seguridad muy baja.  
 (menos de 50 V-AC / 120 V-DC)  
 Vale solo per prodotti a Bassissima tensione di sicurezza (inferiore a 50 V-AC / 120 V-DC)


0,2 m

Minimum afstand van de verlichte voorwerpen (meter)  
 Distance minimale par rapport aux objets éclairés (mètres)  
 Mindestabstand von beleuchteten Gegenständen (Meter)  
 Minimum distance from lighted objects (metres)  
 Distancia mínima de los objetos iluminados (metros)  
 Distanza min. dagli oggetti illuminati (metri)



Toestel niet geschikt om te worden afgedekt met thermische isolatie.  
 Luminaires non appropriées pour recouvrement d'un matériau isolant thermique.  
 Das Gerät/Die Leuchte darf nicht abgedeckt werden mit thermischer Isolation.  
 Luminaire not suitable for covering with insulating material.  
 Luminaria no apta para cubrir con material aislante.  
 Apparecchio non adatto per essere coperto da materiale isolante.

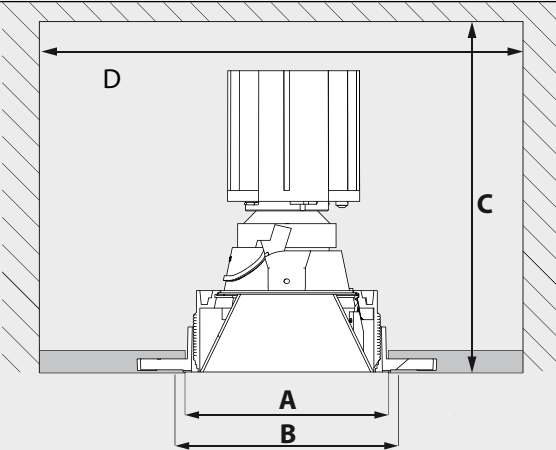

|    | A | øKIT O.F.A |
|----|---|------------|
| ←→ | B | 195        |
| ↑↓ | C | 190        |
| ←→ | D | 350 x 350  |


**Restrictions see page 2**

| Current            | 350mA       |          |          |
|--------------------|-------------|----------|----------|
| Dimension          | 350x350x155 |          |          |
| Accessories        | Lens 18°    | Lens 26° | Lens 39° |
| Without            | ✓           | ✓        | ✓        |
| Linear spread lens | ✓           | ✓        | ✓        |
| Glass SBL          | ✓           | ✓        | ✓        |
| Spread lens        | ✓           | ✓        | ✓        |
| Softening lens     | ✓           | ✓        | ✓        |
| Honeycomb          | ✓           | ✓        | ✓        |
| Glass + Honeycomb  | ✓           | ✓        | ✓        |

| Current            | 350mA       |          |          |
|--------------------|-------------|----------|----------|
| Dimension          | 200x200x155 |          |          |
| Accessories        | Lens 18°    | Lens 26° | Lens 39° |
| Without            | ✓           | ✓        | ✓        |
| Linear spread lens | ✓           | ✓        | ✓        |
| Glass SBL          | ✓           | ✓        | ✓        |
| Spread lens        | ✓           | ✓        | ✓        |
| Softening lens     | ✓           | ✓        | ✓        |
| Honeycomb          | ✓           | ✓        | ✓        |
| Glass + Honeycomb  | ✓           | ✓        | ✓        |

| Current            | 500mA       |          |          |
|--------------------|-------------|----------|----------|
| Dimension          | 350x350x155 |          |          |
| Accessories        | Lens 18°    | Lens 26° | Lens 39° |
| Without            | ✓           | ✓        | ✓        |
| Linear spread lens | ✓           | ✓        |          |
| Glass SBL          | ✓           | ✓        | ✓        |
| Spread lens        | ✓           | ✓        |          |
| Softening lens     | ✓           | ✓        | ✓        |
| Honeycomb          | ✓           | ✓        | ✓        |
| Glass + Honeycomb  |             |          |          |

| Current            | 500mA       |          |          |
|--------------------|-------------|----------|----------|
| Dimension          | 200x200x155 |          |          |
| Accessories        | Lens 18°    | Lens 26° | Lens 39° |
| Without            | ✓           | ✓        | ✓        |
| Linear spread lens |             |          |          |
| Glass SBL          |             |          |          |
| Spread lens        |             |          |          |
| Softening lens     |             |          |          |
| Honeycomb          |             |          |          |
| Glass + Honeycomb  |             |          |          |

E


This product contains a light source of energy efficiency class E at 2700K, CRI90  
本产品包含能效等级为 E 2700K · CRI90的光源”  
Этот артикул содержит источник света с энергоэффективностью класса E, 2700K, CRI90  
يحتوي هذا المنتج على مصدر ضوء ذو كفاءة الطاقة E في ٢٧٠٠ كلفين ، CRI ٩٠  
Dit product bevat een verlichtingsbron van energie-efficiëntieklasse E, bij 2700K, CRI90  
Ce produit contient une source d'éclairage de classe d'efficacité énergétique pour 2700K, CRI90  
Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse E bei 2700K, CRI90  
Este producto contiene una fuente de iluminación de clase de eficiencia energética E en 2700K, CRI90  
Questo prodotto contiene una fonte di illuminazione in classe di efficienza energetica E a 2700K, CRI90

D


This product contains a light source of energy efficiency class D at 3000K, CRI90  
本产品包含能效等级为 D 3000K · CRI90的光源”  
Этот артикул содержит источник света с энергоэффективностью класса D, 3000K, CRI90  
يحتوي هذا المنتج على مصدر ضوء ذو كفاءة الطاقة D في ٣٠٠٠ كلفين ، CRI ٩٠  
Dit product bevat een verlichtingsbron van energie-efficiëntieklasse D, bij 3000K, CRI90  
Ce produit contient une source d'éclairage de classe d'efficacité énergétique D pour 3000K, CRI90  
Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse D bei 3000K, CRI90  
Este producto contiene una fuente de iluminación de clase de eficiencia energética D en 3000K, CRI90  
Questo prodotto contiene una fonte di illuminazione in classe di efficienza energetica D a 3000K, CRI90

1


15212 2010 MOUNTING KIT R102 TRIMLESS O.F.A. ●  
OR  
400 92 00 OFA MOUNTING KIT S102 TRIMLESS O.F.A. ◆  
OR  
400 92 00 MOUNTING KIT S102 TRIMLESS

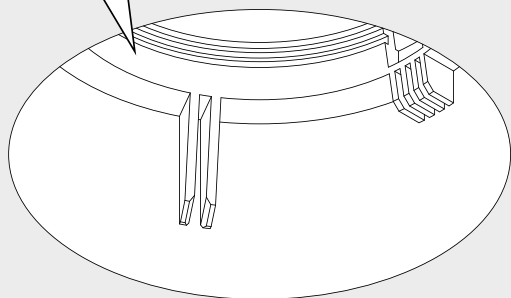



2A

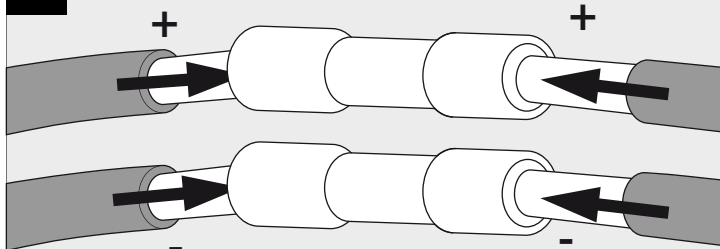


2B

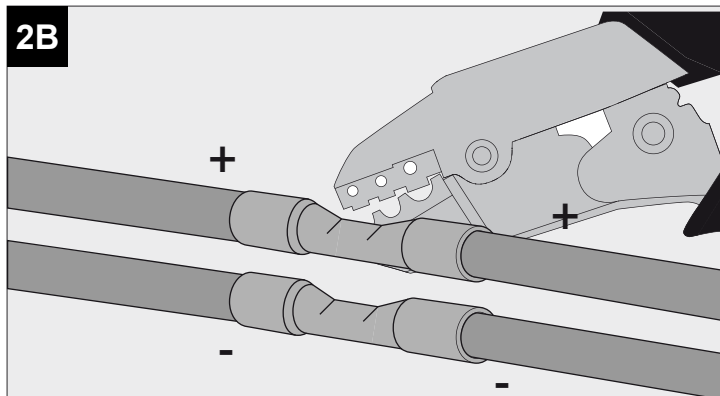

### ELECTRICAL CONNECTION

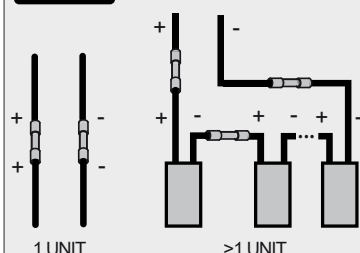

3 0°-30°


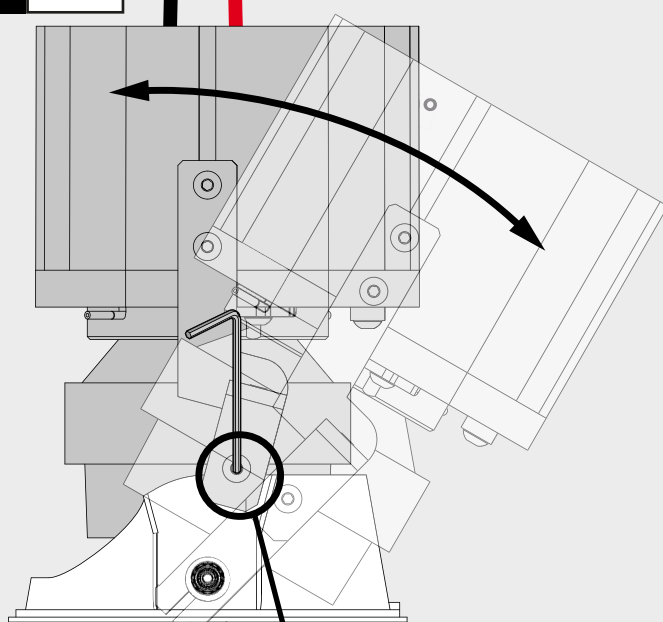


OPTIONAL


FIX 0-30°




3 0°

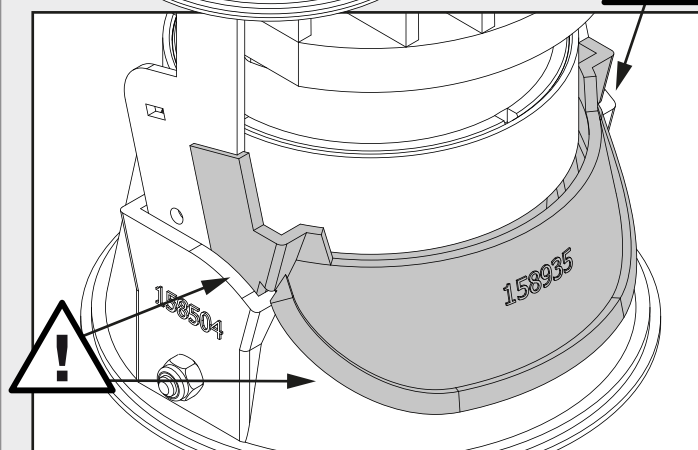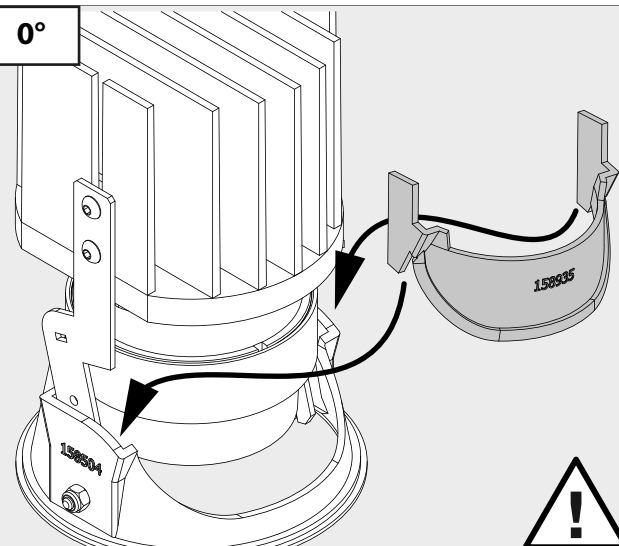


4

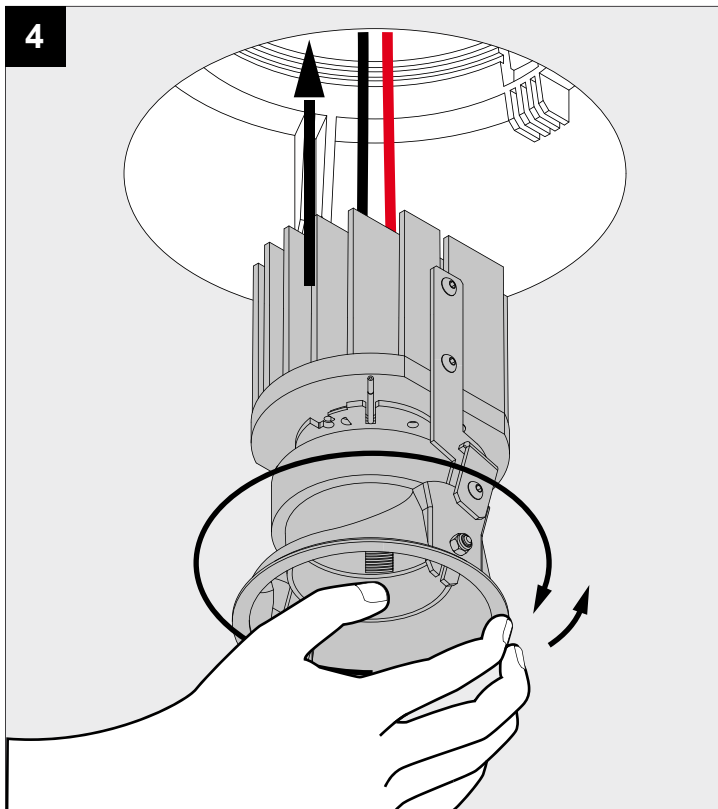

5

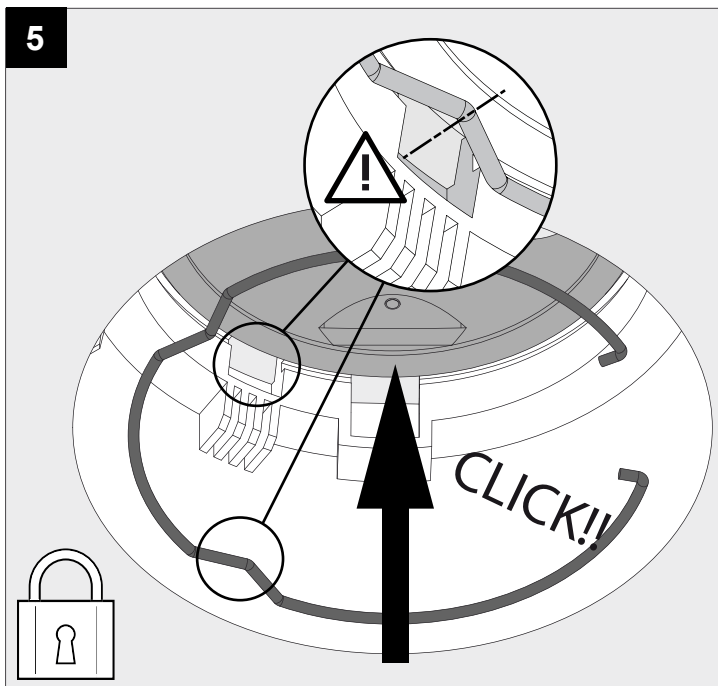


6

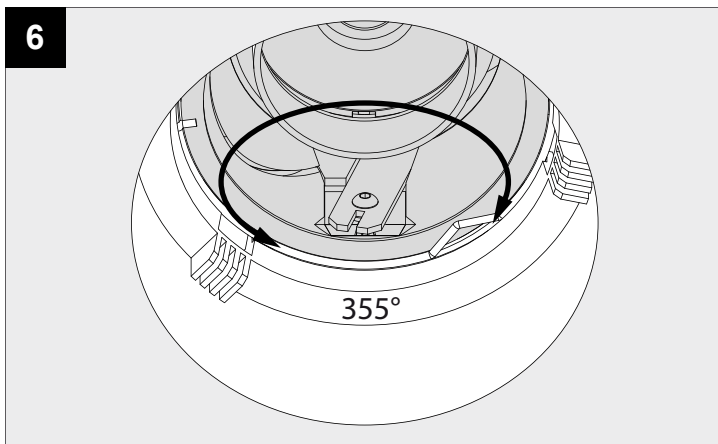


7

INSTALLING COVER

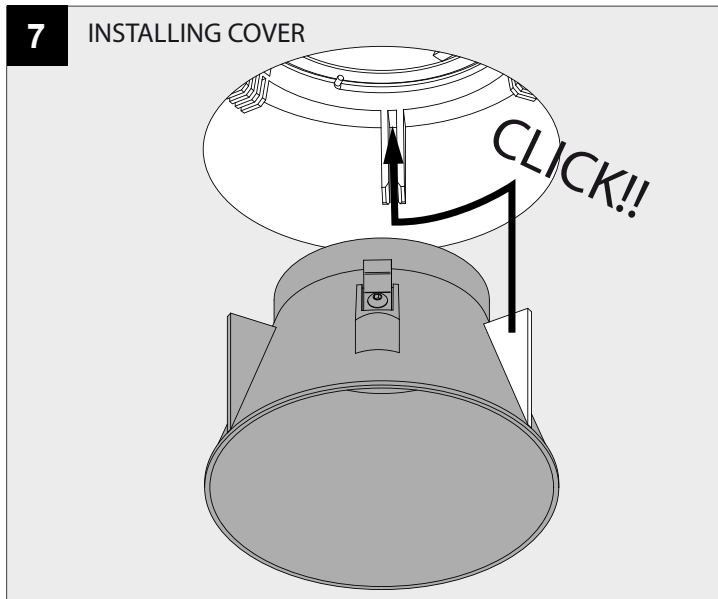

8

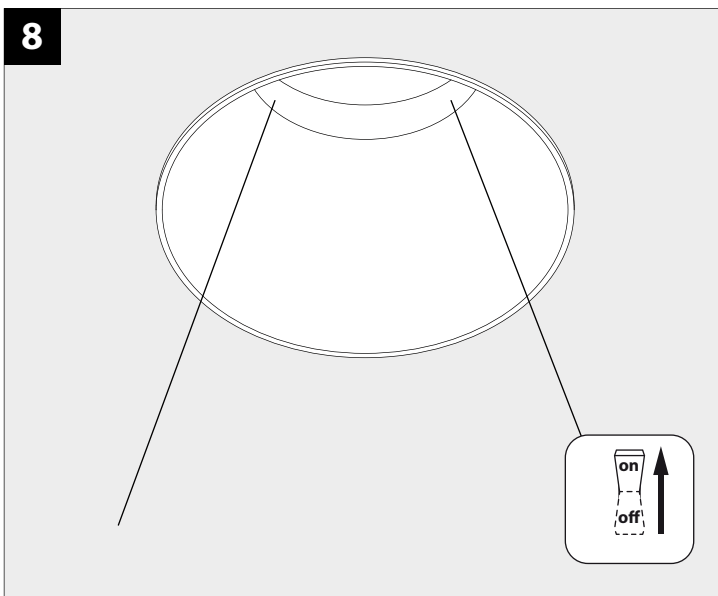

De verlichtingsbron van dit verlichtingstoestel zal enkel door de fabrikant of door de fabrikant aangestelde installateur vervangen worden.

La source lumière de cet appareil ne sera remplacée que par l'entreprise ou par un agent reconnu.

Das enthaltene Leuchtmittel sollte nur durch entsprechendes Fachpersonal ersetzt werden.

The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent.



La fuente de iluminación que tiene esta luminaria sólo puede remplazarse por el fabricante o por un instalador autorizado.

La sorgente luminosa incorporata in questo apparecchio può essere sostituita solo dal produttore, da un suo centro assistenza oppure da una persona in possesso della necessaria abilitazione.



1

ACCESSORIES

24213 0020  
iMAX II TUBE ROUND TRIMLESS

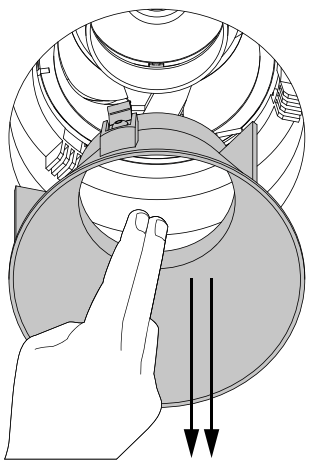


24213 0030  
iMAX II TUBE SQUARE TRIMLESS

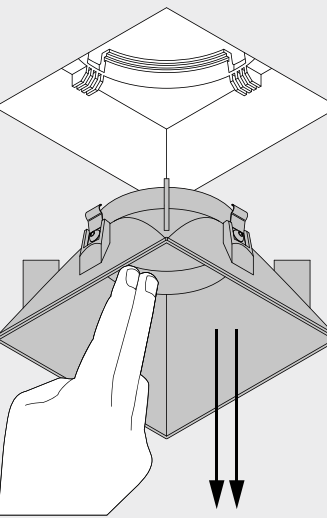


2


ACCESSORIES

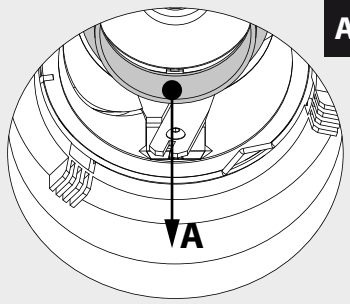


24213 0050  
IMAX II HONEYCOMB B




24213 0060  
IMAX II GLASS SBL




24213 0070  
IMAX II LINEAR SPREAD/  
ELLIPTICAL LENS





24213 0090  
IMAX II SOFTENING LENS



24213 0090  
IMAX II SPREAD LENS



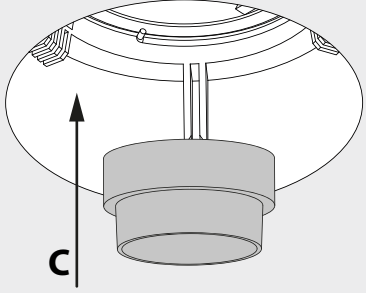

FLAT SIDE



ROUGH SIDE

3

ACCESSOIRES

