




SPYCO ON 2 AC 93033 DIM8

28315 9328 B

AVAILABLE IN
BLACK 28315 9328 B
WHITE 28315 9328 W

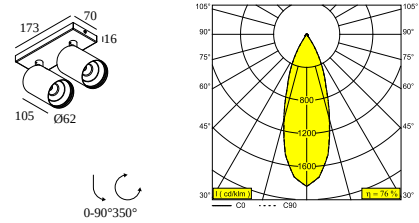

 [View on website](#)




General info	
LOCATION	indoor
INSTALLATION	Ceiling Surface mounted
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.7
ADJUSTABILITY	0° to 90° swiveling, 350° rotatable
INFORMATION	REFLECTOR FL-33° BLACK version: INCL.SPY TUBE S B / WHITE version: INCL.SPY TUBE S W
Electrical info	
ELECTRICAL	230V / 50-60Hz
CLASS	I
DIM TYPE	mains (phase cut-off)
ENERGY CLASS	F
Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	2 x (AC LED array 8W / CRI>90 (R9: 54) / 3000K / 630lm)
TM-30 VALUES	rf: 91 / Rg: 98
SDCM	SDCM3
RISKGROUP	RG1
LM80	L80B10 > 67000
BEAMANGLE	33°
LED TECHNICS (LIGHT SOURCE)	1260lm // 16W // 79lm/W
LED TECHNICS (LUMINAIRE)	954lm // 16W // 60lm/W
Accessories	
SPY TUBE S	

For detailed installation instructions, please consult the manual : [28315_XXX8_HAND.pdf](#)

FINISH YOUR SPECIFICATION

Finish your product

	<u>414 02 00 B</u>	SPY TUBE S B	☐
	<u>414 02 00 FBR</u>	SPY TUBE S FBR	☐
	<u>414 02 00 FG</u>	SPY TUBE S FG	☐
	<u>414 02 00 MMAT</u>	SPY TUBE S MMAT	☐
	<u>414 02 00 SG</u>	SPY TUBE S SG	☐
	<u>414 02 00 W</u>	SPY TUBE S W	☐

Notes: