




BOXY R HE 92740

10746 9230 B-FG

AVAILABLE IN
BLACK-BLACK 10746 9230 B-B
BLACK-FLEMISH BRONZE 10746 9230 B-FBR
BLACK-FLEMISH GOLD 10746 9230 B-FG
WHITE-BLACK 10746 9230 W-B
WHITE-WHITE 10746 9230 W-W

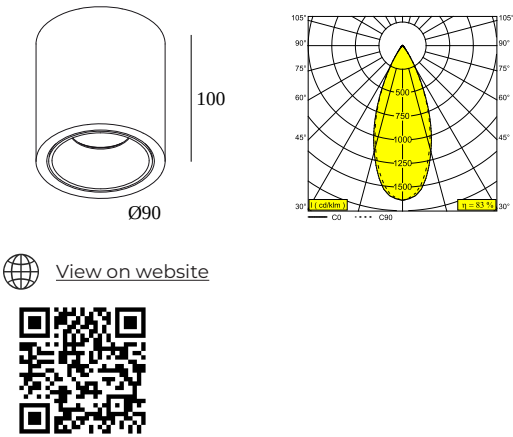

[View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Ceiling Surface mounted
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.6
ADJUSTABILITY	non adjustable
INFORMATION	LENS WFL-40° INCLLED POWER SUPPLY 350mA-DC
Electrical info	
ELECTRICAL	220-240V / 50-60Hz
CLASS	II
POWER SUPPLY	YES
DIM TYPE	non-dimmable
ENERGY CLASS	D
CERTIFICATES	LCA
Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 6W / CRI>90 (R9: 50) / 2700K / 905lm
TM-30 VALUES	rf: 96 / Rg: 99
SDCM	SDCM2
RISKGROUP	RG1
LM80	L90B10 > 50000
BEAMANGLE	40°
LED TECHNICS (LIGHT SOURCE)	905lm // 6W // 150lm/W
LED TECHNICS (LUMINAIRE)	763lm // 6,9W // 111lm/W
Remarks	
High Efficacy : > 100lm/W	
Options	
COVERSET R 100	

For detailed installation instructions, please consult the manual : [10746_XXX0_HAND.pdf](#)

DELTALIGHT

BOXY R HE 92740

10746 9230 B-FG

Notes: