

DELTALIGHT

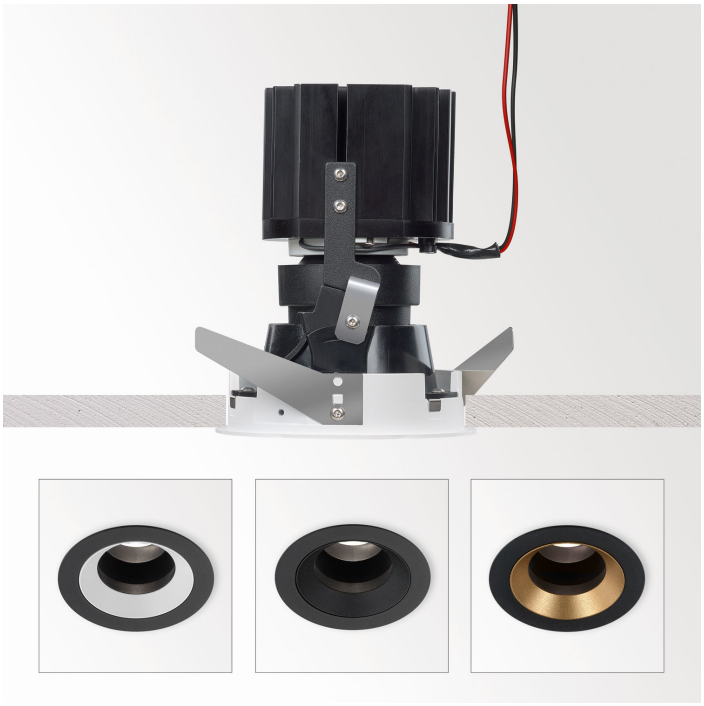


iMAX II ROUND ADJUSTABLE MP 93039

REFERENCE 24211 9330 B

AVAILABLE IN
BLACK 24211 9330 B
WHITE 24211 9330 W





View on website

General info	
LOCATION	indoor
INSTALLATION	Ceiling Recessed
CUTOUT SHAPE/SIZE (MM)	round - 98
RECESSED DEPTH (MM)	155
THICKNESS OF MOUNTING SURFACE (MM)	max.25
INGRESS PROTECTION	IP20 or IP54 (with TUBE IP)
WEIGHT (KG)	0.5
ADJUSTABILITY	0° to 30° swiveling, 355° rotatable
INFORMATION	LENS FL-39° EXCL.LED POWER SUPPLY 350-500mA-DC

Electrical info	
CLASS	III
DIM TYPE	depending on power supply
ENERGY CLASS	E
CERTIFICATES	CB, EAC, ENEC

Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 11,6-17,2W / CRI>90 (R9: 52) / 3000K / 1524-2101lm
SDCM	SDCM1
RISKGROUP	RG1
LM80	L90B10 > 50000
BEAMANGLE	39°
LED TECHNICS (LIGHT SOURCE)	2101lm // 17,2W // 123lm/W
LED TECHNICS (LUMINAIRE)	1414lm // 19,8W // 71lm/W

Remarks

No HONEYCOMB, SPREAD LENS or LINEAR SPREAD LENS @ 500mA !
No accessories with iMAX II TUBE ROUND IP !

Requirements

iMAX II TUBE ROUND
LED POWER SUPPLY 350 / 500mA-DC DIM

Accessories

iMAX II ACCESSOIRES

DELTALIGHT

iMAX II ROUND ADJUSTABLE MP 93039

24211 9330 B


For detailed installation instructions, please consult the manual : **24211_XXXX_HAND.pdf**

CEILING COMPATIBILITY

Ceiling Type	Mounting Kit	
 **System ceiling**	15215 0010 - MOUNTING KIT FLUSH iMAX II ROUND	Required
 **Plasterboard**	15215 0010 - MOUNTING KIT FLUSH iMAX II ROUND	Required
 **Stucanet**	15215 0010 - MOUNTING KIT FLUSH iMAX II ROUND	Required
 **Wood**	-	
 **Stretched ceiling**	-	

FINISH YOUR SPECIFICATION

Emergency units



21032 0270 B EMERGENCY UNIT 7W / 1h + LED INDICATOR HOLDER B

Cutout dimension (mm): 27


21032 0270 W EMERGENCY UNIT 7W / 1h + LED INDICATOR HOLDER W

LED power supplies

of Fixtures

ⓘ # of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current




300 48 350 ED1 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM1 — 1

Dimtype: 1-10V

Cutout dimension (mm): 30

iMAX II ROUND ADJUSTABLE MP 93039


24211 9330 B



300 48 350 ED5 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5 — 1

Dimtype: DALI


Cutout dimension (mm): 45



300 48 350 MDL LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W MDL — 1

Dimtype: non-dimmable


Cutout dimension (mm): 30



300 48 350 WDL LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W WDL — 1

Dimtype: WDL = wireless dimmable


Cutout dimension (mm): 45



300 48 500 ED1 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM1 — 1

Dimtype: 1-10V


Cutout dimension (mm): 30



300 48 500 ED5 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM5 — 1

Dimtype: DALI


Cutout dimension (mm): 45



300 48 500 MDL LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W MDL — 1

Dimtype: non-dimmable


Cutout dimension (mm): 30



300 48 500 WDL LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W WDL — 1

Dimtype: WDL = wireless dimmable


Cutout dimension (mm): 45



300 90 61 LED POWER SUPPLY MULTI-POWER DIM6 — 1 | 1

Dimtype: mains (phase cut-off) or push button


Cutout dimension (mm): 56



300 90 63 LED POWER SUPPLY MULTI-POWER DIM9 — 2(2) | 2(2)

Dimtype: 1-10V or DALI or push button

Cutout dimension (mm): 82




300 90 64 LED POWER SUPPLY MULTI-POWER DIM7 — 1(1) | 1(0)

Dimtype: 1-10V or push button

Cutout dimension (mm): 72


iMAX II ROUND ADJUSTABLE MP 93039

24211 9330 B



300 90 67 LED POWER CONVERTER 24V-DC TO MULTI CURRENT 48W DIM9 1 | -


Dimtype: 1-10V or DALI or push button



300 90 68 LED POWER SUPPLY MULTI-POWER DIM5 1(1) | 1(0)

Dimtype: DALI


Cutout dimension (mm): 72



300 90 69 LED POWER SUPPLY MULTI-POWER HV DIM9 3(3) | 3(2)

Dimtype: 1-10V or DALI or push button


Cutout dimension (mm): 84



300 90 124 LED POWER SUPPLY MULTI-POWER DIM7 1(1) | 1(0)

Dimtype: 1-10V or push button


Cutout dimension (mm): 55



300 90 125 LED POWER SUPPLY MULTI-POWER MINI DIM5 1(1) | 1(0)

Dimtype: DALI


Cutout dimension (mm): 55



300 90 135 LED POWER SUPPLY MULTI-POWER HV 2->2 | 2

Dimtype: non-dimmable


Cutout dimension (mm): 90



21012 0010 LED POWER SUPPLY MULTI POWER 1 | 1

Dimtype: non-dimmable


Cutout dimension (mm): 50



21012 0021 LED POWER SUPPLY MULTI POWER DIM1 1 | 1

Dimtype: 1-10V


Cutout dimension (mm): 54



21012 0035 LED POWER SUPPLY MULTI POWER DIM5 1 | 1

Dimtype: DALI

Cutout dimension (mm): 54




21012 004W LED POWER SUPPLY MULTI-POWER WDL 2(2) | 2(2)

Dimtype: WDL = wireless dimmable

Cutout dimension (mm): 84

iMAX II ROUND ADJUSTABLE MP 93039


24211 9330 B



21012 005W LED POWER SUPPLY MULTI-POWER COMPACT WDL — 1 | 1

Dimtype: WDL = wireless dimmable


Cutout dimension (mm): 54



21012 0268 LED POWER SUPPLY MULTI POWER 200-350 / 15W DIM8 — 1

Dimtype: mains (phase cut-off)


Cutout dimension (mm): 50



21012 0288 LED POWER SUPPLY MULTI POWER 500-700 / 36W DIM8 — 1

Dimtype: mains (phase cut-off)


Cutout dimension (mm): 55



21012 0298 LED POWER SUPPLY MULTI POWER 250-900 / 20W DIM8 — 1 | 1

Dimtype: mains (phase cut-off)


Cutout dimension (mm): 48



21012 0480 LED POWER SUPPLY 350mA-DC / 17W IP68 — 1(1)

Dimtype: non-dimmable


Cutout dimension (mm): 60



21012 0500 LED POWER SUPPLY 500mA-DC / 24W IP68 — 1(0)

Dimtype: non-dimmable


Cutout dimension (mm): 60



21032 0295 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5 — 1

Dimtype: DALI

Cutout dimension (mm): 30




21032 0305 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM5 — 1

Dimtype: DALI

Cutout dimension (mm): 30

Mounting kits




15215 0010 MOUNTING KIT FLUSH iMAX II ROUND

Cutout dimension (mm): 121


iMAX II ROUND ADJUSTABLE MP 93039

24211 9330 B


Light altering devices




24213 0050 B iMAX II HONEYCOMB B




24213 0060 iMAX II GLASS SBL



24213 0070 iMAX II LINEAR SPREAD LENS



24213 0090 iMAX II SOFTENING LENS



24213 0100 iMAX II SPREAD LENS

Finish your product




24213 0010 B iMAX II TUBE ROUND B

24213 0010 FG iMAX II TUBE ROUND FG

24213 0010 MMAT iMAX II TUBE ROUND MMAT

24213 0010 W iMAX II TUBE ROUND W



24213 0040 B iMAX II TUBE ROUND IP B

DELTALIGHT

iMAX II ROUND ADJUSTABLE MP 93039

24211 9330 B

24213 0040 FG	iMAX II TUBE ROUND IP FG	☐
24213 0040 MMAT	iMAX II TUBE ROUND IP MMAT	☐
24213 0040 W	iMAX II TUBE ROUND IP W	☐

Notes: