




SHELFLINE

A series of miniature profiles, to be finished with the ledflex of your choice.
Ideal to softly enlighten shelves, cupboards, wardrobes or for other indirect lighting applications.


www.deltalight.com/shelfline

PRO

A




SHELFLINE		20 ST	18	19
1 PROFILE				
PROFILE / m		398 01 00 ◇	398 02 00 ◇	398 03 00 ◇
MAX. LENGTH PER PROFILE SECTION 3m		◇ ANO ●	◇ ANO ●	◇ ANO ●
POLYCARBONATE / m				
SANDBLASTED (SBL)		INCLUDED	INCLUDED	398 03 05 SBL
CLEAR		-	-	398 03 05 CL
2 DIMENSIONS				
The length of each profile needs to be defined in mm and will depend on the shape and construction of the design and the light modules selected to go in to each profile section.				
3 JUNCTION / CORNER				
4 ENDCAP				
ENDCAP (2 PCS.)		398 01 03 01 A	398 02 03 01 A	398 03 03 01 A
5 FIXATION				
SURFACE MOUNTED				
MOUNTING CLIP (10 PCS.)		-	398 02 06 11	398 03 06 11
MOUNTING CLIP 45° (10 PCS.)		-	398 02 06 45	398 03 06 45
6 CONNECTION				
7 LED FLEX		LIGHT MODULES		
		NEXT PAGE		

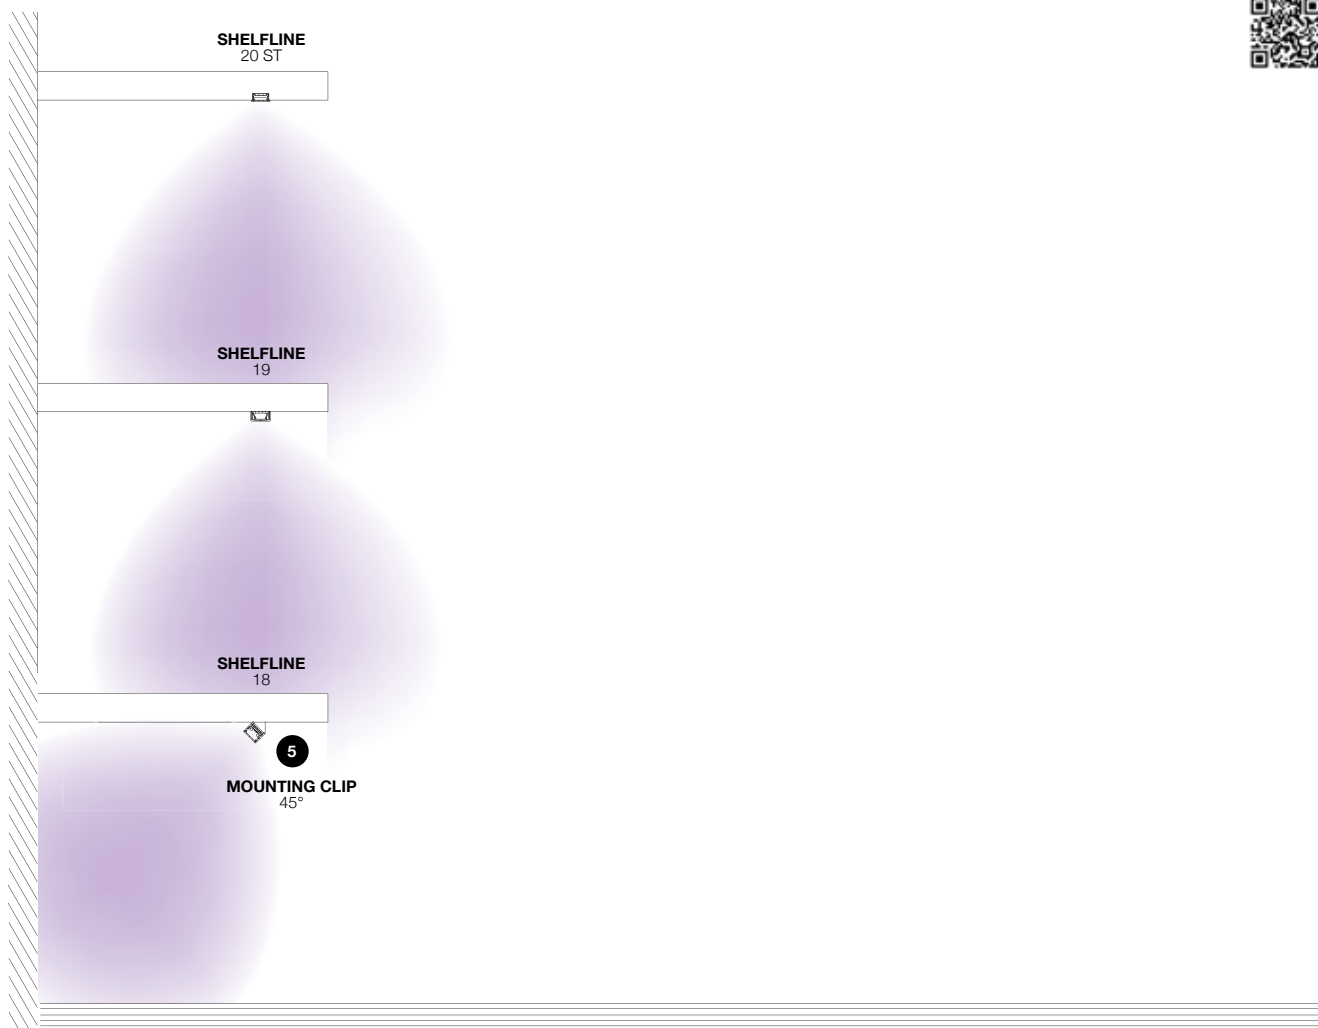

PRO

PROFILES



5m - 24V-DC
NOTV MOUNTED

Dividable
per 25 mm
Continuous LED

9W/m
608lm/m

LEDFLEX		IN CL
4000K CRI > 90	IN	21030 0340
3000K CRI > 90	IN	21030 0320
2700K CRI > 90	IN	21030 0310

LED POWER SUPPLY 24V-DC MORE INFO TECHNICAL CHAPTER (MAX. 5M/POWERLINE)

NON DIM	24W / IP20	21012 0160	max. 2,6m
	150W / IP67	300 89 24 150	max. 16,6m
0-10V DIM (DIM1)	60W / IP20	21012 0171	max. 6,6m
	90W / IP20	21012 0181	max. 10m
	120W / IP20	21012 0191	max. 13,3m
	60W / IP67	21012 0101	max. 6,6m
	90W / IP67	21012 0111	max. 10m
	120W / IP67	21012 0121	max. 13,3m
DALI (DIM5)	60W / IP20	21012 0205	max. 6,6m
	100W / IP20	21012 0225	max. 11,1m
	60W / IP67	21012 0135	max. 6,6m
	90W / IP67	21012 0145	max. 10m
	120W / IP67	21012 0155	max. 13,3m