




MIKALINE-OH! L298 93034 MDL

30616 9320 GC

AVAILABLE IN
BLACK 30616 9320 B
GOLD COLOURED 30616 9320 GC

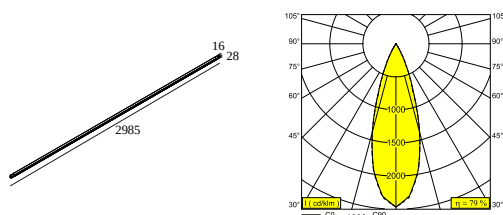

 [View on website](#)



General info

LOCATION	indoor
INSTALLATION	Ceiling Surface mounted,Ceiling Suspended,Wall Surface mounted
INGRESS PROTECTION	IP20
WEIGHT (KG)	1.6
ADJUSTABILITY	non adjustable
INFORMATION	INCL.PLUG-IN-48V CABLE 11cm black EXCL.LED POWER SUPPLY 48V-DC connection max.140W (3A)

Electrical info

ELECTRICAL	48V-DC
CLASS	III
DIM TYPE	MDL = 1-10V or DALI or push button
ENERGY CLASS	F
CERTIFICATES	CB, ENEC

Lightsource info

LIGHTSOURCE NAME	LED
LIGHTSOURCE	4 x (LED cluster 5,2W / CRI>90 (R9: 50) / 3000K / 596lm)
TM-30 VALUES	Rf: 90 / Rg: 101
SDCM	SDCM3
LM80	L80 > 60000
BEAMANGLE	34°
LED TECHNICS (LIGHT SOURCE)	2384lm // 20,8W // 115lm/W
LED TECHNICS (LUMINAIRE)	1884lm // 23,9W // 79lm/W

Requirements

LED POWER SUPPLY 48V-DC (Remote)
 DIMMABLE MODULATOR
 POWERBOX 48V-DC PLUG-IN


Options

MIKALINE - JUNCTION / FIXATION
 MIKALINE - CABLE SUSPENSION
 PLUG-IN 48V CABLE
 CONNECTION CLIP 1 x PLUG-IN 48V
 CEILING BASE PLUG-IN 48V

For detailed installation instructions, please consult the manual : [30616_XXX0_HAND.pdf](#)

FINISH YOUR SPECIFICATION


SMART 48



300 90 011 SMART 48 MODULATOR DIM9

☐

Dimtype: 1-10V or DALI or push button




300 90 012 SMART 48 MODULATOR WD


☐

Dimtype: WDL = wireless dimmable


Current supply



30610 0100 PLUG-IN 48V CABLE 11cm black

☐

30610 0110 PLUG-IN 48V CABLE 1,5m black

☐

30610 0120 PLUG-IN 48V CABLE 3m black

☐

30610 0140 B CONNECTION CLIP 1 x PLUG-IN 48V B

☐


Cutout dimension (mm): 51

DELTALIGHT

MIKALINE-OH! L298 93034 MDL


30616 9320 GC

LED power supplies




300 89 48 100 LED POWER SUPPLY 48V-DC / 100W DIN

Dimtype: non-dimmable



300 89 48 240 LED POWER SUPPLY 48V-DC / 240W DIN


Dimtype: non-dimmable



21012 0230 LED POWER SUPPLY 48V-DC / 100W

Dimtype: non-dimmable


Cutout dimension (mm): 40



21012 0240 LED POWER SUPPLY 48V-DC / 200W

Dimtype: non-dimmable

Cutout dimension (mm): 40



30610 0190 POWER ADAPTER 48V-DC / 60W PLUG-IN

Dimtype: non-dimmable



Power box



30610 0170 B POWERBOX 48V-DC / 100W PLUG-IN B

Dimtype: non-dimmable



Suspension parts



30610 0080 B MIKALINE - CABLE SUSPENSION SINGLE 1,6m B




DELTALIGHT

MIKALINE-OH! L298 93034 MDL

30616 9320 GC

Fixation components

	30610 0010 C MIKALINE - JUNCTION 2 FLEX SET C	☐
	30610 0020 C MIKALINE - JUNCTION 3 FLEX C	☐
	30610 0030 C MIKALINE - JUNCTION 4 FLEX C	☐
	30610 0040 C MIKALINE - JUNCTION 2 HINGE C	☐
	30610 0050 C MIKALINE - FIXATION SIDE SET C	☐
	30610 0060 B MIKALINE - FIXATION SPACER FLEX SET B	☐
	30610 0070 C MIKALINE - FIXATION H/V FLEX C	☐
	30610 0090 B MIKALINE - FIXATION SPACER SET B	☐
	30610 0180 B MIKALINE - SPACER 90° 2 SET B	☐

DELTALIGHT

MIKALINE-OH! L298 93034 MDL

30616 9320 GC

Ceiling bases



30610 0150 B CEILING BASE 3 x PLUG-IN 48V B

☐

30610 0160 B CEILING BASE 1 x PLUG-IN 48V B

☐

Notes: