


LASS-OH LINEAR

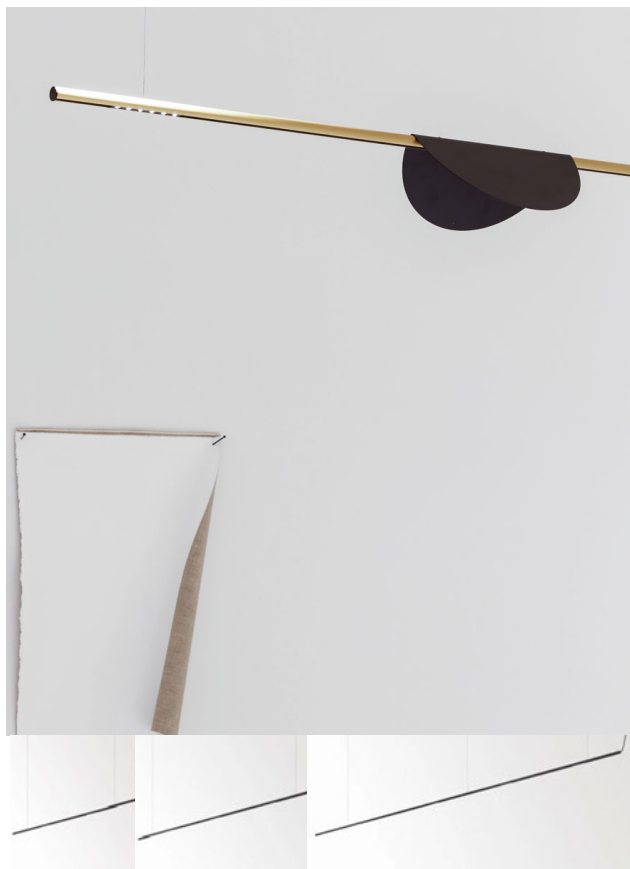

Lass-Oh! glides through the room as a snake sliding through the greensward, showing off its slim cylindrical contour in combination with the miniature LED clusters hidden inside its body. Straight lines in combination with the optional shades make of Lass-Oh! a very decorative lighting solution. Nevertheless, Lass-Oh! can easily be hung in every residential, retail or office project thanks to its low-glare LED dots that are hidden away into the profile.

Specification	
Aperture:	5/16"
Installation method:	4" J-Box or Power Box
Adjustability:	Fixed
Rating:	IP20

Performance	
LED Maintenance:	L80>60,000h
McAdam Step:	3
CRI:	90

Power	HP
Lass-Oh L15:	3 X 7W
Lass-Oh L21:	4 X 7W
Lass-Oh L33:	6 X 7W

Delivered Lumens	2700K	3000K	3500K
Lass-Oh L15 HP:	1577Lm	1619Lm	1686Lm
Lass-Oh L21 HP:	2102Lm	2159Lm	2248Lm
Lass-Oh L33 HP:	3153Lm	3239Lm	3371Lm

Listing

ETL certified to US and Canadian safety standards.

Warranty

5-year limited warranty.

Ordering

ALL BOXES MUST BE FILLED IN TO CORRECTLY ORDER

Example: LSOL33-HPMD30-GC-PCNA-PBBD14-UNV

Luminaire	Shape	Length	Power	Optic	CCT	Finish	Style	Installation	Application	Controls***
LSO LASS-OH	L Linear	15 1502mm / 59 1/8"	HP High Power	MD Medium Spot 34°	27 2700K	B Black	PC Pendant, cable suspended ⁽¹⁾	PRB Round black coverplate for 4" junction box	RMT Remote Power Supply	D1-UNV 0-10V dim 120-277V
		21 2111mm / 83 1/8"			30 3000K			PSB Square black coverplate for 4" junction box		D1-347 0-10V dim 347V
		33 3331mm / 131 1/8"			35 3500K			NA No accessory	PBB ⁽²⁾ Power Box Black	D14-UNV 0-10V dim 120-277V / FE ELV dim 120V

¹ Length 15 & 21 have 2 suspension points; Length 33 has 3 suspension points.
² Power Box not offered in Length 15.

*** Contact factory for Dali, DMX, or other dimming options.

Related Products


Lass-Oh, Dot.Com, Inform L


Finish Options


LASS-OH L15 HP


LASS-OH L21 HP


LASS-OH L33 HP












BLACK


GOLD COLORED

Accessories




JIHA! R - 24814 0030 B


BLACK




ALT VIEW



INSTALLED ON BLACK




INSTALLED ON GOLD




JIHA! R - 24814 0020 B


BLACK



ALT VIEW



INSTALLED ON BLACK



INSTALLED ON GOLD

Photometric Data





Installation Options



REMOTE DRIVER (With Controls D1)

PR - COVERPLATE R 104 B

PS - COVERPLATE 3 103 B


A: 8" x B: 2"-3/16 x C: 4"-1/4
A: 203mm x B: 72mm x C: 108mm

- For Remote application
- ETL Listed
- Damp rated



Ø108mm
Ø4" 1/4


BLACK
Requires 4" junction box



108mm
4" 1/4

BLACK
Requires 4" junction box

PBB - POWER BOX



BLACK

Driver Options

D1

- Dimming Control 0-10V
- Dimming Range 1-100%
- Dim to off yes at 0.7mA
- Power Factor @ Full Load >0.9
- Efficiency @ Full Load ≥87
- THD @ Full Load <20%
- Title 24 Compliant

Dimmer Compatibility

- Leviton IP710-DLZ
- Lutron DTVV-XX
- WattStopper ADF-120277
- Synergy Lighting Controls ISD BC

D14

- Dimming Control Phase Control or -10V
- Dimming Range 1-100%
- Dim to off yes
- Power Factor @ Full Load >0.9
- Efficiency @ Full Load ≥90
- THD @ Full Load <20%

Dimmer Compatibility Phase

- Leviton IP1106-1LZ / 6631-2
- Leviton DVELV-303P / MAELV-600

Dimmer Compatibility 0-10V

- Leviton IP710-DLZ
- Leviton DTVV-XX

As technology changes, please use information above as guidance. For most recent updated information please contact factory. Specifications subject to change without notice.