




M26L - HALOSCAN HP SOFT 93021 MDL

REFERENCE 23131 9020 B

AVAILABLE IN  
BLACK 23131 9020 B  
WHITE 23131 9020 W

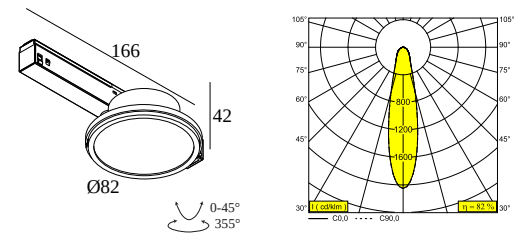

[View on website](#)



| General info       |                                                |
|--------------------|------------------------------------------------|
| LOCATION           | indoor                                         |
| INSTALLATION       | Low voltage systems Low voltage system mounted |
| INGRESS PROTECTION | IP20                                           |
| WEIGHT (KG)        | 0.3                                            |
| ADJUSTABILITY      | 0° to 45° swiveling, 355° rotatable            |
| INFORMATION        | LENS FL-21°<br>EXCL.LED POWER SUPPLY 48V-DC    |

| Electrical info |                                    |
|-----------------|------------------------------------|
| ELECTRICAL      | 48V-DC                             |
| CLASS           | III                                |
| DIM TYPE        | MDL = 1-10V or DALI or push button |
| ENERGY CLASS    | E                                  |
| CERTIFICATES    | CB, ENEC                           |

| Lightsource info            |                                                          |
|-----------------------------|----------------------------------------------------------|
| LIGHTSOURCE NAME            | LED                                                      |
| LIGHTSOURCE                 | LED array 11,8W / CRI>90 (R9: 50) / 3000K-1800K / 1307lm |
| TM-30 VALUES                | Rf: 90 / Rg: 99                                          |
| SDCM                        | SDCM2                                                    |
| RISKGROUP                   | RG1                                                      |
| LM80                        | L90B10 > 50000                                           |
| BEAMANGLE                   | 21°                                                      |
| LED TECHNICS (LIGHT SOURCE) | 1307lm // 11,8W // 110lm/W                               |
| LED TECHNICS (LUMINAIRE)    | 1071lm // 13,6W // 79lm/W                                |

| Remarks                                                    |
|------------------------------------------------------------|
| Take a look at our <a href="#">MAGNETIC PROFILES movie</a> |

| Requirements            |
|-------------------------|
| LED POWER SUPPLY 48V-DC |

| Options            |
|--------------------|
| DIMMABLE MODULATOR |

| Accessories                 |
|-----------------------------|
| HALOSCAN HONEYCOMB          |
| HALOSCAN LINEAR SPREAD LENS |

## M26L - HALOSCAN HP SOFT 93021 MDL

23131 9020 B

For detailed installation instructions, please consult the manual : [23131\\_XXX0\\_HAND.pdf](#)


### FINISH YOUR SPECIFICATION

#### Current supply

#### # of Fixtures

 # of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current



**21032 0030** SMART 48 MODULATOR PLUG-IN WD

14


Dimtype: WDL = wireless dimmable

#### SMART 48

#### # of Fixtures

 # of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.


Min current | Max current



**300 90 011** SMART 48 MODULATOR DIM9

14

Dimtype: 1-10V or DALI or push button



**300 90 012** SMART 48 MODULATOR WD

14


Dimtype: WDL = wireless dimmable

#### LED power supplies

#### # of Fixtures

 # of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current






**300 89 48 100** LED POWER SUPPLY 48V-DC / 100W DIN

7



Dimtype: non-dimmable

M26L - HALOSCAN HP SOFT 93021 MDL




23131 9020 B

|                                                                                  |                                                         |    |                          |
|----------------------------------------------------------------------------------|---------------------------------------------------------|----|--------------------------|
|  | <b>300 89 48 240</b> LED POWER SUPPLY 48V-DC / 240W DIN | 17 | <input type="checkbox"/> |
| Dimtype: non-dimmable                                                            |                                                         |    |                          |
|  | <b>21012 0230</b> LED POWER SUPPLY 48V-DC / 100W        | 7  | <input type="checkbox"/> |
| Dimtype: non-dimmable                                                            |                                                         |    |                          |
| Cutout dimension (mm): 40                                                        |                                                         |    |                          |
|  | <b>21012 0240</b> LED POWER SUPPLY 48V-DC / 200W        | 14 | <input type="checkbox"/> |
| Dimtype: non-dimmable                                                            |                                                         |    |                          |
| Cutout dimension (mm): 40                                                        |                                                         |    |                          |

Light altering devices

|                                                                                    |                                               |                          |
|------------------------------------------------------------------------------------|-----------------------------------------------|--------------------------|
|  | <b>23110 0040</b> HALOSCAN LINEAR SPREAD LENS | <input type="checkbox"/> |
|  | <b>23110 0050 B</b> HALOSCAN HONEYCOMB B      | <input type="checkbox"/> |


COMPATIBLE COMPOSABLES

| SHIFTLINE M26L profile (+ SHIFTLINE M26L MATRIX)                                    | Available Colours                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|  |            |

# DELTALIGHT

## M26L - HALOSCAN HP SOFT 93021 MDL

23131 9020 B




**23358 0030** SLM26L - PROFILE 3m




### SHIFTLINE M35R profile


### Available Colours




**23375 0000** SLM35R - PROFILE



**23375 0010** SLM35R - PROFILE 1m



**23375 0020** SLM35R - PROFILE 2m



**23375 0030** SLM35R - PROFILE 3m



Notes: