

M-OCTAV 27 & 39



However you look at it, Octav draws the attention. Its design catches the eye, and after a first glimpse for sure you will be intrigued to look at it again. Depending on the inclination angle of the adjustable spotlight, other design elements stand out. Be it the squared design that is in complete contrast with the rounded back part, creating some visual tension. Or be it the details on how the hinge is being camouflaged inside the body, nearly invisible yet very functional. Or be it the optical compartment, hidden away comfortably into the spotlight, unobtrusive for the eye.

Specification	Octav 27	Octav 39
Aperture:	1 1/8"	1 1/2"
Adjustability:	Adjustable 0-85° / 355°	Adjustable 0-85° / 360°
Rating:	Damp	

Performance	Octav 27	Octav 39
CRI / TM-30 (3000K):	90 / Rf: 90 / Rg: 99	
SDCM:	1	
LED Maintenance:	L90B10>50,000h	
*Standard Power:	7W	10W

Delivered Lumens	2700K		3000K		3500K	
**Optic:	MS	MD	MS	MD	MS	MD
Octav 27:		276		288		299
Octav 39:	652	705	683	737	707	764

Listing

ETL certified to US and Canadian safety standards.

Warranty

5-year limited warranty.

Ordering

ALL BOXES MUST BE FILLED IN TO CORRECTLY ORDER

Example: OCT39-A35MSSP-GC-B-ML-D5

		-				-		-		-	
Luminaire	Size	Function	CCT	Optic**	Power*	Finish	Inner Finish	Application ¹	Controls		
OCT OCTAV	27 28mm / 1-1/8" Square	A Adjustable	27 2700K	MD Medium Spot 30°	SP Standard Power	B Black	B Black	M20H Shiftline M26H / Shiftline M26H + SBL ² / Splitline M20 / Splitline M20 ST Profile	MDL ² 0-10V dim via Modulator		
	30 3000K		FBR Flemish Bronze								
			35 3500K			FG Flemish Gold					
						GC Gold Colored		ML Shiftline M26L Profile	D5 Dali dim		
						W White			WD ² Wireless dim		
	39 38mm / 1-1/2" Square	A Adjustable	27 2700K	MS Medium Narrow Spot 20*	SP Standard Power	B Black	B Black				
			30 3000K			FBR Flemish Bronze				FBR Flemish Bronze	
			35 3500K	MD Medium Spot 40°		FG Flemish Gold	FG Flemish Gold				
						GC Gold Colored	GC Gold Colored				
						W White	W White				

¹ Low voltage system hardware specified separately.
² Shiftline M²H + SBL only available with Controls D5.

Related Products

M-Spy, M-Vizir/Hedra, Vizir/Hedra

DELTALIGHT

www.deltalight.com



Finish Options

OCTAV 27

For Application M20H

For Application ML

BLACK
(shown in Shiftline M26L)

FLEMISH BRONZE
(shown in Shiftline M26L)

FLEMISH GOLD
(shown in Shiftline M26L)

GOLD COLORED
(shown in Shiftline M26L)

WHITE
(shown in Shiftline M26L)

OCTAV 39

For Application M20H

For Application ML

BLACK
(shown in Shiftline M26L)

FLEMISH BRONZE
(shown in Shiftline M26L)

FLEMISH GOLD
(shown in Shiftline M26L)

GOLD COLORED
(shown in Shiftline M26L)

WHITE
(shown in Shiftline M26L)

OCTAV 39 INNER FINISH

32mm
1'-1/4

Ø35mm
Ø1'-3/8

BLACK

FLEMISH BRONZE

FLEMISH GOLD


GOLD COLORED

WHITE

Photometric Data

OCTAV 27

OCTAV 39

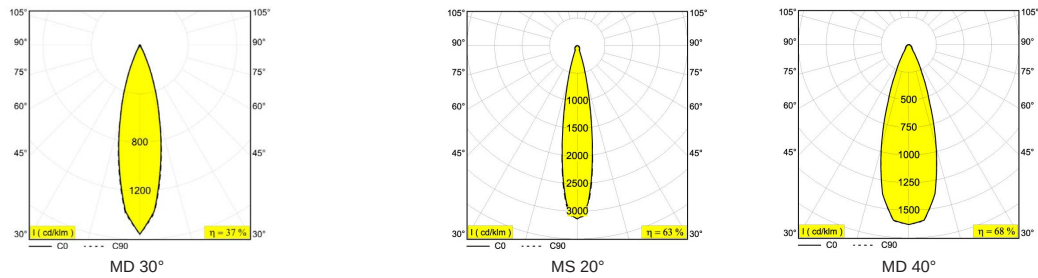

Installation Options

Delta Light's Magnetic Systems all utilize 48V remote power supplies. With a maximum of 96W per power supply, the below details maximum magnetic modules per power feed.

Maximum Capacity per Remote Power Supply	M-Octav 27	M-Octav 39
*Standard Power:	13	9

FOR SYSTEM HARDWARE, REFER TO THE FOLLOWING PROFILE SYSTEMS:
Shiftline M26H (surface/suspended, high-height, optional curved corner connectors)
Shiftline M26H + SBL (surface/suspended, high-height, integral continuous light line)
Shiftline M26L (surface/suspended, low-height, stacking possible)
Splitline M20
Splitline M20 ST (recessed, small trim)

As technology changes, please use information above as guidance. For most recent updated information please contact factory. Specifications subject to change without notice.