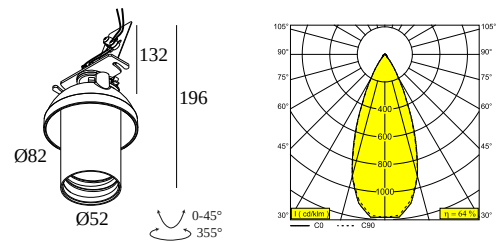




SPY 52 TRIMLESS TW 96545

19813 9030 B

AVAILABLE IN
BLACK 19813 9030 B
WHITE 19813 9030 W



 [View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Ceiling Recessed
CUTOUT SHAPE/SIZE (MM)	round - Ø KIT
RECESSED DEPTH (MM)	80
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.4
ADJUSTABILITY	0° to 45° swiveling, 355° rotatable
INFORMATION	REFLECTOR WFL-45° EXCLLED POWER SUPPLY 500mA-DC TW - (DALI DT8) Optional REFLECTORS 20° & 30° available
Electrical info	
CLASS	III
DIM TYPE	depending on power supply
ENERGY CLASS	E
CERTIFICATES	CB, ENEC
Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 9W / CRI>90 (R9: 50) / 2700K-6500K / 1087lm
TM-30 VALUES	rf: 89 / Rg: 100
SDCM	SDCM2
RISKGROUP	RG1
LM80	L90B10 > 50000
BEAMANGLE	45°
LED TECHNICS (LIGHT SOURCE)	1087lm // 9W // 121lm/W
LED TECHNICS (LUMINAIRE)	695lm // 10,4W // 67lm/W

Requirements
SPY 52 TUBE
MOUNTING KIT SPY 39/52 TRIMLESS O.F.A.
MOUNTING KIT AIR 103
LED POWER SUPPLY 500mA-DC TW (Remote)

Accessories
HONEYCOMB 42
SPREAD LENS 42
LINEAR SPREAD LENS 42
SOFTENING LENS 42
GLASS SBL 42

SPY 52 TRIMLESS TW 96545


19813 9030 B

For detailed installation instructions, please consult the manual : [19813_XXX0_HAND.pdf](#)

CEILING COMPATIBILITY

Ceiling Type	Mounting Kit	
 System ceiling	 15212 2030 - MOUNTING KIT SPY 39/52 TRIMLESS O.F.A.	Required
 Plasterboard	 15212 2030 - MOUNTING KIT SPY 39/52 TRIMLESS O.F.A.	Required
 Stucanet	 15212 2030 - MOUNTING KIT SPY 39/52 TRIMLESS O.F.A.	Required
 Concrete + plaster	 15212 2030 - MOUNTING KIT SPY 39/52 TRIMLESS O.F.A.	Required
 Lintel + plaster	 15212 2030 - MOUNTING KIT SPY 39/52 TRIMLESS O.F.A.	Required
 Hollow-core slab + plaster	 15212 2030 - MOUNTING KIT SPY 39/52 TRIMLESS O.F.A.	Required
 Stretched ceiling	 15212 0080 - MOUNTING KIT SPY 39/52 TRIMLESS CSC	Required
	 15212 0160 - MOUNTING KIT SPY 39/52 TRIMLESS WSC	Required


FINISH YOUR SPECIFICATION

LED power supplies	# of Fixtures
 # of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the ' ' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.	
 21012 0355 LED POWER SUPPLY 500mA-DC 2CH TW DIM5 Dimtype: DALI Cutout dimension (mm): 85	Min current Max current 2

SPY 52 TRIMLESS TW 96545

19813 9030 B

Mounting kits



15212 2030 MOUNTING KIT SPY 39/52 TRIMLESS O.F.A.

Cutout dimension (mm): 105

☐

Mounting kits stretched ceiling



15212 0080 MOUNTING KIT SPY 39/52 TRIMLESS CSC


☐



15212 0160 MOUNTING KIT SPY 39/52 TRIMLESS WSC

☐

Mounting kits side air + light




29810 0030 MOUNTING KIT SIDE AIR 103

Cutout dimension (mm): 168

☐

Mounting kits top air + light




29810 0230 MOUNTING KIT TOP AIR 103

Cutout dimension (mm): 135

☐

Mounting kits side air only



29810 0100 MOUNTING KIT SIDE AIR ONLY 1

Cutout dimension (mm): 168


☐

DELTALIGHT

SPY 52 TRIMLESS TW 96545

19813 9030 B

Mounting kits top air only




29810 0200 MOUNTING KIT TOP AIR ONLY 1



Cutout dimension (mm): 135

Mounting kits no air



29810 0070 MOUNTING KIT NO AIR 103








Cutout dimension (mm): 168

DELTALIGHT


SPY 52 TRIMLESS TW 96545

19813 9030 B

Light altering devices

	19810 0010 B HONEYCOMB 42 SINGLE USE B	☐
	19810 0020 LINEAR SPREAD LENS 42	☐
	19810 0030 SPREAD LENS 42	☐
	19810 0040 SOFTENING LENS 42	☐
	19810 0050 GLASS SBL 42	☐
	19810 0060 B HONEYCOMB 42 DOUBLE USE B	☐

Finish your product

	19810 0100 B SPY 52 TUBE B	☐
	19810 0100 FBR SPY 52 TUBE FBR	☐
	19810 0100 FG SPY 52 TUBE FG	☐
	19810 0100 GC SPY 52 TUBE GC	☐

DELTALIGHT


SPY 52 TRIMLESS TW 96545

19813 9030 B


19810 0100 W SPY 52 TUBE W

☐


Replaceable reflector / lens



19810 0180 SPY 52 REFLECTOR 20°

☐

19810 0190 SPY 52 REFLECTOR 45°

☐

19810 0240 SPY 52 REFLECTOR 30°

☐

Notes: