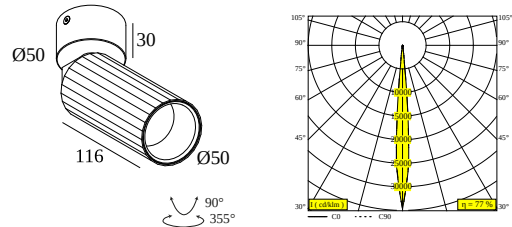




HEDRA ON 93008

22525 9310 BBR-B

AVAILABLE IN
BLACK-BLACK 22525 9310 B-B
BLACK BRONZE-BLACK 22525 9310 BBR-B
GOLD COLORED-BLACK 22525 9310 GC-B
WHITE-WHITE 22525 9310 W-W



[View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Ceiling Surface mounted
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.3
ADJUSTABILITY	0° to 90° swiveling, 355° rotatable
INFORMATION	LENS SP-8° EXCL.LED POWER SUPPLY 350-500mA-DC

Electrical info	
CLASS	III
DIM TYPE	depending on power supply
ENERGY CLASS	F
CERTIFICATES	CB, ENEC

Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 3,9-5,7W / CRI>90 (R9: 55) / 3000K / 385-519lm
TM-30 VALUES	rf: 92 / Rg: 98
SDCM	SDCM2
RISKGROUP	RG2 (threshold 0,6m)
LM80	L90B10 > 41000
BEAMANGLE	8°
LED TECHNICS (LIGHT SOURCE)	519lm // 5,7W // 90lm/W
LED TECHNICS (LUMINAIRE)	397lm // 6,6W // 61lm/W

Requirements	
VIZIR TUBE	
LED POWER SUPPLY 350 / 500mA-DC DIM	

Options	
COVERSET R 90-100	

Accessories	
VIZIR HONEYCOMB	
VIZIR SOFTENING LENS	

HEDRA ON 93008

22525 9310 BBR-B

For detailed installation instructions, please consult the manual : [22525_XXX0_HAND.pdf](#)

FINISH YOUR SPECIFICATION

LED power supplies

of Fixtures



of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current




300 48 350 ED1 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM1

3

Dimtype: 1-10V

Cutout dimension (mm): 30



300 48 350 ED5 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5

3

Dimtype: DALI

Cutout dimension (mm): 45



300 48 350 MDL LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W MDL

3

Dimtype: non-dimmable

Cutout dimension (mm): 30




300 48 350 WDL LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W WDL

3

Dimtype: WDL = wireless dimmable

Cutout dimension (mm): 45




300 48 500 ED1 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM1

3

Dimtype: 1-10V

Cutout dimension (mm): 30



300 48 500 ED5 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM5

3

Dimtype: DALI

Cutout dimension (mm): 45



300 48 500 MDL LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W MDL

3

Dimtype: non-dimmable

Cutout dimension (mm): 30






HEDRA ON 93008

22525 9310 BBR-B

	300 48 500 WDL LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W WDL	3	☐
Dimtype: WDL = wireless dimmable			
Cutout dimension (mm): 45			
	300 90 61 LED POWER SUPPLY MULTI-POWER DIM6	3 3	☐
Dimtype: mains (phase cut-off) or push button			
Cutout dimension (mm): 56			
	300 90 63 LED POWER SUPPLY MULTI-POWER DIM9	6(6) 6(6)	☐
Dimtype: 1-10V or DALI or push button			
Cutout dimension (mm): 82			
	300 90 64 LED POWER SUPPLY MULTI-POWER DIM7	2->4(3) 4(2)	☐
Dimtype: 1-10V or push button			
Cutout dimension (mm): 72			
	300 90 67 LED POWER CONVERTER 24V-DC TO MULTI CURRENT 48W DIM9	3	☐
Dimtype: 1-10V or DALI or push button			
	300 90 68 LED POWER SUPPLY MULTI-POWER DIM5	4(3) 4(2)	☐
Dimtype: DALI			
Cutout dimension (mm): 72			
	300 90 69 LED POWER SUPPLY MULTI-POWER HV DIM9	2->9(10) 9(6)	☐
Dimtype: 1-10V or DALI or push button			
Cutout dimension (mm): 84			
	300 90 124 LED POWER SUPPLY MULTI-POWER DIM7	2->4(3) 3(2)	☐
Dimtype: 1-10V or push button			
Cutout dimension (mm): 55			
	300 90 125 LED POWER SUPPLY MULTI-POWER MINI DIM5	4(3) 3(2)	☐
Dimtype: DALI			
Cutout dimension (mm): 55			
	300 90 135 LED POWER SUPPLY MULTI-POWER HV	5->7 4->7 4->6	☐
Dimtype: non-dimmable			
Cutout dimension (mm): 90			

HEDRA ON 93008




22525 9310 BBR-B

	21012 0010 LED POWER SUPPLY MULTI POWER Dimtype: non-dimmable Cutout dimension (mm): 50	2->3 3	☐
	21012 0021 LED POWER SUPPLY MULTI POWER DIM1 Dimtype: 1-10V Cutout dimension (mm): 54	4 4	☐
	21012 0035 LED POWER SUPPLY MULTI POWER DIM5 Dimtype: DALI Cutout dimension (mm): 54	4 4	☐
	21012 004W LED POWER SUPPLY MULTI-POWER WDL Dimtype: WDL = wireless dimmable Cutout dimension (mm): 84	6(6) 5(5)	☐
	21012 005W LED POWER SUPPLY MULTI-POWER COMPACT WDL Dimtype: WDL = wireless dimmable Cutout dimension (mm): 54	4 4	☐
	21012 0258 LED POWER SUPPLY MULTI POWER 200-350 / 10W DIM8 Dimtype: mains (phase cut-off) Cutout dimension (mm): 50	2->2	☐
	21012 0268 LED POWER SUPPLY MULTI POWER 200-350 / 15W DIM8 Dimtype: mains (phase cut-off) Cutout dimension (mm): 50	3->3	☐
	21012 0278 LED POWER SUPPLY MULTI POWER 500-700 / 20W DIM8 Dimtype: mains (phase cut-off) Cutout dimension (mm): 55	2->2	☐
	21012 0288 LED POWER SUPPLY MULTI POWER 500-700 / 36W DIM8 Dimtype: mains (phase cut-off) Cutout dimension (mm): 55	3->4	☐
	21012 0298 LED POWER SUPPLY MULTI POWER 250-900 / 20W DIM8 Dimtype: mains (phase cut-off) Cutout dimension (mm): 48	3 3	☐



DELTALIGHT

HEDRA ON 93008

22525 9310 BBR-B

	21012 0480 LED POWER SUPPLY 350mA-DC / 17W IP68	4(3)	☐
Dimtype: non-dimmable			
Cutout dimension (mm): 60			
	21012 0500 LED POWER SUPPLY 500mA-DC / 24W IP68	4(2)	☐
Dimtype: non-dimmable			
Cutout dimension (mm): 60			
	21032 0295 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5	3	☐
Dimtype: DALI			
Cutout dimension (mm): 30			
	21032 0305 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM5	3	☐
Dimtype: DALI			
Cutout dimension (mm): 30			

Coversets


	204 00 90 ANO COVERSET R 90 ANO	☐
	204 00 90 B COVERSET R 90 B	☐
	204 00 90 W COVERSET R 90 W	☐
	204 00 100 ANO COVERSET R 100 ANO	☐
	204 00 100 B COVERSET R 100 B	☐
	204 00 100 W COVERSET R 100 W	☐

DELTALIGHT


HEDRA ON 93008

22525 9310 BBR-B

Light altering devices




473 03 01 B VIZIR HONEYCOMB B

☐

473 03 04 VIZIR SOFTENING LENS

☐

Finish your product



473 01 00 B VIZIR TUBE B

☐

473 01 00 FBR VIZIR TUBE FBR

☐

473 01 00 FG VIZIR TUBE FG

☐

473 01 00 W VIZIR TUBE W

☐

Notes: