


HELI 1 SCREEN & X SCREEN

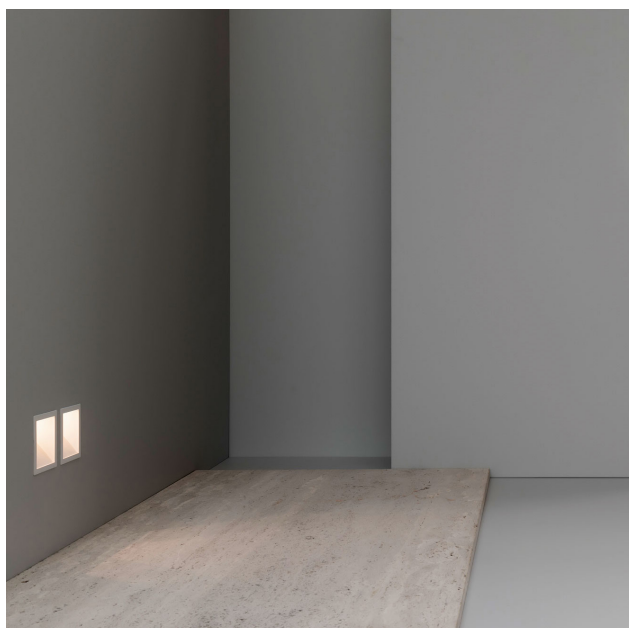

As a small wall recessed luminaire, Heli is perfect as a guidance light. Be it in a corridor or as a safety light for the steps of your stairs at night, Heli does the trick.

Specification	MK	PK / CB	NA
Wall Cut-out (Interior):	4 3/4" diameter	3 5/16" x 3 5/16"	2 15/16" x 2 15/16"
Wall Thickness (Interior):	1/2" or 5/8" drywall	Any	
Wall Cut-out (Exterior):		3 1/8" x 3 3/4"	2 15/16" x 3 7/16"
Wall Thickness (Exterior):		2 3/4"	
Adjustability:	Fixed		
Rating:	Damp -or- Wet		

Performance	Interior	Exterior
CRI / TM-30 (3000K):	80 / Rf: 86 / Rg: 95	90 / Rf: 92 / Rg: 99
SDCM:	3	
LED Maintenance:	L90B10>150,000h	
*Standard Power:	1.2W	
Remote Power Supply Capacity (# luminaires):	D1-UNV min4-max15 D8-120 min3-max9	

Delivered Lumens	3000K	
Heli:	44	20

Listing

ETL certified to US and Canadian safety standards.

Warranty

5-year limited warranty.

Ordering

ALL BOXES MUST BE FILLED IN TO CORRECTLY ORDER

Example: HLI-SP30FXO-W-CBRMTD8-120

Luminaire	Power*	CCT	Function	Style	Finish	Installation	Application	Controls***
HLI HELI	SP Standard Power	30 3000K	FI Fixed, Interior use (HELI 1 SCREEN)	O Open	A Alu Grey W White	MK Mud kit into 1/2" or 5/8" drywall PK Plate for stucco, concrete, or brick with plaster (any thickness) NA No optional accessory	RMT ¹ Remote Power Supply	D1-UNV 0-10V dim 120-277V D1-347 0-10V dim 347V D8-120 FE ELV dim 120V
			FX Fixed, Exterior use (HELI X SCREEN)	O Open	A Alu Grey N Anthracite	CB Enclosed box for concrete NA No optional accessory		

¹ Remote power supply capacity noted in table above.
*** Contact factory for Dali, DMX, or other dimming options.

Related Products

Inlet (step light), Logic Mini, LEDS C, LEDS Go



Finish Options

HELI INTERIOR (1 SCREEN)




HELI EXTERIOR (X SCREEN)




Photometric Data

HELI INTERIOR



HELI EXTERIOR






Installation Options

REMOTE DRIVER (With Controls D8)

A: 8" x B: 2"-1/2 x C: 2"-1/2
A: 203mm x B: 64mm x C: 64mm


- For Remote application
- ETL Listed
- Damp rated




REMOTE DRIVER (With Controls D1)

A: 8" x B: 2"-3/16 x C: 4"-1/4
A: 203mm x B: 72mm x C: 108mm


- For Remote application
- ETL Listed
- Damp rated




MK - MOUNTING KIT 75



PK - PLASTERKIT 186



CB - CONCRETE BOX 187



Driver Options

D1

- Dimming Control 0-10V
- Dimming Range 1-100%
- Dim to off yes at 0.7mA
- Power Factor @ Full Load >0.9
- Efficiency @ Full Load ≥87
- THD @ Full Load <20%
- Title 24 Compliant

Dimmer Compatibility

- Leviton IP710-DLZ
- Lutron DDTV-XX
- WattStopper ADF-120277
- Synergy Lighting Controls ISD BC

D8

- Dimming Control Phase Control
- Dimming Range 10-100%
- Dim to off no
- Power Factor @ Full Load >0.9
- Efficiency @ Full Load ≥78
- THD @ Full Load <12%

Dimmer Compatibility

- Leviton IPE04-1LZ
- Lutron DVELV-300P

As technology changes, please use information above as guidance. For most recent updated information please contact factory. Specifications subject to change without notice.