




LOGIC 190 R OK LINEAR V 940 DIM5

30218 9405 INOX

AVAILABLE IN
INOX 30218 9405 INOX

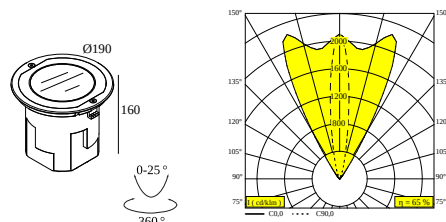

[View on website](#)



General info	
LOCATION	outdoor
INSTALLATION	Floor Recessed
CUTOUT SHAPE/SIZE (MM)	round - BOX
RECESSED DEPTH (MM)	190
INGRESS PROTECTION	IP67
PROTECTION AGAINST MECHANICAL IMPACT	IK10
WEIGHT (KG)	2
ADJUSTABILITY	0° to 25° swiveling
INFORMATION	9 x LENS SP-14° INCL.DIMMABLE LED POWER SUPPLY 500mA-DC INCL.LINEAR SPREAD LENS VERTICAL Oval spread 60°-15° INCL.1 x CABLE H07 RN-F 5 x 1mm ² 0,5m INCL.IP68 CONNECTOR 5P ESG 10mm max.500kg
Electrical info	
ELECTRICAL	110-240V / 50-60Hz
CLASS	I
POWER SUPPLY	YES
DIM TYPE	DALI
ENERGY CLASS	E
CERTIFICATES	CB, ENEC, EPD, RCM
Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED cluster 12,6W / CRI>90 (R9: 64) / 4000K / 1732lm
TM-30 VALUES	Rf: 91 / Rg: 100
SDCM	SDCM3
RISKGROUPE	RG2
LM80	L80 > 150000
BEAMANGLE	14°
LED TECHNICS (LIGHT SOURCE)	1732lm // 12,6W // 137lm/W
LED TECHNICS (LUMINAIRE)	1124lm // 14,5W // 78lm/W

Requirements

LOGIC 190 R BOX

Options

LOGIC 190 ANTI VANDAL SCREWS 2 PCS

DELTALIGHT


LOGIC 190 R OK LINEAR V 940 DIM5

30218 9405 INOX

For detailed installation instructions, please consult the manual : [30218_XXX5_HAND.pdf](#)

FINISH YOUR SPECIFICATION

Ground mounting boxes



30210 0010 LOGIC 190 R BOX

☐

Cutout dimension (mm): 300 x 230

Waterproof connection parts



21034 0150 IP68 Y-CONNECTOR 5P

☐

Other



30210 0020 LOGIC 190 ANTI VANDAL SCREWS 2 PCS

☐

Notes: