




ENTERO SQ-L IP TW 96530

28523 9020 B

AVAILABLE IN
BLACK 28523 9020 B
FULL WHITE 28523 9020 FW
GOLD COLOURED 28523 9020 GC

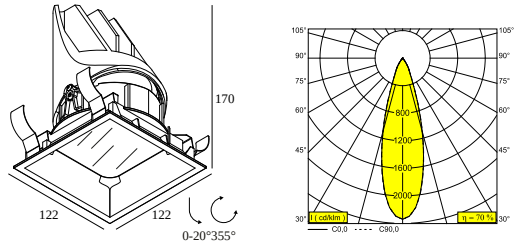

 [View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Ceiling Recessed
CUTOUT SHAPE/SIZE (MM)	square - 112 x 112
RECESSED DEPTH (MM)	180
THICKNESS OF MOUNTING SURFACE (MM)	12,5 or 25
INGRESS PROTECTION	IP44/20
WEIGHT (KG)	0.69
ADJUSTABILITY	0° to 20° swiveling, 355° rotatable
INFORMATION	REFLECTOR FL-30° EXCL.LED POWER SUPPLY 500mA-DC TW - (DALI DT8)

Electrical info	
CLASS	III
DIM TYPE	depending on power supply
ENERGY CLASS	E
CERTIFICATES	CB, ENEC, EPD

Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 17,8W / CRI>90 (R9: 50) / 2700K-6500K / 2054lm
TM-30 VALUES	rf: 89 / Rg: 100
SDCM	SDCM2
RISKGROUP	RG1
LM80	L90B10 > 50000
BEAMANGLE	30°
LED TECHNICS (LIGHT SOURCE)	2054lm // 17,8W // 116lm/W
LED TECHNICS (LUMINAIRE)	1447lm // 20,5W // 71lm/W

Requirements
LED POWER SUPPLY 500mA-DC TW


For detailed installation instructions, please consult the manual : [28523_XXX0_HAND.pdf](#)

CEILING COMPATIBILITY

Ceiling Type	Mounting Kit
 System ceiling	-
 Plasterboard	-
 Stucanet	-
 Wood	-
 Stretched ceiling	-

FINISH YOUR SPECIFICATION

LED power supplies	# of Fixtures
 # of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the ' ' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.	Min current Max current

	21012 0355 LED POWER SUPPLY 500mA-DC 2CH TW DIM5 Dimtype: DALI Cutout dimension (mm): 85	1 ☐
--	---	----------------------------

Notes: