

DELTALIGHT

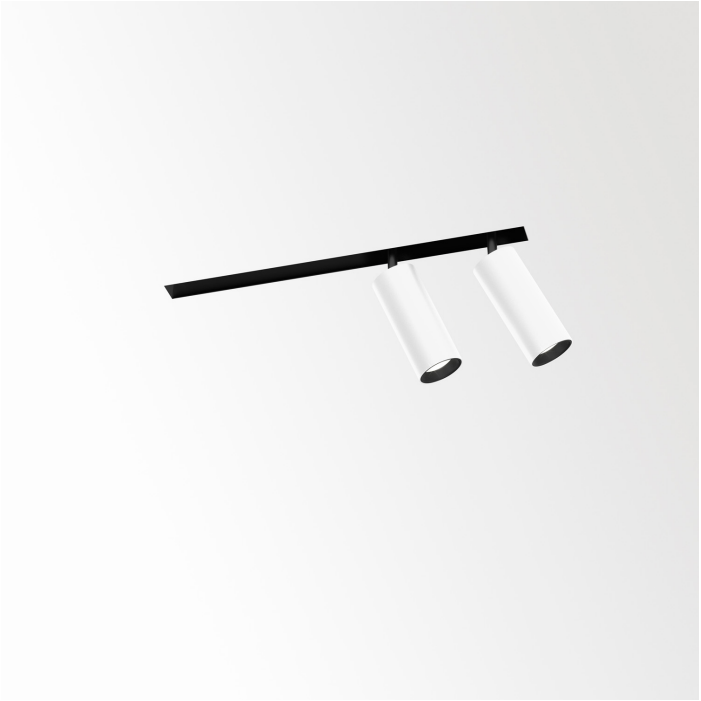


SPM20 - SPY 392 AIR SOFT 93040

REFERENCE 29816 9030 W

AVAILABLE IN
BLACK 29816 9030 B
FLEMISH BRONZE 29816 9030 FBR
FLEMISH GOLD 29816 9030 FG
GOLD COLOURED 29816 9030 GC
WHITE 29816 9030 W





View on website

General info	
LOCATION	indoor
INSTALLATION	Ceiling Recessed
CUTOUT SHAPE/SIZE (MM)	rectangle - KIT
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.5
ADJUSTABILITY	0° to 85° swiveling, 355° rotatable
INFORMATION	REFLECTOR WFL-40° EXCL.DIMMABLE LED POWER SUPPLY 350mA-DC

Electrical info	
CLASS	III
DIM TYPE	depending on power supply
ENERGY CLASS	F

Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	2 x (LED array 6W / CRI>90 (R9: 50) / 3000K-1800K / 623lm)
TM-30 VALUES	Rf: 90 / Rg: 99
SDCM	SDCM2
RISKGROUP	RG1
LM80	L90B10 > 50000
BEAMANGLE	40°
LED TECHNICS (LIGHT SOURCE)	1246lm // 12W // 105lm/W
LED TECHNICS (LUMINAIRE)	1010lm // 13,8W // 73lm/W

Requirements

SPM20 - AIR KIT 1
SPY 39 TUBE
LED POWER SUPPLY 350mA-DC DIM

For detailed installation instructions, please consult the manual : **29816_XXX0_HAND.pdf**


DELTALIGHT

SPM20 - SPY 392 AIR SOFT 93040

29816 9030 W

FINISH YOUR SPECIFICATION

Emergency units



21032 0270 B EMERGENCY UNIT 7W / 1h + LED INDICATOR HOLDER B ☐

Cutout dimension (mm): 27


21032 0270 W EMERGENCY UNIT 7W / 1h + LED INDICATOR HOLDER W ☐

LED power supplies

of Fixtures

ⓘ # of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.


Min current | Max current



300 48 350 ED1 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM1 1 ☐

Dimtype: 1-10V


Cutout dimension (mm): 30



300 48 350 ED5 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5 1 ☐

Dimtype: DALI


Cutout dimension (mm): 45



300 48 350 MDL LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W MDL 1 ☐

Dimtype: non-dimmable


Cutout dimension (mm): 30



300 48 350 WDL LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W WDL 1 ☐

Dimtype: WDL = wireless dimmable


Cutout dimension (mm): 45



300 90 61 LED POWER SUPPLY MULTI-POWER DIM6 1 ☐

Dimtype: mains (phase cut-off) or push button

Cutout dimension (mm): 56




300 90 63 LED POWER SUPPLY MULTI-POWER DIM9 2(2) ☐

Dimtype: 1-10V or DALI or push button

Cutout dimension (mm): 82

SPM20 - SPY 392 AIR SOFT 93040


29816 9030 W



300 90 64 LED POWER SUPPLY MULTI-POWER DIM7 1(1)


Dimtype: 1-10V or push button

Cutout dimension (mm): 72



300 90 67 LED POWER CONVERTER 24V-DC TO MULTI CURRENT 48W DIM9 1


Dimtype: 1-10V or DALI or push button



300 90 68 LED POWER SUPPLY MULTI-POWER DIM5 1(1)

Dimtype: DALI


Cutout dimension (mm): 72



300 90 69 LED POWER SUPPLY MULTI-POWER HV DIM9 3(3)

Dimtype: 1-10V or DALI or push button


Cutout dimension (mm): 84



300 90 124 LED POWER SUPPLY MULTI-POWER DIM7 1(1)

Dimtype: 1-10V or push button


Cutout dimension (mm): 55



300 90 125 LED POWER SUPPLY MULTI-POWER MINI DIM5 1(1)

Dimtype: DALI


Cutout dimension (mm): 55



21012 0021 LED POWER SUPPLY MULTI POWER DIM1 1

Dimtype: 1-10V


Cutout dimension (mm): 54



21012 0035 LED POWER SUPPLY MULTI POWER DIM5 1

Dimtype: DALI


Cutout dimension (mm): 54



21012 004W LED POWER SUPPLY MULTI-POWER WDL 2(2)

Dimtype: WDL = wireless dimmable

Cutout dimension (mm): 84



21012 005W LED POWER SUPPLY MULTI-POWER COMPACT WDL 1


Dimtype: WDL = wireless dimmable

Cutout dimension (mm): 54

DELTALIGHT

SPM20 - SPY 392 AIR SOFT 93040


29816 9030 W



21012 0268 LED POWER SUPPLY MULTI POWER 200-350 / 15W DIM8 — 1

Dimtype: mains (phase cut-off)


Cutout dimension (mm): 50



21012 0298 LED POWER SUPPLY MULTI POWER 250-900 / 20W DIM8 — 1

Dimtype: mains (phase cut-off)


Cutout dimension (mm): 48



21012 0308 LED POWER SUPPLY 350mA / 7,35W DIM8 — 1/2

Dimtype: mains (phase cut-off)

Cutout dimension (mm): 40



21032 0295 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5 — 1

Dimtype: DALI

Cutout dimension (mm): 30

Notes: