




D-LINER 30 INF LOC2 1390 93058 RD

REFERENCE 32086 9320 B-B

AVAILABLE IN  
BLACK-BLACK 32086 9320 B-B  
WHITE-WHITE 32086 9320 W-W

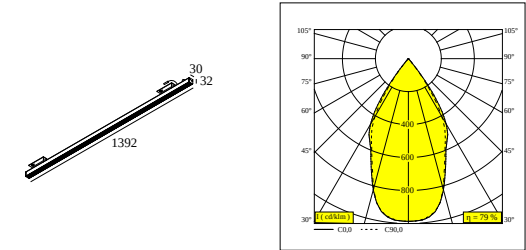

 [View on website](#)



|                                   |                                                                                                                                |
|-----------------------------------|--------------------------------------------------------------------------------------------------------------------------------|
| General info                      |                                                                                                                                |
| LOCATION                          | indoor                                                                                                                         |
| INSTALLATION                      | Ceiling Recessed                                                                                                               |
| INGRESS PROTECTION                | IP20                                                                                                                           |
| WEIGHT (KG)                       | 0                                                                                                                              |
| ADJUSTABILITY                     | non adjustable                                                                                                                 |
| INFORMATION                       | 60 x REFLECTOR FL-58°<br>EXCL.LED POWER SUPPLY 650mA-DC<br>INCL.1 x CABLE 2 x 0,75mm² - 0,5m + WIELAND PLUG GST08i2 male green |
| Electrical info                   |                                                                                                                                |
| CLASS                             | III                                                                                                                            |
| ENERGY CLASS                      | C                                                                                                                              |
| CERTIFICATES                      | EPD                                                                                                                            |
| Lightsource info                  |                                                                                                                                |
| LIGHTSOURCE NAME                  | LED                                                                                                                            |
| LIGHTSOURCE                       | LED cluster 21,6W / CRI>90 / 3000K / 3822lm                                                                                    |
| LED TECHNICS (LIGHT SOURCE)       | 3822lm // 21,6W // 177lm/W                                                                                                     |
| LED TECHNICS (LUMINAIRE)          | 3023lm // 24,8W // 122lm/W                                                                                                     |
| Requirements                      |                                                                                                                                |
| LED POWER SUPPLY SET LOC PARALLEL |                                                                                                                                |
| Options                           |                                                                                                                                |
| CONNECTING CABLE LOC PARALLEL     |                                                                                                                                |

For detailed installation instructions, please consult the manual : [32086\\_XXX0\\_HAND.pdf](#)

# DELTALIGHT

## D-LINER 30 INF LOC2 1390 93058 RD

32086 9320 B-B

### CEILING COMPATIBILITY

Ceiling Type

Mounting Kit



Acoustic climate-control ceiling Hunter Douglas 30BD


### FINISH YOUR SPECIFICATION

#### Emergency units

# of Fixtures

**i** # of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current



**32010 0195** EMERGENCY UNIT 1h LOC PARALLEL DIM5

Dimtype: DALI

1

#### Current supply



**32010 1200** T CONNECTOR LOC PARALLEL



**32010 1310** CONNECTING CABLE LOC PARALLEL 1m



**32010 1320** CONNECTING CABLE LOC PARALLEL 2m



**32010 1330** CONNECTING CABLE LOC PARALLEL 3m



**32010 1340** CONNECTING CABLE LOC PARALLEL 4m

# DELTALIGHT

## D-LINER 30 INF LOC2 1390 93058 RD

32086 9320 B-B



**32010 1350** CONNECTING CABLE LOC PARALLEL 5m


☐

### LED power supplies

### # of Fixtures

 # of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.


Min current | Max current



**32010 0115** LED POWER SUPPLY SET LOC PARALLEL 650mA / 35W DIM5

1 ☐


Dimtype: DALI



**32010 0165** LED POWER SUPPLY SET LOC PARALLEL 1300mA /100W DIM5

2->2 ☐

Dimtype: DALI



**32010 0445** LED POWER SUPPLY SET LOC PARALLEL 1950mA /100W DIM5

3->3 ☐

Dimtype: DALI

Notes: