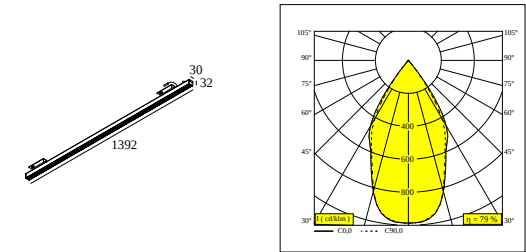




D-LINER 30 INF LOC2 1390 93058 RD

32086 9320 W-W

AVAILABLE IN
BLACK-BLACK 32086 9320 B-B
WHITE-WHITE 32086 9320 W-W



 [View on website](#)




General info	
LOCATION	indoor
INSTALLATION	Ceiling Recessed
INGRESS PROTECTION	IP20
WEIGHT (KG)	0
ADJUSTABILITY	non adjustable
INFORMATION	60 x REFLECTOR FL-58° EXCL.LED POWER SUPPLY 650mA-DC INCL.1 x CABLE 2 x 0,75mm² - 0,5m + WIELAND PLUG GST08i2 male green
Electrical info	
CLASS	III
ENERGY CLASS	C
Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED cluster 21,6W / CRI>90 / 3000K / 3822lm
LED TECHNICS (LIGHT SOURCE)	3822lm // 21,6W // 177lm/W
LED TECHNICS (LUMINAIRE)	3023lm // 24,8W // 122lm/W
Requirements	
LED POWER SUPPLY SET LOC PARALLEL	
Options	
CONNECTING CABLE LOC PARALLEL	

For detailed installation instructions, please consult the manual : [32086_XXX0_HAND.pdf](#)

CEILING COMPATIBILITY




Ceiling Type	Mounting Kit
	Acoustic climate-control ceiling Hunter Douglas 30BD

FINISH YOUR SPECIFICATION

Emergency units		# of Fixtures
 # of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the ' ' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.		Min current Max current
 32010 0195 EMERGENCY UNIT 1h LOC PARALLEL DIM5		1
Dimtype: DALI		
Current supply		
 32010 1200 T CONNECTOR LOC PARALLEL		
 32010 1310 CONNECTING CABLE LOC PARALLEL 1m		
 32010 1320 CONNECTING CABLE LOC PARALLEL 2m		
 32010 1330 CONNECTING CABLE LOC PARALLEL 3m		
 32010 1340 CONNECTING CABLE LOC PARALLEL 4m		
 32010 1350 CONNECTING CABLE LOC PARALLEL 5m		

D-LINER 30 INF LOC2 1390 93058 RD

32086 9320 W-W

LED power supplies		# of Fixtures
 # of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the ' ' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.		Min current Max current
 32010 0115 LED POWER SUPPLY SET LOC PARALLEL 650mA / 35W DIM5 Dimtype: DALI	1	
 32010 0165 LED POWER SUPPLY SET LOC PARALLEL 1300mA / 100W DIM5 Dimtype: DALI	2->2	
 32010 0445 LED POWER SUPPLY SET LOC PARALLEL 1950mA / 100W DIM5 Dimtype: DALI	3->3	

Notes: