




LOGIC 190 R HONEYCOMB 92747

30212 9230 INOX

AVAILABLE IN
INOX 30212 9230 INOX

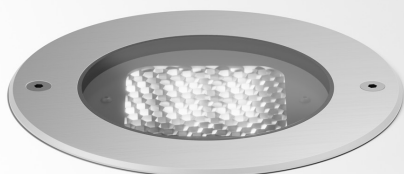

[View on website](#)



General info

LOCATION	outdoor
INSTALLATION	Floor Recessed
CUTOUT SHAPE/SIZE (MM)	round - BOX
RECESSED DEPTH (MM)	190
INGRESS PROTECTION	IP67
PROTECTION AGAINST MECHANICAL IMPACT	IK10
WEIGHT (KG)	2
ADJUSTABILITY	non adjustable
INFORMATION	9 x LENS SP-14° INCL.LED POWER SUPPLY 500mA-DC INCL.BEAM LENS 47° INCL.HONEYCOMB INCL.1 x CABLE H05 RN-F 3 x 0.75mm ² 0,5m INCL.IP68 CONNECTOR 3P ESG 10mm max.500kg

Electrical info

ELECTRICAL	220-240V / 50-60Hz
CLASS	I
POWER SUPPLY	YES
DIM TYPE	non-dimmable
ENERGY CLASS	F
CERTIFICATES	CB, ENEC, EPD, RCM

Lightsource info

LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED cluster 12,6W / CRI>90 (R9: 55) / 2700K / 1466lm
TM-30 VALUES	Rf: 91 / Rg: 100
SDCM	SDCM3
RISKGROUPE	RG2
LM80	L80 > 150000
BEAMANGLE	47°
LED TECHNICS (LIGHT SOURCE)	1466lm // 12,6W // 116lm/W
LED TECHNICS (LUMINAIRE)	712lm // 14,5W // 49lm/W

Requirements

LOGIC 190 R BOX

Options

LOGIC 190 ANTI VANDAL SCREWS 2 PCS

DELTALIGHT


LOGIC 190 R HONEYCOMB 92747

30212 9230 INOX

For detailed installation instructions, please consult the manual : [30212_XXX0_HAND.pdf](#)

FINISH YOUR SPECIFICATION

Ground mounting boxes




30210 0010 LOGIC 190 R BOX


☐

Cutout dimension (mm): 300 x 230

Waterproof connection parts




431 99 02 IP68 JUNCTION BOX 4P

☐

21034 0150 IP68 Y-CONNECTOR 5P

☐

Other



30210 0020 LOGIC 190 ANTI VANDAL SCREWS 2 PCS

☐

Notes: