




M52 - 1 LED 82720 DIM5
24414 8225



 [View on website](#)

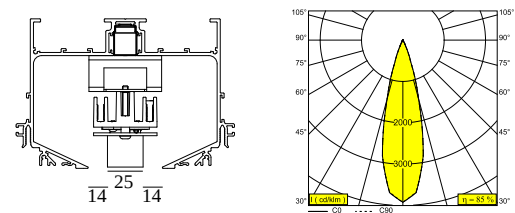

General info	
LOCATION	indoor
INSTALLATION	Low voltage systems Low voltage system mounted
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.3
ADJUSTABILITY	non adjustable
INFORMATION	LENS FL-20° EXCL.LED POWER SUPPLY 48V-DC
Electrical info	
ELECTRICAL	48V-DC
CLASS	III
DIM TYPE	DALI
ENERGY CLASS	F
CERTIFICATES	CB, ENEC
Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 6W / CRI>80 / 2700K / 558lm
SDCM	SDCM2
BEAMANGLE	20°
LED TECHNICS (LIGHT SOURCE)	558lm // 6W // 94lm/W
LED TECHNICS (LUMINAIRE)	474lm // 6,9W // 69lm/W
Requirements	
LED POWER SUPPLY 48V-DC	

For detailed installation instructions, please consult the manual : [24414_8X25_HAND.pdf](#)

DELTALIGHT

M52 - 1 LED 82720 DIM5

24414 8225

FINISH YOUR SPECIFICATION

LED power supplies

of Fixtures



of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current




300 89 48 90 LED POWER SUPPLY 48V-DC / 90W

12

Dimtype: non-dimmable


Cutout dimension (mm): 75



300 89 48 100 LED POWER SUPPLY 48V-DC / 100W DIN

14

Dimtype: non-dimmable



300 89 48 150 LED POWER SUPPLY 48V-DC / 150W

20

Dimtype: non-dimmable



300 89 48 240 LED POWER SUPPLY 48V-DC / 240W DIN

34

Dimtype: non-dimmable




21012 0230 LED POWER SUPPLY 48V-DC / 100W

14

Dimtype: non-dimmable

Cutout dimension (mm): 40



21012 0240 LED POWER SUPPLY 48V-DC / 200W

29


Dimtype: non-dimmable

Cutout dimension (mm): 40

COMPATIBLE COMPOSABLES

SPLITLINE M52 profile

Available Colours






420 52 10 00 SPM52 - PROFILE 1m



DELTALIGHT

M52 - 1 LED 82720 DIM5

24414 8225

	420 52 20 00 SPM52 - PROFILE 2m	
	420 52 30 00 SPM52 - PROFILE 3m	
	24413 0000 SPM52 - PROFILE	

Notes: