




LOGIC 190 R HONEYCOMB 93014

30212 9310 INOX

AVAILABLE IN  
INOX 30212 9310 INOX

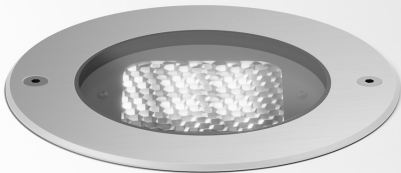

 [View on website](#)




| General info                         |                                                                                                                                                                 |
|--------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| LOCATION                             | outdoor                                                                                                                                                         |
| INSTALLATION                         | Floor Recessed                                                                                                                                                  |
| CUTOUT SHAPE/SIZE (MM)               | round - BOX                                                                                                                                                     |
| RECESSED DEPTH (MM)                  | 190                                                                                                                                                             |
| INGRESS PROTECTION                   | IP67                                                                                                                                                            |
| PROTECTION AGAINST MECHANICAL IMPACT | IK10                                                                                                                                                            |
| WEIGHT (KG)                          | 2                                                                                                                                                               |
| ADJUSTABILITY                        | non adjustable                                                                                                                                                  |
| INFORMATION                          | 9 x LENS SP-14°<br>INCL.LED POWER SUPPLY 500mA-DC<br>INCL.HONEYCOMB<br>INCL.1 x CABLE H05 RN-F 3 x 0.75mm² 0,5m<br>INCL.IP68 CONNECTOR 3P<br>ESG 10mm max.500kg |
| Electrical info                      |                                                                                                                                                                 |
| ELECTRICAL                           | 220-240V / 50-60Hz                                                                                                                                              |
| CLASS                                | I                                                                                                                                                               |
| POWER SUPPLY                         | YES                                                                                                                                                             |
| DIM TYPE                             | non-dimmable                                                                                                                                                    |
| ENERGY CLASS                         | E                                                                                                                                                               |
| CERTIFICATES                         | CB, ENEC, EPD, RCM                                                                                                                                              |
| Lightsource info                     |                                                                                                                                                                 |
| LIGHTSOURCE NAME                     | LED                                                                                                                                                             |
| LIGHTSOURCE                          | LED cluster 12,6W / CRI>90 (R9: 60) / 3000K / 1604lm                                                                                                            |
| TM-30 VALUES                         | Rf: 92 / Rg: 99                                                                                                                                                 |
| SDCM                                 | SDCM3                                                                                                                                                           |
| RISKGROUP                            | RG2                                                                                                                                                             |
| LM80                                 | L80 > 150000                                                                                                                                                    |
| BEAMANGLE                            | 14°                                                                                                                                                             |
| LED TECHNICS (LIGHT SOURCE)          | 1604lm // 12,6W // 126lm/W                                                                                                                                      |
| LED TECHNICS (LUMINAIRE)             | 947lm // 14,5W // 65lm/W                                                                                                                                        |

| Requirements                       |  |
|------------------------------------|--|
| LOGIC 190 R BOX                    |  |
| Options                            |  |
| LOGIC 190 ANTI VANDAL SCREWS 2 PCS |  |

For detailed installation instructions, please consult the manual : [30212\\_XXX0\\_HAND.pdf](#)

FINISH YOUR SPECIFICATION

Ground mounting boxes



**30210 0010** LOGIC 190 R BOX

☐

Cutout dimension (mm): 300 x 230

Waterproof connection parts



**431 99 02** IP68 JUNCTION BOX 4P

☐

**21034 0150** IP68 Y-CONNECTOR 5P

☐

Other



**30210 0020** LOGIC 190 ANTI VANDAL SCREWS 2 PCS

☐

Notes: