



COMPO M IP44 94020

REFERENCE

9 15751 9420 B


AVAILABLE IN

NOIR 9 15751 9420 B

CHROME 9 15751 9420 C

CHROME FONCÉ 9 15751 9420 DC

BLANC 9 15751 9420 W

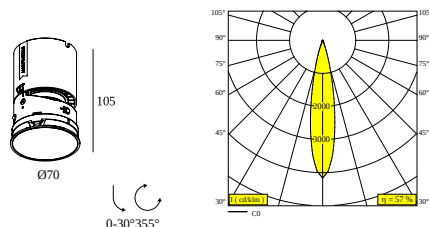

[View on website](#)



General info

LOCATION	interieur-exterieur
INSTALLATION	Plafond Encastré
CUTOUT SHAPE/SIZE (MM)	circulaire - 110
RECESSED DEPTH (MM)	105
THICKNESS OF MOUNTING SURFACE (MM)	max.25
INGRESS PROTECTION	IP44/20
WEIGHT (KG)	0.27
ADJUSTABILITY	0° à 30° inclinable, 355° rotatif

Electrical info

CLASS	III
DIM TYPE	selon le type d'alimentation externe
ENERGY CLASS	F

Lightsource info

LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 12,5W / CRI>90 (R9: 79) / 4000K / 1457lm
RVALUES	Rf: 90 / Rg: 99
SDMC	SDCM1
RISKGROUP	RG1
LM80	L90B10 > 50000
BEAMANGLE	20°
LED TECHNICS (LIGHT SOURCE)	1457lm // 12,5W // 117lm/W
LED TECHNICS (LUMINAIRE)	836lm // 14,4W // 58lm/W

Requirements

LED POWER SUPPLY 700 mA - DC

Accessories

COMPO M HONEYCOMB SINGLE USE B

COMPO M LINEAR SPREAD LENS

COMPO M SPREAD LENS

COMPO M SOFTENING LENS

COMPO M GLASS SBL

For detailed installation instructions, please consult the manual : [9_15751_XXX0_HAND.pdf](#)

DELTALIGHT

COMPO M IP44 94020

9 15751 9420 B

CEILING COMPATIBILITY

Ceiling Type	Mounting Kit	
	 15710 0020 - MOUNTING KIT COMPO M TRIM	Required
	 15710 0050 - MOUNTING KIT COMPO M TRIMLESS	Required
	 15710 0020 - MOUNTING KIT COMPO M TRIM	Required
	 15710 0050 - MOUNTING KIT COMPO M TRIMLESS	Required
	 15710 0020 - MOUNTING KIT COMPO M TRIM	Required
	 15710 0050 - MOUNTING KIT COMPO M TRIMLESS	Required

FINISH YOUR SPECIFICATION

alimentation led		# of Fixtures
 web2print_power_supply_info_box		Min current Max current
15710 3100	LED POWER SUPPLY 18W NO DIM 1400mA	1->4 ☐
15710 3500	LED POWER SUPPLY MULTIPOWER 15W NO DIM 700mA	1 ☐
15710 4000	LED POWER SUPPLY MULTIPOWER 15W DIM8 700mA	1 ☐
15710 4900	LED POWER SUPPLY MULTIPOWER 20W DIM1 700mA	1 ☐
15710 5000	LED POWER SUPPLY MULTIPOWER 55W DALI DT6 1400mA	1->13 ☐
Dimtype: DALI		
15710 5600	LED POWER SUPPLY MULTIPOWER 20W DALI DT6 700mA	1 ☐
Dimtype: DALI		

kit de montage

	15710 0020 B MOUNTING KIT COMPO M TRIM B	☐
Cutout dimension (mm): 76		
	15710 0020 W MOUNTING KIT COMPO M TRIM W	☐

COMPO M IP44 94020

9 15751 9420 B



15710 0050 MOUNTING KIT COMPO M TRIMLESS

☐

Cutout dimension (mm): 76

modifier les dispositifs de lumière

15710 1100 B COMPO M HONEYCOMB SINGLE USE B

☐

15710 1110 COMPO M LINEAR SPREAD LENS

☐

Cutout dimension (mm): 32,5

15710 1120 COMPO M SPREAD LENS

☐

Cutout dimension (mm): 32,5

15710 1130 COMPO M SOFTENING LENS

☐

Cutout dimension (mm): 32,5

15710 1140 COMPO M GLASS SBL

☐

Cutout dimension (mm): 32,5

Notes: