




SOLI - 52 NLT 982745 MDL
27113 7230 GC

AVAILABLE IN
BLACK 27113 7230 B
GOLD COLOURED 27113 7230 GC
WHITE 27113 7230 W

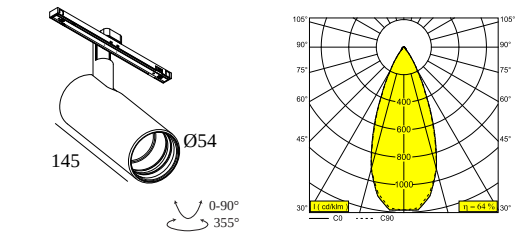

 [View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Low voltage systems Low voltage system mounted
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.4
ADJUSTABILITY	0° to 90° swiveling, 360° rotatable
INFORMATION	REFLECTOR WFL-45° EXCL.LED POWER SUPPLY 48V-DC NLT = Natural Light Technology Optional REFLECTORS 20° & 30° available
Electrical info	
ELECTRICAL	48V-DC
CLASS	III
DIM TYPE	MDL = 1-10V or DALI or push button
ENERGY CLASS	F
CERTIFICATES	CB, ENEC, LCA
Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 6,1-10,7W / CRI>98 (R9: 96) / 2700K / 593-967lm
TM-30 VALUES	rf: 97 / Rg: 102
SDCM	SDCM2
RISKGROUP	RG1
LM80	L90B10 > 50000
BEAMANGLE	45°
LED TECHNICS (LIGHT SOURCE)	967lm // 10,7W // 91lm/W
LED TECHNICS (LUMINAIRE)	619lm // 12,3W // 50lm/W

Requirements
SPY 52 TUBE
LED POWER SUPPLY 48V-DC

Options
DIMMABLE MODULATOR

Accessories
HONEYCOMB 42
SPREAD LENS 42
LINEAR SPREAD LENS 42
SOFTENING LENS 42
GLASS SBL 42

For detailed installation instructions, please consult the manual : [27113_XXX0_HAND.pdf](#)

FINISH YOUR SPECIFICATION

SMART 48

of Fixtures

 # of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current



300 90 011 SMART 48 MODULATOR DIM9

15

Dimtype: 1-10V or DALI or push button



300 90 012 SMART 48 MODULATOR WD

15


Dimtype: WDL = wireless dimmable

LED power supplies

of Fixtures

 # of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current



300 89 48 100 LED POWER SUPPLY 48V-DC / 100W DIN

8

Dimtype: non-dimmable



300 89 48 240 LED POWER SUPPLY 48V-DC / 240W DIN

19

Dimtype: non-dimmable



21012 0230 LED POWER SUPPLY 48V-DC / 100W

8

Dimtype: non-dimmable

Cutout dimension (mm): 40

DELTALIGHT

SOLI - 52 NLT 982745 MDL

27113 7230 GC




21012 0240 LED POWER SUPPLY 48V-DC / 200W

16 ☐

Dimtype: non-dimmable


Cutout dimension (mm): 40

Light altering devices




19810 0010 B HONEYCOMB 42 SINGLE USE B

☐



19810 0020 LINEAR SPREAD LENS 42

☐




19810 0030 SPREAD LENS 42

☐




19810 0040 SOFTENING LENS 42

☐



19810 0050 GLASS SBL 42


☐



19810 0060 B HONEYCOMB 42 DOUBLE USE B

☐

Finish your product



19810 0100 B SPY 52 TUBE B

☐

19810 0100 FBR SPY 52 TUBE FBR

☐

DELTALIGHT

SOLI - 52 NLT 982745 MDL


27113 7230 GC

<u>19810 0100 FG</u>	SPY 52 TUBE FG	☐
<u>19810 0100 GC</u>	SPY 52 TUBE GC	☐
<u>19810 0100 W</u>	SPY 52 TUBE W	☐

Replaceable reflector / lens

	<u>19810 0180</u> SPY 52 REFLECTOR 20°	☐
	<u>19810 0190</u> SPY 52 REFLECTOR 45°	☐
	<u>19810 0240</u> SPY 52 REFLECTOR 30°	☐

COMPATIBLE COMPOSABLES

SOLISCAPE profile	Available Colours
 <u>27111 0020</u> SOLI - PROFILE 2m	 
 <u>27111 0030</u> SOLI - PROFILE 3m	 

Notes: