




M - LED LINE UP 80 FP 930
23376 9300 ANO

AVAILABLE IN
ALU ANODIZED 23376 9300 ANO

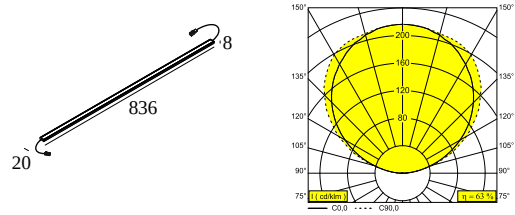

 [View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Low voltage systems Low voltage system mounted
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.15
ADJUSTABILITY	non adjustable
INFORMATION	LED FLEX FP 15W/m 1400lm/m 3000K / CRI90 EXCL.LED POWER SUPPLY 24V-DC
Electrical info	
ELECTRICAL	24V-DC
CLASS	III
DIM TYPE	depending on power supply
ENERGY CLASS	G
CERTIFICATES	CB, EAC, ENEC
Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED cluster 13W / CRI>90 / 3000K / 1160lm
LED TECHNICS (LIGHT SOURCE)	1160lm // 13W // 89lm/W
LED TECHNICS (LUMINAIRE)	727lm // 15W // 49lm/W
Requirements	
LED POWER SUPPLY 24V-DC	

For detailed installation instructions, please consult the manual : [23376_XXXX_HAND.pdf](#)

FINISH YOUR SPECIFICATION


LED power supplies

of Fixtures



of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current




300 89 24 20

LED POWER SUPPLY 24V-DC / 20W

1

Dimtype: non-dimmable

Cutout dimension (mm): 60




300 89 24 40

LED POWER SUPPLY 24V-DC / 40W

3

Dimtype: non-dimmable

Cutout dimension (mm): 55




300 89 24 60

LED POWER SUPPLY 24V-DC / 60W

4

Dimtype: non-dimmable

Cutout dimension (mm): 55




300 89 24 80 ED1

LED POWER SUPPLY 24V-DC / 80W DIM1

6

Dimtype: 1-10V

Cutout dimension (mm): 75




300 89 24 150

LED POWER SUPPLY 24V-DC / 150W

11

Dimtype: non-dimmable

Cutout dimension (mm): 75




300 90 003 ED1

24V-DC / 4A DIM1 UNIT

7

Dimtype: 1-10V

Cutout dimension (mm): 30




300 90 003 ED5

24V-DC / 4A DIM5 UNIT

7

Dimtype: DALI

Cutout dimension (mm): 30



300 90 010

24V-DC / 2 x 4A WIRELESS DIM UNIT










2 x 7

Dimtype: WDL = wireless dimmable

DELTALIGHT

M - LED LINE UP 80 FP 930




23376 9300 ANO

	300 90 61 LED POWER SUPPLY MULTI-POWER DIM6 Dimtype: mains (phase cut-off) or push button Cutout dimension (mm): 56	1	☐
	21012 0101 LED POWER SUPPLY 24V-DC / 60W IP67 DIM1 Dimtype: 1-10V Cutout dimension (mm): 65	4	☐
	21012 0111 LED POWER SUPPLY 24V-DC / 90W IP67 DIM1 Dimtype: 1-10V Cutout dimension (mm): 75	6	☐
	21012 0121 LED POWER SUPPLY 24V-DC / 120W IP67 DIM1 Dimtype: 1-10V Cutout dimension (mm): 75	9	☐
	21012 0135 LED POWER SUPPLY 24V-DC / 60W IP67 DIM5 Dimtype: DALI Cutout dimension (mm): 65	4	☐
	21012 0145 LED POWER SUPPLY 24V-DC / 90W IP67 DIM5 Dimtype: DALI Cutout dimension (mm): 75	6	☐
	21012 0155 LED POWER SUPPLY 24V-DC / 120W IP67 DIM5 Dimtype: DALI Cutout dimension (mm): 75	9	☐
	21012 0160 LED POWER SUPPLY 24V-DC / 24W Dimtype: non-dimmable Cutout dimension (mm): 55	1	☐
	21012 0171 LED POWER SUPPLY 24V-DC / 60W DIM1 Dimtype: 1-10V Cutout dimension (mm): 61	4	☐
	21012 0181 LED POWER SUPPLY 24V-DC / 90W DIM1 Dimtype: 1-10V Cutout dimension (mm): 70	6	☐

DELTALIGHT

M - LED LINE UP 80 FP 930


23376 9300 ANO

	21012 0191 LED POWER SUPPLY 24V-DC / 120W DIM1	9	☐
	Dimtype: 1-10V		
	Cutout dimension (mm): 70		
	21012 0205 LED POWER SUPPLY 24V-DC / 60W DIM5	4	☐
	Dimtype: DALI		
	Cutout dimension (mm): 61		
	21012 0225 LED POWER SUPPLY 24V-DC / 100W DIM5	7	☐
	Dimtype: DALI		
	Cutout dimension (mm): 70		

COMPATIBLE COMPOSABLES

SHIFTLINE M26H profile


Available Colours



23359 0000

SLM26H - PROFILE






23359 0010

SLM26H - PROFILE 1m






23359 0020

SLM26H - PROFILE 2m






23359 0030

SLM26H - PROFILE 3m



SHIFTLINE M44 profile

Available Colours



23374 0000


SLM44 - PROFILE




DELTALIGHT

M - LED LINE UP 80 FP 930

23376 9300 ANO



23374 0020 SLM44 - PROFILE 2m



23374 0030 SLM44 - PROFILE 3m



Notes: