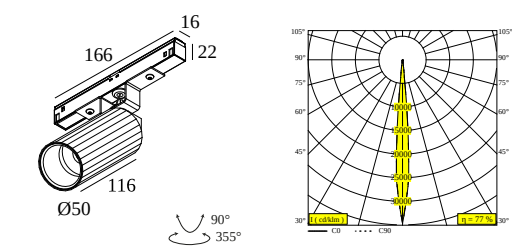




M20/M26H - HEDRA 92708 DIM5

23363 9215 GC

AVAILABLE IN
BLACK BRONZE 23363 9215 BBR
GOLD COLOURED 23363 9215 GC



 [View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Low voltage systems Low voltage system mounted
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.4
ADJUSTABILITY	0° to 90° swiveling, 355° rotatable
INFORMATION	LENS SP-8° EXCL.LED POWER SUPPLY 48V-DC

Electrical info	
ELECTRICAL	48V-DC
CLASS	III
DIM TYPE	DALI
ENERGY CLASS	F
CERTIFICATES	CB, ENEC

Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 5,7W / CRI>90 (R9: 56) / 2700K / 519lm
TM-30 VALUES	rf: 91 / Rg: 99
SDCM	SDCM2
RISKGROUP	RG2 (threshold 0,6m)
LM80	L90B10 > 41000
BEAMANGLE	8°
LED TECHNICS (LIGHT SOURCE)	519lm // 5,7W // 90lm/W
LED TECHNICS (LUMINAIRE)	397lm // 6,6W // 61lm/W

Remarks
Take a look at our MAGNETIC PROFILES movie

Requirements
VIZIR TUBE
LED POWER SUPPLY 48V-DC

Accessories
VIZIR HONEYCOMB
VIZIR SOFTENING LENS

DELTALIGHT

M20/M26H - HEDRA 92708 DIM5

23363 9215 GC

For detailed installation instructions, please consult the manual : [23363_9XX5_HAND.pdf](#)

FINISH YOUR SPECIFICATION


LED power supplies

of Fixtures



of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.


Min current | Max current



300 89 48 100 LED POWER SUPPLY 48V-DC / 100W DIN

14


Dimtype: non-dimmable



300 89 48 240 LED POWER SUPPLY 48V-DC / 240W DIN

34

Dimtype: non-dimmable




21012 0230 LED POWER SUPPLY 48V-DC / 100W

14

Dimtype: non-dimmable

Cutout dimension (mm): 40




21012 0240 LED POWER SUPPLY 48V-DC / 200W

29


Dimtype: non-dimmable

Cutout dimension (mm): 40

Light altering devices



473 03 01 B VIZIR HONEYCOMB B




473 03 04 VIZIR SOFTENING LENS

DELTALIGHT

M20/M26H - HEDRA 92708 DIM5

23363 9215 GC



Finish your product

	473 01 00 B VIZIR TUBE B	☐
	473 01 00 FBR VIZIR TUBE FBR	☐
	473 01 00 FG VIZIR TUBE FG	☐
	473 01 00 W VIZIR TUBE W	☐

COMPATIBLE COMPOSABLES

SHIFTLINE M26H + SBL





Available Colours

	30411 9205 SHIFTLINE M26H + SBL 2m DIM5	☐ ☐
	30411 9305 SHIFTLINE M26H + SBL 2m DIM5	☐ ☐
	30412 9205 SHIFTLINE M26H + SBL 3m DIM5	☐ ☐
	30412 9305 SHIFTLINE M26H + SBL 3m DIM5	☐ ☐
	30413 9205 SHIFTLINE M26H + SBL 4m DIM5	☐ ☐
	30413 9305 SHIFTLINE M26H + SBL 4m DIM5	☐ ☐



DELTALIGHT

M20/M26H - HEDRA 92708 DIM5

23363 9215 CC

SHIFTLINE M26H profile		Available Colours
	23359 0000 SLM26H - PROFILE	 
	23359 0010 SLM26H - PROFILE 1m	 
	23359 0020 SLM26H - PROFILE 2m	         
	23359 0030 SLM26H - PROFILE 3m	         



SPLITLINE M20 ST profile		Available Colours
	23397 0000 SPM20 ST - PROFILE	 
	23397 0020 SPM20 ST - PROFILE 2m	 
	23397 0030 SPM20 ST - PROFILE 3m	 

SPLITLINE M20 profile		Available Colours
	420 20 10 00 SPM20 - PROFILE 1m	
	420 20 20 00 SPM20 - PROFILE 2m	

DELTALIGHT

M20/M26H - HEDRA 92708 DIM5

23363 9215 GC

	420 20 30 00 SPM20 - PROFILE 3m	
	23301 0000 SPM20 - PROFILE B	

Notes: