




HALOSCAN ON 1 MP 92721 DIM8

REFERENCE 23147 9228 W-W

AVAILABLE IN  
**BLACK-BLACK** 23147 9228 B-B  
**BLACK-GOLD COLORED** 23147 9228 B-GC  
**WHITE-WHITE** 23147 9228 W-W

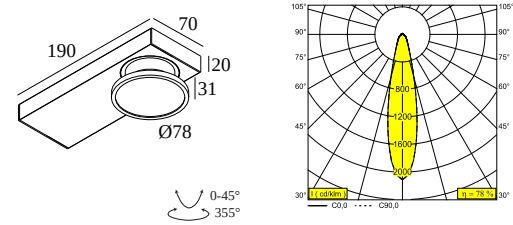

 [View on website](#)




| General info                |                                                        |
|-----------------------------|--------------------------------------------------------|
| LOCATION                    | indoor                                                 |
| INSTALLATION                | Ceiling Surface mounted                                |
| INGRESS PROTECTION          | IP20                                                   |
| WEIGHT (KG)                 | 0.5                                                    |
| ADJUSTABILITY               | 0° to 45° swiveling, 355° rotatable                    |
| INFORMATION                 | LENS FL-21°<br>INCL.DIMMABLE LED POWER SUPPLY 500mA-DC |
| Electrical info             |                                                        |
| ELECTRICAL                  | 220-240V / 50-60Hz                                     |
| CLASS                       | I                                                      |
| POWER SUPPLY                | YES                                                    |
| DIM TYPE                    | mains (phase cut-off)                                  |
| ENERGY CLASS                | D                                                      |
| CERTIFICATES                | CB, ENEC, RCM                                          |
| Lightsource info            |                                                        |
| LIGHTSOURCE NAME            | LED                                                    |
| LIGHTSOURCE                 | LED array 8,6W / CRI>90 (R9: 60) / 2700K / 1041lm      |
| TM-30 VALUES                | Rf: 89 / Rg: 100                                       |
| SDCM                        | SDCM1                                                  |
| RISKGROUP                   | RG1                                                    |
| LM80                        | L90B10 > 50000                                         |
| BEAMANGLE                   | 21°                                                    |
| LED TECHNICS (LIGHT SOURCE) | 1041lm // 8,6W // 121lm/W                              |
| LED TECHNICS (LUMINAIRE)    | 812lm // 9,9W // 82lm/W                                |
| Accessories                 |                                                        |

HALOSCAN HONEYCOMB  
HALOSCAN LINEAR SPREAD LENS  
HALOSCAN KAP MP

For detailed installation instructions, please consult the manual : [23147\\_XXX8\\_HAND.pdf](#)


FINISH YOUR SPECIFICATION

Light altering devices




**23110 0040**

HALOSCAN LINEAR SPREAD LENS

☐

**23110 0050 B**

HALOSCAN HONEYCOMB B

☐

**23110 0060 B**

HALOSCAN KAP MP B

☐

**23110 0060 W**

HALOSCAN KAP MP W

☐

Notes: