



## COMPO S IP44 92741

9 15743 9230 B


AVAILABLE IN

**NOIR** 9 15743 9230 B

**CHROME** 9 15743 9230 C

**CHROME FONCÉ** 9 15743 9230 DC

**BLANC** 9 15743 9230 W

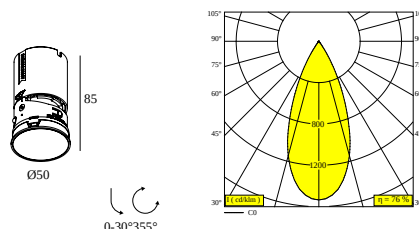

[View on website](#)



### General info

|                                           |                                   |
|-------------------------------------------|-----------------------------------|
| <b>LOCATION</b>                           | interieur-exterieur               |
| <b>INSTALLATION</b>                       | Plafond Encastré                  |
| <b>CUTOUT SHAPE/SIZE (MM)</b>             | circulaire - 90                   |
| <b>RECESSED DEPTH (MM)</b>                | 85                                |
| <b>THICKNESS OF MOUNTING SURFACE (MM)</b> | max.25                            |
| <b>INGRESS PROTECTION</b>                 | IP44/20                           |
| <b>WEIGHT (KG)</b>                        | 0.136                             |
| <b>ADJUSTABILITY</b>                      | 0° à 30° inclinable, 355° rotatif |

### Electrical info

|                     |                                      |
|---------------------|--------------------------------------|
| <b>CLASS</b>        | III                                  |
| <b>DIM TYPE</b>     | selon le type d'alimentation externe |
| <b>ENERGY CLASS</b> | F                                    |

### Lightsource info

|                                    |                                         |
|------------------------------------|-----------------------------------------|
| <b>LIGHTSOURCE NAME</b>            | LED                                     |
| <b>LIGHTSOURCE</b>                 | LED array 6,4W / CRI>90 / 2700K / 476lm |
| <b>SDMC</b>                        | SDCM2                                   |
| <b>RISKGROUP</b>                   | RG1                                     |
| <b>BEAMANGLE</b>                   | 40°                                     |
| <b>LED TECHNICS (LIGHT SOURCE)</b> | 476lm // 6,4W // 115lm/W                |
| <b>LED TECHNICS (LUMINAIRE)</b>    | 361lm // 7,4W // 49lm/W                 |

### Requirements

LED POWER SUPPLY 350 mA - DC

### Accessories

COMPO S HONEYCOMB SINGLE USE B  
COMPO S LINEAR SPREAD LENS  
COMPO S SPREAD LENS  
COMPO S SOFTENING LENS  
COMPO S GLASS SBL

For detailed installation instructions, please consult the manual : [9\\_15743\\_XXX0\\_HAND.pdf](#)

# DELTALIGHT

## COMPO S IP44 92741

9 15743 9230 B

### CEILING COMPATIBILITY

| Ceiling Type                                                                     | Mounting Kit                                                                                                                 |          |
|----------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------|----------|
|  |  15710 0010 - MOUNTING KIT COMPO S TRIM     | Required |
|                                                                                  |  15710 0040 - MOUNTING KIT COMPO S TRIMLESS | Required |
|  |  15710 0010 - MOUNTING KIT COMPO S TRIM     | Required |
|                                                                                  |  15710 0040 - MOUNTING KIT COMPO S TRIMLESS | Required |
|  |  15710 0010 - MOUNTING KIT COMPO S TRIM     | Required |
|                                                                                  |  15710 0040 - MOUNTING KIT COMPO S TRIMLESS | Required |

### FINISH YOUR SPECIFICATION

| alimentation led                                                                                                    | # of Fixtures                  |
|---------------------------------------------------------------------------------------------------------------------|--------------------------------|
|  web2print_power_supply_info_box | Min current   Max current      |
| <b>15710 3100</b> LED POWER SUPPLY 18W NO DIM 1400mA                                                                | 1->4 <input type="checkbox"/>  |
| <b>15710 3300</b> LED POWER SUPPLY MULTIPOWER 15W NO DIM 350mA                                                      | 1->2 <input type="checkbox"/>  |
| <b>15710 3800</b> LED POWER SUPPLY MULTIPOWER 10W DIM8 350mA                                                        | 1 <input type="checkbox"/>     |
| <b>15710 4500</b> LED POWER SUPPLY MULTIPOWER 12W DIM1 350mA                                                        | 1 <input type="checkbox"/>     |
| <b>15710 5000</b> LED POWER SUPPLY MULTIPOWER 55W DALI DT6 1400mA                                                   | 1->13 <input type="checkbox"/> |
| Dimtype: DALI                                                                                                       |                                |
| <b>15710 5300</b> LED POWER SUPPLY MULTIPOWER 12W DALI DT6 350mA                                                    | 1 <input type="checkbox"/>     |
| Dimtype: DALI                                                                                                       |                                |

### kit de montage

|                                                                                     |                                                 |                          |
|-------------------------------------------------------------------------------------|-------------------------------------------------|--------------------------|
|  | <b>15710 0010 B</b> MOUNTING KIT COMPO S TRIM B | <input type="checkbox"/> |
|                                                                                     | Cutout dimension (mm): 55                       |                          |
|                                                                                     | <b>15710 0010 W</b> MOUNTING KIT COMPO S TRIM W | <input type="checkbox"/> |

# DELTALIGHT

## COMPO S IP44 92741

9 15743 9230 B



**15710 0040** MOUNTING KIT COMPO S TRIMLESS

☐

Cutout dimension (mm): 55

### modifier les dispositifs de lumière

**15710 0100 B** COMPO S HONEYCOMB SINGLE USE B

☐

**15710 0110** COMPO S LINEAR SPREAD LENS

☐

Cutout dimension (mm): 26,5

**15710 0120** COMPO S SPREAD LENS

☐

Cutout dimension (mm): 26,5

**15710 0130** COMPO S SOFTENING LENS

☐

Cutout dimension (mm): 26,5

**15710 0140** COMPO S GLASS SBL

☐

Cutout dimension (mm): 26,5

Notes: