



COMPO S IP44 92741

9 15743 9230 B


AVAILABLE IN

SCHWARZ 9 15743 9230 B

CHROM 9 15743 9230 C

DUNKLES CHROM 9 15743 9230 DC

WEISS 9 15743 9230 W

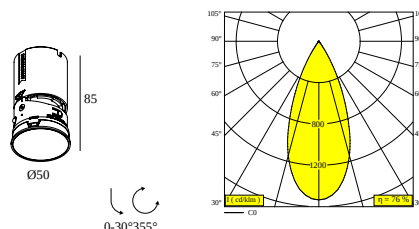

 [View on website](#)



General info	
LOCATION	innen-aussenbereich
INSTALLATION	Decke Einbau
CUTOUT SHAPE/SIZE (MM)	rund - 90
RECESSED DEPTH (MM)	85
THICKNESS OF MOUNTING SURFACE (MM)	max.25
INGRESS PROTECTION	IP44/20
WEIGHT (KG)	0.136
ADJUSTABILITY	0° to 30° schwenkbar, 355° drehbar

Electrical info	
CLASS	III
DIM TYPE	Abhängig von der Art der externen Stromversorgung
ENERGY CLASS	F

Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 6,4W / CRI>90 / 2700K / 476lm
SDCM	SDCM2
RISKGROUP	RG1
BEAMANGLE	40°
LED TECHNICS (LIGHT SOURCE)	476lm // 6,4W // 115lm/W
LED TECHNICS (LUMINAIRE)	361lm // 7,4W // 49lm/W

Requirements

LED POWER SUPPLY 350 mA - DC

Accessories

COMPO S HONEYCOMB SINGLE USE B

COMPO S LINEAR SPREAD LENS

COMPO S SPREAD LENS

COMPO S SOFTENING LENS

COMPO S GLASS SBL

For detailed installation instructions, please consult the manual : [9_15743_XXX0_HAND.pdf](#)

DELTALIGHT

COMPO S IP44 92741

9 15743 9230 B

CEILING COMPATIBILITY

Ceiling Type	Mounting Kit	
	 15710 0010 - MOUNTING KIT COMPO S TRIM	Required
	 15710 0040 - MOUNTING KIT COMPO S TRIMLESS	Required
	 15710 0010 - MOUNTING KIT COMPO S TRIM	Required
	 15710 0040 - MOUNTING KIT COMPO S TRIMLESS	Required
	 15710 0010 - MOUNTING KIT COMPO S TRIM	Required
	 15710 0040 - MOUNTING KIT COMPO S TRIMLESS	Required

FINISH YOUR SPECIFICATION

LED Netzteil

of Fixtures



of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current

15710 3100	LED POWER SUPPLY 18W NO DIM 1400mA	1->4	
15710 3300	LED POWER SUPPLY MULTIPOWER 15W NO DIM 350mA	1->2	
15710 3800	LED POWER SUPPLY MULTIPOWER 10W DIM8 350mA	1	
15710 4500	LED POWER SUPPLY MULTIPOWER 12W DIM1 350mA	1	
15710 5000	LED POWER SUPPLY MULTIPOWER 55W DALI DT6 1400mA	1->13	
Dimtype: DALI			
15710 5300	LED POWER SUPPLY MULTIPOWER 12W DALI DT6 350mA	1	
Dimtype: DALI			

Mounting Kit



15710 0010 B MOUNTING KIT COMPO S TRIM B

Cutout dimension (mm): 55

15710 0010 W MOUNTING KIT COMPO S TRIM W

COMPO S IP44 92741

9 15743 9230 B



15710 0040 MOUNTING KIT COMPO S TRIMLESS

☐

Cutout dimension (mm): 55

Licht veredelndes Zubehör

15710 0100 B COMPO S HONEYCOMB SINGLE USE B

☐

15710 0110 COMPO S LINEAR SPREAD LENS

☐

Cutout dimension (mm): 26,5

15710 0120 COMPO S SPREAD LENS

☐

Cutout dimension (mm): 26,5

15710 0130 COMPO S SOFTENING LENS

☐

Cutout dimension (mm): 26,5

15710 0140 COMPO S GLASS SBL

☐

Cutout dimension (mm): 26,5

Notes: