

# M-OBIN



Introducing Obin, a cutting-edge lighting solution that embodies our commitment to quality and innovation. Based on the patented ERS (Ex-Centriq Rotation System) and equipped with flat lenses, Obin fuses ultimate flexibility with supreme user comfort in a minimalistic surface mounted lighting fixture.

By adjusting the rounded backside - using the ERS system - Obin is 360° rotatable and 45° tiltable without the need of an additional hinge. On the frontside, the sleek lenses create a sense of depth without the need of real physical space.

Specification	
LED Aperture:	1 1/16"
Adjustability:	0° - 45° / 360°
Rating:	IP20

Performance	
LED Maintenance:	L90>50,000h
McAdam Step:	1
CRI:	90
*HP:	13W

Delivered Lumens	2700K		3000K		3500K	
Optics:	MS	MD	MS	MD	MS	MD
M-OBIN	1217Lm	1258Lm	1272Lm	1315Lm	1318Lm	1362Lm

#### Listing

ETL certified to US and Canadian safety standards.

#### Warranty

5-year limited warranty.

## Ordering

ALL BOXES MUST BE FILLED IN TO CORRECTLY ORDER

Example: OBN1-HPMS27A-B-GC-M20H-MDL

Luminaire	Size	Power*	Optic	CCT	Function	Finish	Inner Finish	Application <sup>(1)</sup>	Controls
OBN OBIN	1 Single Spot	HP High Power	MS Medium Narrow Spot 24°  MD Medium Spot 36°	27 2700K  30 3000K  35 3500K	A Adjustable	B Black  BRA Brushed Aluminum  BRAT Brushed Anthracite  BRG Brushed Gold  BROB Brushed Old Bronze  W White	B Black  DC Dark Chromed  FBR Flemish Bronze  FG Flemish Gold  GC Gold Colored  W White	M20H Shiftline M26H / Shiftline M26H + SBL <sup>(2)</sup> / Splitline M20 / Splitline M20 ST Profile	MDL <sup>(2)</sup> 0-10V dim via Modulator  D5 Dali dim  WD <sup>(2)</sup> Wireless dim

<sup>1</sup> Profile system hardware specified separately.  
<sup>2</sup> Shiftline M26H + SBL only available with Controls D5.

## Related Products

M-Spy 39, M-Bowie, Obin

Finish Options

M-OBIN

For Application M20H

BLACK  
(shown in Splitline M20)

BRUSHED ALUMINUM  
(shown in Splitline M20)

BRUSHED ANTHRACITE  
(shown in Splitline M20)

BRUSHED GOLD  
(shown in Splitline M20)

BRUSHED OLD BRONZE  
(shown in Splitline M20)

WHITE  
(shown in Splitline M20)

INNER FINISH

For Application M20H

BLACK

DARK CHROMED

FLEMISH BRONZE

FLEMISH GOLD


GOLD COLORED

WHITE

Accessories

Ø75mm  
Ø2'-15/16  
HONEYCOMB 75  
19810 0110 B

Photometric Data

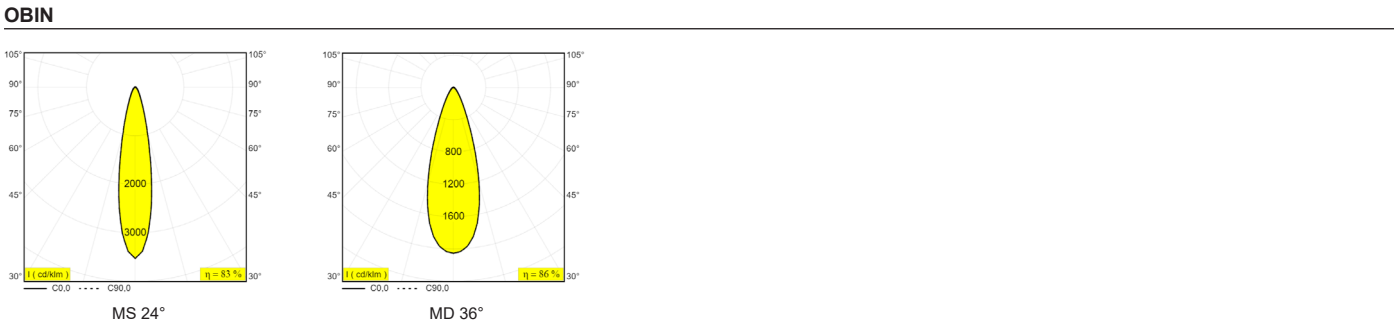

Installation Options

Deltalight's Magnetic Systems all utilize 48V remote power supplies. With a maximum of 96W per power supply, the below details maximum magnetic modules per power feed.

Maximum Capacity per Remote Power Supply	M-Obin
*HP:	6

FOR SYSTEM HARDWARE, REFER TO THE FOLLOWING PROFILE SYSTEMS:  
Shiftline M26H (surface/suspended, high-height, optional curved corner connectors)  
Shiftline M26H + SBL (surface/suspended, high-height, integral continuous light line)  
Splitline M20 (recessed, knife-edge, optional curved corner connectors)  
Splitline M20 ST (recessed, small trim)

As technology changes, please use information above as guidance. For most recent updated information please contact factory. Specifications subject to change without notice.