




HEDRA 452 C 93040 DIM8

472 222 932 ED8 W

AVAILABLE IN
BLACK 472 222 932 ED8 B
BLACK BRONZE 472 222 932 ED8 BBR
GOLD COLOURED 472 222 932 ED8 GC
WHITE 472 222 932 ED8 W

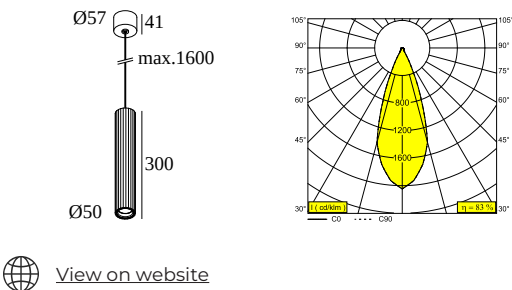

[View on website](#)




General info	
LOCATION	indoor
INSTALLATION	Ceiling Suspended
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.8
ADJUSTABILITY	non adjustable
INFORMATION	REFLECTOR WFL-40° INCL.DIMMABLE LED POWER SUPPLY 350mA-DC INCL.1 x CABLE 2 x 0.75mm ² / 1,6m
Electrical info	
ELECTRICAL	220-240V / 50-60Hz
CLASS	II
POWER SUPPLY	YES
DIM TYPE	mains (phase cut-off)
ENERGY CLASS	F
CERTIFICATES	CB, EAC, ENEC, RCM
Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 6,4W / CRI>90 / 3000K / 587lm
SDCM	SDCM2
RISKGROUP	RG1
BEAMANGLE	40°
LED TECHNICS (LIGHT SOURCE)	587lm // 6,4W // 92lm/W
LED TECHNICS (LUMINAIRE)	488lm // 7,4W // 66lm/W
Requirements	
MIDISPY TUBE	
Options	
CONNECTION TRIMLESS	

For detailed installation instructions, please consult the manual : [472_222_XXX_ED8_HAND.pdf](#)

FINISH YOUR SPECIFICATION

Miscellaneous control equipment




300 90 004 ED8 WIRELESS CONTROL DIM8

Dimtype: WDL = wireless dimmable

Cutout dimension (mm): 40

☐


Suspension parts



15229 0010 B CABLE CLAMP B

☐

Electric connection parts




328 10 03 CONNECTION TRIMLESS O.F.A.

Cutout dimension (mm): 62 (CONCRETE: 102)

☐

Finish your product



414 03 00 B MIDISPY TUBE B

☐

414 03 00 FBR MIDISPY TUBE FBR

☐

414 03 00 FG MIDISPY TUBE FG

☐

414 03 00 MMAT MIDISPY TUBE MMAT

☐

414 03 00 SG MIDISPY TUBE SG

☐

414 03 00 W MIDISPY TUBE W

☐

DELTALIGHT

HEDRA 452 C 93040 DIM8

472 222 932 ED8 W

Notes: