
DELTALIGHT

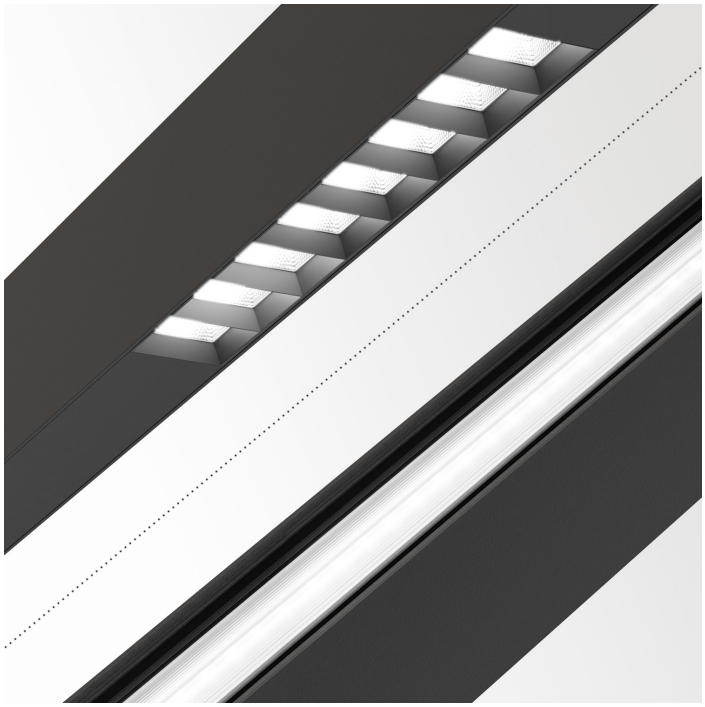

OML50 - INFORM DU HO 3280mm 8+16+8LED 94063 DIM5

REFERENCE 31438 9435 B

AVAILABLE IN
BLACK 31438 9435 B

View on website

General info	
LOCATION	indoor
INGRESS PROTECTION	IP20
WEIGHT (KG)	3.3
INFORMATION	CLUSTER DOWN: 2221lm/m CLUSTER UP: 2776lm/m INCL.DIMMABLE LED POWER SUPPLY (DALI-2 standard) CABLING 1 CIRCUIT

Electrical info	
ELECTRICAL	220-240V / 0|50-60Hz
CLASS	I
POWER SUPPLY	YES
DIM TYPE	DALI
ENERGY CLASS	D
CERTIFICATES	EPD, RCM

Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	DOWN: LED cluster 48,4W / CRI>90 (R9: 50) / 4000K / 7283lm UP: LED cluster 60,5W / CRI>90 (R9: 50) / 4000K / 9104lm
TM-30 VALUES	Rf: 90 / Rg: 101
SDCM	SDCM3
RISKGROUP	RG1
LM80	L80 > 60000
BEAMANGLE	63°
LED TECHNICS (LIGHT SOURCE)	DOWN: 7283lm // 48,4W // 151lm/W UP: 9104lm // 60,5W // 151lm/W

Options

WIRELESS CONTROL DIM5

Notes: