

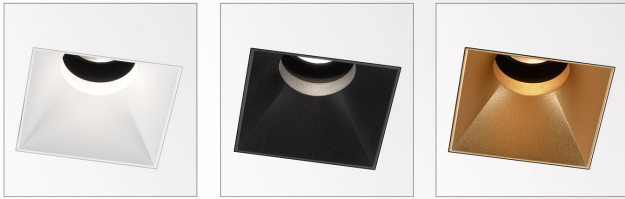



iMAX II SQUARE ADJUSTABLE TRIMLESS MP 93026

24215 9320-S



[View on website](#)

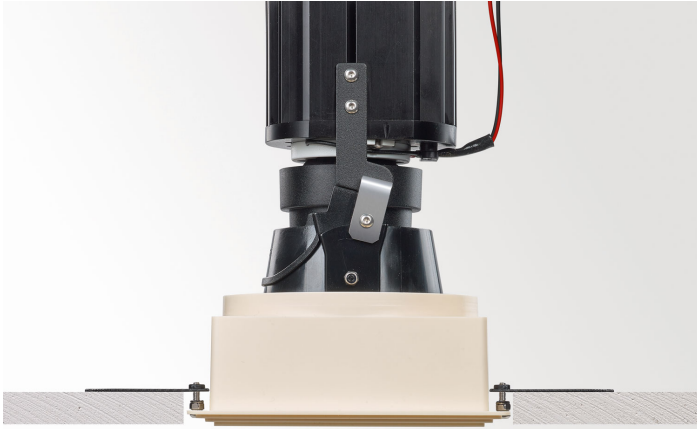

General info

LOCATION	indoor
INSTALLATION	Ceiling Recessed
CUTOUT SHAPE/SIZE (MM)	rectangle - KIT
RECESSED DEPTH (MM)	190
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.4
ADJUSTABILITY	0° to 30° swiveling, 355° rotatable
INFORMATION	LENS FL-26° EXCL.LED POWER SUPPLY 350-500mA-DC

Electrical info

CLASS	III
DIM TYPE	depending on power supply
ENERGY CLASS	E
CERTIFICATES	CB, ENEC

Lightsource info

LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 11,6-17,2W / CRI>90 (R9: 52) / 3000K / 1524-2101lm
TM-30 VALUES	rf: 90 / Rg: 99
SDCM	SDCM1
RISKGROUP	RG1
LM80	L90B10 > 50000
BEAMANGLE	26°
LED TECHNICS (LIGHT SOURCE)	2101lm // 17,2W // 123lm/W
LED TECHNICS (LUMINAIRE)	1586lm // 19,8W // 80lm/W

Requirements

LED POWER SUPPLY 350 / 500mA-DC DIM (Remote)
MOUNTING KIT S102 TRIMLESS O.F.A.
MOUNTING KIT S102 TRIMLESS
iMAX II TUBE TRIMLESS

Accessories

iMAX II ACCESSOIRES
















DELTALIGHT

iMAX II SQUARE ADJUSTABLE TRIMLESS MP 93026

24215 9320-S

For detailed installation instructions, please consult the manual : [24215_XXX0-S_HAND.pdf](#)

CEILING COMPATIBILITY

Ceiling Type	Mounting Kit	
 System ceiling	 400 92 00 OFA - MOUNTING KIT S102 TRIMLESS O.F.A.	Required
	 400 92 00 - MOUNTING KIT S102 TRIMLESS	Required
 Plasterboard	 400 92 00 - MOUNTING KIT S102 TRIMLESS	Required
	 400 92 00 OFA - MOUNTING KIT S102 TRIMLESS O.F.A.	Required
 Concrete + plaster	 400 92 00 OFA - MOUNTING KIT S102 TRIMLESS O.F.A.	Required
	 400 92 00 - MOUNTING KIT S102 TRIMLESS	Required
 Lintel + plaster	 400 92 00 - MOUNTING KIT S102 TRIMLESS	Required
	 400 92 00 OFA - MOUNTING KIT S102 TRIMLESS O.F.A.	Required
 Hollow-core slab + plaster	 400 92 00 OFA - MOUNTING KIT S102 TRIMLESS O.F.A.	Required
	 400 92 00 - MOUNTING KIT S102 TRIMLESS	Required

FINISH YOUR SPECIFICATION


LED power supplies

of Fixtures



of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current




300 48 350 ED1 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM1

1

Dimtype: 1-10V

Cutout dimension (mm): 30




300 48 350 ED5 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5

1

Dimtype: DALI

Cutout dimension (mm): 45



300 48 350 MDL LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W MDL

1

Dimtype: non-dimmable

Cutout dimension (mm): 30

DELTALIGHT

iMAX II SQUARE ADJUSTABLE TRIMLESS MP 93026

24215 9320-S



300 48 350 WDL LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W WDL

1



Dimtype: WDL = wireless dimmable

Cutout dimension (mm): 45



300 48 500 ED1 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM1

1



Dimtype: 1-10V

Cutout dimension (mm): 30




300 48 500 ED5 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM5

1



Dimtype: DALI

Cutout dimension (mm): 45




300 48 500 MDL LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W MDL

1



Dimtype: non-dimmable

Cutout dimension (mm): 30




300 48 500 WDL LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W WDL

1



Dimtype: WDL = wireless dimmable

Cutout dimension (mm): 45




300 90 61 LED POWER SUPPLY MULTI-POWER DIM6

1 | 1



Dimtype: mains (phase cut-off) or push button

Cutout dimension (mm): 56




300 90 63 LED POWER SUPPLY MULTI-POWER DIM9

2(2) | 2(2)



Dimtype: 1-10V or DALI or push button

Cutout dimension (mm): 82




300 90 64 LED POWER SUPPLY MULTI-POWER DIM7

1(1) | 1(0)



Dimtype: 1-10V or push button

Cutout dimension (mm): 72




300 90 67 LED POWER CONVERTER 24V-DC TO MULTI CURRENT 48W DIM9

1 | -



Dimtype: 1-10V or DALI or push button



300 90 68 LED POWER SUPPLY MULTI-POWER DIM5

1(1) | 1(0)




Dimtype: DALI

Cutout dimension (mm): 72

DELTALIGHT

iMAX II SQUARE ADJUSTABLE TRIMLESS MP 93026

24215 9320-S



300 90 69 LED POWER SUPPLY MULTI-POWER HV DIM9

3(3) | 3(2)

Dimtype: 1-10V or DALI or push button

Cutout dimension (mm): 84




300 90 124 LED POWER SUPPLY MULTI-POWER DIM7

1(1) | 1(0)

Dimtype: 1-10V or push button

Cutout dimension (mm): 55




300 90 125 LED POWER SUPPLY MULTI-POWER MINI DIM5

1(1) | 1(0)

Dimtype: DALI

Cutout dimension (mm): 55




300 90 135 LED POWER SUPPLY MULTI-POWER HV

2->2 | 2

Dimtype: non-dimmable

Cutout dimension (mm): 90




21012 0010 LED POWER SUPPLY MULTI POWER

1 | 1

Dimtype: non-dimmable

Cutout dimension (mm): 50




21012 0021 LED POWER SUPPLY MULTI POWER DIM1

1 | 1

Dimtype: 1-10V

Cutout dimension (mm): 54




21012 0035 LED POWER SUPPLY MULTI POWER DIM5

1 | 1

Dimtype: DALI

Cutout dimension (mm): 54




21012 004W LED POWER SUPPLY MULTI-POWER WDL

2(2) | 2(2)

Dimtype: WDL = wireless dimmable

Cutout dimension (mm): 84




21012 005W LED POWER SUPPLY MULTI-POWER COMPACT WDL

1 | 1

Dimtype: WDL = wireless dimmable

Cutout dimension (mm): 54



21012 0268 LED POWER SUPPLY MULTI POWER 200-350 / 15W DIM8

1

Dimtype: mains (phase cut-off)

Cutout dimension (mm): 50

DELTALIGHT

iMAX II SQUARE ADJUSTABLE TRIMLESS MP 93026

24215 9320-S




21012 0288 LED POWER SUPPLY MULTI POWER 500-700 / 36W DIM8

1

Dimtype: mains (phase cut-off)

Cutout dimension (mm): 55




21012 0298 LED POWER SUPPLY MULTI POWER 250-900 / 20W DIM8

1 | 1

Dimtype: mains (phase cut-off)

Cutout dimension (mm): 48




21012 0480 LED POWER SUPPLY 350mA-DC / 17W IP68

1(1)

Dimtype: non-dimmable

Cutout dimension (mm): 60




21012 0500 LED POWER SUPPLY 500mA-DC / 24W IP68

1(0)

Dimtype: non-dimmable

Cutout dimension (mm): 60




21032 0295 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5

1

Dimtype: DALI

Cutout dimension (mm): 30




21032 0305 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM5

1

Dimtype: DALI

Cutout dimension (mm): 30

Mounting kits



400 92 00 MOUNTING KIT S102 TRIMLESS

Cutout dimension (mm): 125 x 125



400 92 00 OFA MOUNTING KIT S102 TRIMLESS O.F.A.


Cutout dimension (mm): 230 x 160

DELTALIGHT


iMAX II SQUARE ADJUSTABLE TRIMLESS MP 93026

24215 9320-S


Light altering devices




24213 0050 B iMAX II HONEYCOMB B




24213 0060 iMAX II GLASS SBL



24213 0070 iMAX II LINEAR SPREAD LENS




24213 0090 iMAX II SOFTENING LENS



24213 0100 iMAX II SPREAD LENS

Finish your product



24213 0030 B iMAX II TUBE SQUARE TRIMLESS B

24213 0030 FG iMAX II TUBE SQUARE TRIMLESS FG

24213 0030 MMAT iMAX II TUBE SQUARE TRIMLESS MMAT

24213 0030 W iMAX II TUBE SQUARE TRIMLESS W

DELTALIGHT

iMAX II SQUARE ADJUSTABLE TRIMLESS MP 93026

24215 9320-S

Notes: