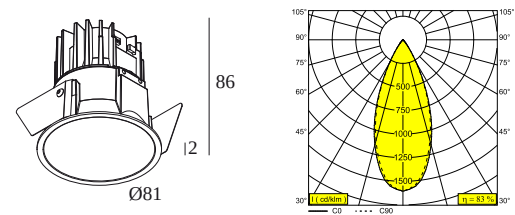




DEEP RINGO HE 94040

19440 9430 PB

AVAILABLE IN
NOIR 19440 9430 B
ALU BROSSÉ 19440 9430 BRA
ANTHRACITE BROSSÉ 19440 9430 BRAT
BRONZE BRUN BROSSÉ 19440 9430 BRBB
CUIVRE BROSSÉ 19440 9430 BRCU
OR BROSSÉ 19440 9430 BRG
BRONZE VIEUX BROSSÉ 19440 9430 BROB
CRÈME 19440 9430 CR
FLEMISH BRONZE 19440 9430 FBR
FLEMISH GOLD 19440 9430 FG
COULEUR OR 19440 9430 GC
NOIR PIANO 19440 9430 PB
BLANC 19440 9430 W



[View on website](#)



General info	
LOCATION	interieur
INSTALLATION	Plafond Encastré
CUTOUT SHAPE/SIZE (MM)	circulaire - 76
RECESSED DEPTH (MM)	90
THICKNESS OF MOUNTING SURFACE (MM)	min.5
INGRESS PROTECTION	IP43/20
WEIGHT (KG)	0.2
ADJUSTABILITY	non réglable
INFORMATION	LENS WFL-40° EXCL.LED POWER SUPPLY 350mA-DC

Electrical info	
CLASS	III
DIM TYPE	selon le type d'alimentation externe
ENERGY CLASS	D
CERTIFICATION	EPD, LCA

Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 6W / CRI>90 (R9: 60) / 4000K / 975lm
RVALUES	rf: 96 / Rg: 99
SDMC	SDCM2
RISKGROUP	RG1
LM80	L90B10 > 50000
BEAMANGLE	40°
LED TECHNICS (LIGHT SOURCE)	975lm // 6W // 163lm/W
LED TECHNICS (LUMINAIRE)	793lm // 6,9W // 115lm/W

Remarks
High Efficacy : > 100lm/W

Requirements
LED POWER SUPPLY 350mA-DC DIM


For detailed installation instructions, please consult the manual : [19440_XXX0_HAND.pdf](#)

CEILING COMPATIBILITY

Ceiling Type	Mounting Kit
 System ceiling	-
 Plasterboard	-
 Stucanet	-
 Wood	-
 Concrete	-
 Concrete + plaster	-
 Lintel + plaster	-
 Hollow-core slab	-
 Hollow-core slab + plaster	-
 Stretched ceiling	-

FINISH YOUR SPECIFICATION







les batteries de secours

	21032 0270 B EMERGENCY UNIT 7W / 1h + LED INDICATOR HOLDER B	☐
	21032 0270 W EMERGENCY UNIT 7W / 1h + LED INDICATOR HOLDER W	☐

DELTALIGHT

DEEP RINGO HE 94040

19440 9430 PB

les alimentations led			# of Fixtures
 web2print_power_supply_info_box			Min current Max current
	300 90 91 LED POWER SUPPLY 350mA-DC / 15W Dimtype: non dimmable Cutout dimension (mm): 40	2(1)	☐
	300 90 110 LED POWER SUPPLY 350mA-DC / 10W DIM8 Dimtype: fin de phase Cutout dimension (mm): 42	1	☐
	300 90 116 LED POWER SUPPLY 350mA-DC / 18W DIM8 Dimtype: fin de phase Cutout dimension (mm): 55	2->2	☐
	21012 0515 LED POWER SUPPLY MULTI POWER DIM5 Dimtype: DALI Cutout dimension (mm): 55	1(1)	☐
	21012 0520 LED POWER SUPPLY 350mA-DC / 8W Dimtype: non dimmable Cutout dimension (mm): 47	1(0)	☐
	21012 0575 LED POWER SUPPLY MULTI POWER DIM5 Dimtype: DALI Cutout dimension (mm): 55	2->3(2)	☐

Notes: