




SOLI - 52 SOFT 93045 Q-DIM

27186 903Q GC

AVAILABLE IN
BLACK 27186 903Q B
GOLD COLOURED 27186 903Q GC
WHITE 27186 903Q W

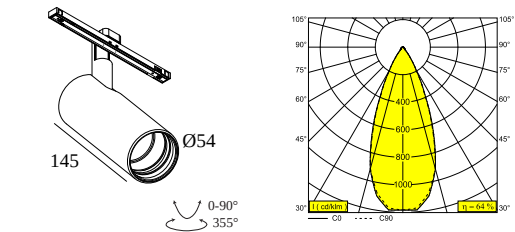

 [View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Low voltage systems Low voltage system mounted
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.4
ADJUSTABILITY	0° to 90° swiveling, 360° rotatable
INFORMATION	REFLECTOR WFL-45° EXCL.LED POWER SUPPLY 48V-DC Optional REFLECTORS 20° & 30° available

Electrical info	
ELECTRICAL	48V-DC
CLASS	III
DIM TYPE	Qbus dim
ENERGY CLASS	F
CERTIFICATES	CB, ENEC, LCA

Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 10,2W / CRI>90 (R9: 50) / 3000K-1800K / 1038lm
SDCM	SDCM2
RISKGROUP	RG1
LM80	L90B10 > 50000
BEAMANGLE	45°
LED TECHNICS (LIGHT SOURCE)	1038lm // 10,2W // 109lm/W
LED TECHNICS (LUMINAIRE)	664lm // 11,7W // 57lm/W

Requirements	
SPY 52 TUBE	
LED POWER SUPPLY 48V-DC	

Accessories	
HONEYCOMB 42	
SPREAD LENS 42	
LINEAR SPREAD LENS 42	
SOFTENING LENS 42	
GLASS SBL 42	

DELTALIGHT

SOLI - 52 SOFT 93045 Q-DIM

27186 903Q GC

For detailed installation instructions, please consult the manual : [27186_XXXQ_HAND.pdf](#)

FINISH YOUR SPECIFICATION

Light altering devices



19810 0010 B HONEYCOMB 42 SINGLE USE B

☐

19810 0020 LINEAR SPREAD LENS 42

☐

19810 0030 SPREAD LENS 42

☐

19810 0040 SOFTENING LENS 42

☐

19810 0050 GLASS SBL 42

☐

19810 0060 B HONEYCOMB 42 DOUBLE USE B

☐

Finish your product



19810 0100 B SPY 52 TUBE B

☐

DELTALIGHT

SOLI - 52 SOFT 93045 Q-DIM


27186 903Q GC

19810 0100 FBR	SPY 52 TUBE FBR	☐
19810 0100 FG	SPY 52 TUBE FG	☐
19810 0100 GC	SPY 52 TUBE GC	☐
19810 0100 W	SPY 52 TUBE W	☐

Replaceable reflector / lens

	19810 0180	SPY 52 REFLECTOR 20°	☐
	19810 0190	SPY 52 REFLECTOR 45°	☐
	19810 0240	SPY 52 REFLECTOR 30°	☐

COMPATIBLE COMPOSABLES

SOLISCAPE profile	Available Colours
 27111 0020 SOLI - PROFILE 2m	 
 27111 0030 SOLI - PROFILE 3m	 

Notes:

DELTALIGHT

SOLI - 52 SOFT 93045 Q-DIM

27186 903Q GC