



SPY 39 L CLIP 93040

24134 9330 B-B

AVAILABLE IN

NOIR-NOIR 24134 9330 B-B

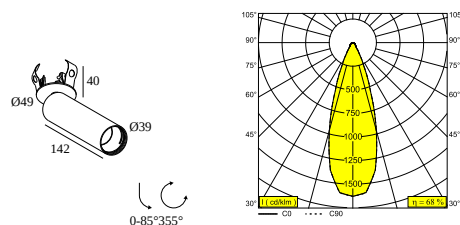
FLEMISH BRONZE-NOIR 24134 9330 FBR-B

FLEMISH GOLD-NOIR 24134 9330 FG-B

ENTIÈREMENT BLANC 24134 9330 FW

COULEUR OR-NOIR 24134 9330 GC-B

BLANC-BLANC 24134 9330 W-W



[View on website](#)



General info

LOCATION	interieur
INSTALLATION	Plafond Semi-encastré
CUTOUT SHAPE/SIZE (MM)	circulaire - 43
RECESSED DEPTH (MM)	40
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.4
ADJUSTABILITY	0° à 85° inclinable, 355° rotatif
INFORMATION	REFLECTOR WFL-40° EXCLLED POWER SUPPLY 350-500mA-DC

Electrical info

CLASS	III
DIM TYPE	selon le type d'alimentation externe
ENERGY CLASS	D
CERTIFICATION	CB, ENEC, LCA

Lightsource info

LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 5,8-8,6W / CRI>90 (R9: 52) / 3000K / 787-1089lm
RVALUES	rf: 90 / Rg: 99
SDMC	SDCM1
RISKGROUP	RG1
LM80	L90B10 > 50000
BEAMANGLE	40°
LED TECHNICS (LIGHT SOURCE)	1089lm // 8,6W // 127lm/W
LED TECHNICS (LUMINAIRE)	737lm // 9,9W // 75lm/W









Requirements

SPY 39 L TUBE

LED POWER SUPPLY 350 / 500mA-DC DIM











For detailed installation instructions, please consult the manual : [24134_XXX0_HAND.pdf](#)

FINISH YOUR SPECIFICATION

les alimentations led		# of Fixtures
 web2print_power_supply_info_box		Min current Max current
	300 48 350 ED1 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM1 Dimtype: 1 à 10 V Cutout dimension (mm): 30	2 ☐
	300 48 350 ED5 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5 Dimtype: DALI Cutout dimension (mm): 45	2 ☐
	300 48 350 MDL LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W MDL Dimtype: non dimmable Cutout dimension (mm): 30	2 ☐
	300 48 350 WDL LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W WDL Dimtype: WDL = dimmable sans fil Cutout dimension (mm): 45	2 ☐
	300 48 500 ED1 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM1 Dimtype: 1 à 10 V Cutout dimension (mm): 30	2 ☐
	300 48 500 ED5 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM5 Dimtype: DALI Cutout dimension (mm): 45	2 ☐
	300 48 500 MDL LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W MDL Dimtype: non dimmable Cutout dimension (mm): 30	2 ☐
	300 48 500 WDL LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W WDL Dimtype: WDL = dimmable sans fil Cutout dimension (mm): 45	2 ☐

SPY 39 L CLIP 93040







24134 9330 B-B

	300 90 61 LED POWER SUPPLY MULTI-POWER DIM6 Dimtype: fin de phase ou bouton poussoir Cutout dimension (mm): 56	2 2	☐
	300 90 63 LED POWER SUPPLY MULTI-POWER DIM9 Dimtype: 1 à 10 V ou DALI ou bouton poussoir Cutout dimension (mm): 82	4(4) 4(4)	☐
	300 90 64 LED POWER SUPPLY MULTI-POWER DIM7 Dimtype: 1 à 10 V ou bouton poussoir Cutout dimension (mm): 72	2(2) 2(1)	☐
	300 90 67 LED POWER CONVERTER 24V-DC TO MULTI CURRENT 48W DIM9 Dimtype: 1 à 10 V ou DALI ou bouton poussoir	2 -	☐
	300 90 68 LED POWER SUPPLY MULTI-POWER DIM5 Dimtype: DALI Cutout dimension (mm): 72	2(2) 2(1)	☐
	300 90 69 LED POWER SUPPLY MULTI-POWER HV DIM9 Dimtype: 1 à 10 V ou DALI ou bouton poussoir Cutout dimension (mm): 84	2->6(6) 6(4)	☐
	300 90 124 LED POWER SUPPLY MULTI-POWER DIM7 Dimtype: 1 à 10 V ou bouton poussoir Cutout dimension (mm): 55	3(2) 2(1)	☐
	300 90 125 LED POWER SUPPLY MULTI-POWER MINI DIM5 Dimtype: DALI Cutout dimension (mm): 55	2(2) 2(1)	☐
	300 90 135 LED POWER SUPPLY MULTI-POWER HV Dimtype: non dimmable Cutout dimension (mm): 90	3->4 2->4	☐
	21012 0010 LED POWER SUPPLY MULTI POWER Dimtype: non dimmable Cutout dimension (mm): 50	2 2	☐

DELTALIGHT

SPY 39 L CLIP 93040


24134 9330 B-B

	21012 0021 LED POWER SUPPLY MULTI POWER DIM1 Dimtype: 1 à 10 V Cutout dimension (mm): 54	3 3	☐
	21012 0035 LED POWER SUPPLY MULTI POWER DIM5 Dimtype: DALI Cutout dimension (mm): 54	3 3	☐
	21012 004W LED POWER SUPPLY MULTI-POWER WDL Dimtype: WDL = dimmable sans fil Cutout dimension (mm): 84	4(4) 3(3)	☐
	21012 005W LED POWER SUPPLY MULTI-POWER COMPACT WDL Dimtype: WDL = dimmable sans fil Cutout dimension (mm): 54	3 3	☐
	21012 0268 LED POWER SUPPLY MULTI POWER 200-350 / 15W DIM8 Dimtype: fin de phase Cutout dimension (mm): 50	2->2 0	☐
	21012 0278 LED POWER SUPPLY MULTI POWER 500-700 / 20W DIM8 Dimtype: fin de phase Cutout dimension (mm): 55	1	☐
	21012 0288 LED POWER SUPPLY MULTI POWER 500-700 / 36W DIM8 Dimtype: fin de phase Cutout dimension (mm): 55	2->3	☐
	21012 0298 LED POWER SUPPLY MULTI POWER 250-900 / 20W DIM8 Dimtype: fin de phase Cutout dimension (mm): 48	2 2	☐
	21012 0308 LED POWER SUPPLY 350mA / 7,35W DIM8 Dimtype: fin de phase Cutout dimension (mm): 40	1	☐
	21012 0318 LED POWER SUPPLY 500mA / 10W DIM8 Dimtype: fin de phase Cutout dimension (mm): 40	1	☐

DELTALIGHT

SPY 39 L CLIP 93040

24134 9330 B-B



21012 0480


LED POWER SUPPLY 350mA-DC / 17W IP68

2(2)

☐

Dimtype: non dimmable

Cutout dimension (mm): 60



21012 0500


LED POWER SUPPLY 500mA-DC / 24W IP68

2(1)

☐

Dimtype: non dimmable

Cutout dimension (mm): 60



21032 0295


LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5

2

☐

Dimtype: DALI

Cutout dimension (mm): 30



21032 0305

LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM5


2

☐

Dimtype: DALI

Cutout dimension (mm): 30

Terminez votre produit



24144 0020 B

SPY 39 L TUBE B

☐

24144 0020 FBR

SPY 39 L TUBE FBR

☐

24144 0020 FG

SPY 39 L TUBE FG

☐

24144 0020 GC

SPY 39 L TUBE GC

☐

24144 0020 W

SPY 39 L TUBE W

☐

COMPATIBLE COMPOSABLES

ZOOVER 4CLIP

Available Colours



28215 0005


ZOOVER 4CLIP 120 LIGHT GREY DIM5




DELTALIGHT

SPY 39 L CLIP 93040


24134 9330 B-B



28216 0005 ZOOVER 4CLIP 120 DARK GREY DIM5



28217 0005 ZOOVER 4CLIP 140 LIGHT GREY DIM5



28218 0005 ZOOVER 4CLIP 140 DARK GREY DIM5



Notes: