

M-SPY WALLWASH 52 & 66



Spy is being offered in wallwash versions. These accent lights have a built in wallwash optic to evenly illuminate vertical surfaces. Depending on what to illuminate, the spotlights can be adjusted accordingly and tilted into the desired position.

Specification	
Aperture:	1 ⁵ / ₁₆ "
Adjustability:	Adjustable 0-90° / 355°
Rating:	IP20

Performance	Static CCT (Spy 52)	Static CCT (Spy 66)	Soft Dim
LED Maintenance:	L90>50,000h		L90>50,000h
McAdam Step:	1		2
CRI:	90		90
*SP:			12W
*HP:	10W	20W	

Delivered Lumens	2700K	3000K	3500K	3000-1800K
Spy 52 WW:	491Lm	514Lm	532Lm	490Lm
Spy 66 WW:	1099Lm	1149Lm	1191Lm	

Listing

ETL certified to US and Canadian safety standards.

Warranty

5-year limited warranty.

Ordering

ALL BOXES MUST BE FILLED IN TO CORRECTLY ORDER

Example: SPY66-HP27WWA-W-ML-WD

Luminaire	Size	Power*	CCT	Optic	Function	Finish	Application ⁽²⁾	Controls
SPY SPY	52 52mm / 2 ¹ / ₁₆ " Diameter	SP Standard Power	SD 3000-1800K	WW Wallwash	A Adjustable	B Black	M20H Shiftline M26H / Shiftline M26H + SBL ⁽³⁾ / Splitline M20 / Splitline M20 ST Profile	MDL ⁽³⁾ 0-10V dim via Modulator D5 Dali dim WD ⁽³⁾ Wireless dim
		HP High Power	27 2700K			FBR ⁽¹⁾ Flemish Bronze		
	66 ⁽¹⁾ 66mm / 2 ⁹ / ₃₂ " Diameter	HP High Power	30 3000K 35 3500K			FG ⁽¹⁾ Flemish Gold GC ⁽¹⁾ Gold Colored W White		

1 Spy 66 (Size 66) only available in Finish Black or White.

2 Profile system hardware specified separately.


3 Shiftline M26H + SBL only available with Controls D5.

Related Products

M-Spy 27/39, Spy 52/66/Focus, Spy 27, Spy 39, Spy 52, Spy 66, Spy Focus, Spy S, M-Microspy C (pendant), Superloop-Spy 52/66/Focus MDL

Finish Options

SPY 52 WW

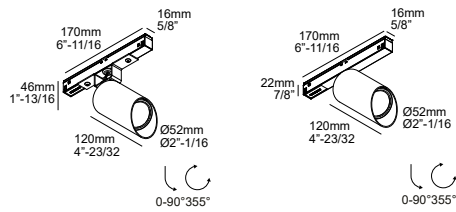

For Application M20H

For Application ML



BLACK

(Shown in Shiftline M26L)



WHITE

(Shown in Shiftline M26L)



GOLD COLORED

(Shown in Shiftline M26L)



FLEMISH GOLD


(Shown in Shiftline M26L)



FLEMISH BRONZE

(Shown in Shiftline M26L)

SPY 66 WW

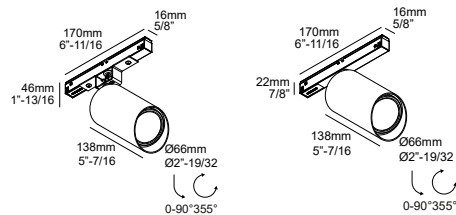

For Application M20H

For Application ML



BLACK

(Shown in Shiftline M26L)




WHITE


(Shown in Shiftline M26L)

Photometric Data



SPY 52 WW



SPY 66 WW




SPY 52 WW (SOFT DIM)

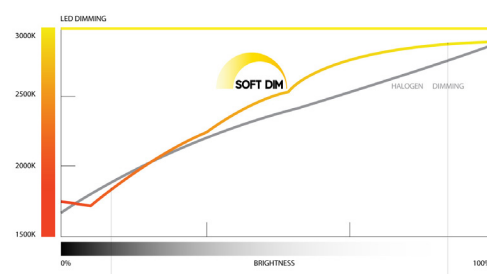


Soft Dim technology replicates the dimming behavior of a conventional lamp where the color temperature increases in warmth as it is dimmed. This is achieved through the use of specially selected LEDs of different color temperatures and power types from premium chip manufacturers. Consistency is ensured without complexity with the use of specific and precise LED selection. The LED's selected have color tolerances that are higher than 2 SDCM ensuring module-to-module accuracy.

WALLWASH

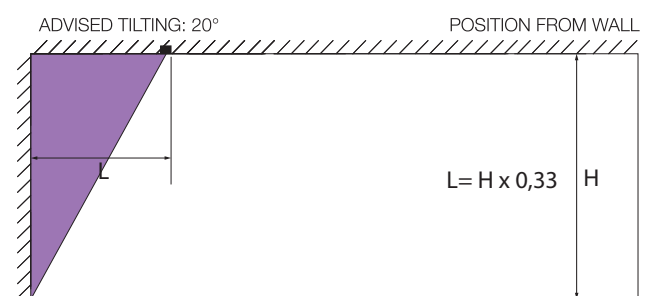

example: H=3000 mm → L= 3000 mm x 0,33 = 990 mm
example: H=119" → L= 119" x 0,33 = 39-1/4"

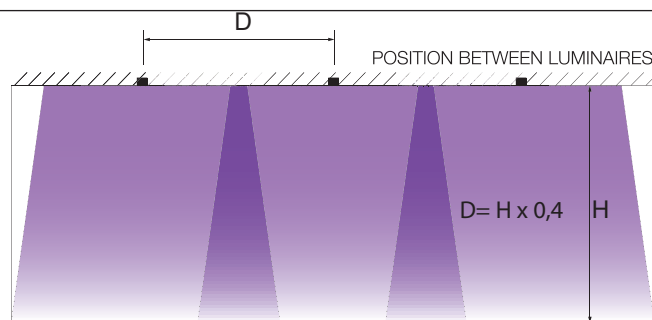

example: H=3000 mm → D= 3000 mm x 0,4 = 1200 mm
example: H=119" → D= 119" x 0,4 = 47-5/8"

Installation Options

Delta Light's Magnetic Systems all utilize 48V remote power supplies. With a maximum of 96W per power supply, the below details maximum magnetic modules per power feed.

Maximum Capacity per Remote Power Supply	M-Spy 52 WW	M-Spy 66 WW
*SP (Soft Dim):	7	
*HP	9	4

FOR SYSTEM HARDWARE, REFER TO THE FOLLOWING PROFILE SYSTEMS:
Shiftline M26H (surface/suspended, high-height, optional curved corner connectors)
Shiftline M26H + SBL (surface/suspended, high-height, integral continuous light line)
Shiftline M26L (surface/suspended, low-height, stacking possible)
Splitline M20 (recessed, knife-edge, optional curved corner connectors)
Splitline M20 ST (recessed, small trim)

As technology changes, please use information above as guidance. For most recent updated information please contact factory. Specifications subject to change without notice.