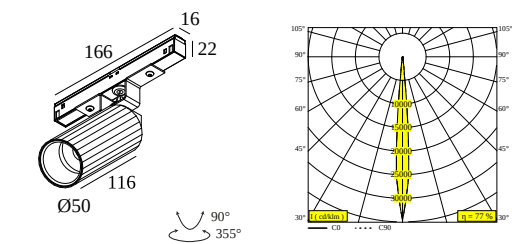




M26L - HEDRA 92708 MDL

23250 9210 BBR

AVAILABLE IN
BLACK BRONZE 23250 9210 BBR
GOLD COLOURED 23250 9210 GC



 [View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Low voltage systems Low voltage system mounted
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.4
ADJUSTABILITY	0° to 90° swiveling, 355° rotatable
INFORMATION	LENS SP-8° EXCL.LED POWER SUPPLY 48V-DC

Electrical info	
ELECTRICAL	48V-DC
CLASS	III
DIM TYPE	MDL = 1-10V or DALI or push button
ENERGY CLASS	F
CERTIFICATES	CB, ENEC

Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 5,7W / CRI>90 (R9: 56) / 2700K / 519lm
TM-30 VALUES	rf: 91 / Rg: 99
SDCM	SDCM2
RISKGROUP	RG2 (threshold 0,6m)
LM80	L90B10 > 41000
BEAMANGLE	8°
LED TECHNICS (LIGHT SOURCE)	519lm // 5,7W // 90lm/W
LED TECHNICS (LUMINAIRE)	397lm // 6,6W // 61lm/W

Remarks
Take a look at our MAGNETIC PROFILES movie

Requirements
VIZIR TUBE
LED POWER SUPPLY 48V-DC

Options
DIMMABLE MODULATOR

Accessories
VIZIR HONEYCOMB
VIZIR SOFTENING LENS

M26L - HEDRA 92708 MDL

23250 9210 BBR

For detailed installation instructions, please consult the manual : [23250_9XX0_HAND.pdf](#)


FINISH YOUR SPECIFICATION

Current supply

of Fixtures

 # of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current



21032 0030 SMART 48 MODULATOR PLUG-IN WD

27


Dimtype: WDL = wireless dimmable

SMART 48

of Fixtures

 # of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.


Min current | Max current



300 90 011 SMART 48 MODULATOR DIM9

27

Dimtype: 1-10V or DALI or push button



300 90 012 SMART 48 MODULATOR WD

27


Dimtype: WDL = wireless dimmable

LED power supplies

of Fixtures

 # of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current



300 89 48 100 LED POWER SUPPLY 48V-DC / 100W DIN




14

Dimtype: non-dimmable



DELTALIGHT

M26L - HEDRA 92708 MDL


23250 9210 BBR

	300 89 48 240 LED POWER SUPPLY 48V-DC / 240W DIN	34	☐
	Dimtype: non-dimmable		
	21012 0230 LED POWER SUPPLY 48V-DC / 100W	14	☐
	Dimtype: non-dimmable		
	Cutout dimension (mm): 40		
	21012 0240 LED POWER SUPPLY 48V-DC / 200W	29	☐
	Dimtype: non-dimmable		
	Cutout dimension (mm): 40		

Light altering devices

	473 03 01 B VIZIR HONEYCOMB B		☐
	473 03 04 VIZIR SOFTENING LENS		☐

Finish your product









	473 01 00 B VIZIR TUBE B		☐
	473 01 00 FBR VIZIR TUBE FBR		☐
	473 01 00 FG VIZIR TUBE FG		☐
	473 01 00 W VIZIR TUBE W		☐

DELTALIGHT

M26L - HEDRA 92708 MDL

23250 9210 BBR

COMPATIBLE COMPOSABLES

SHIFTLINE M26L profile (+ SHIFTLINE M26L MATRIX)		Available Colours
	23358 0000 SLM26L - PROFILE	 
	23358 0010 SLM26L - PROFILE 1m	 
	23358 0020 SLM26L - PROFILE 2m	         
	23358 0030 SLM26L - PROFILE 3m	         
SHIFTLINE M35R profile		Available Colours
	23375 0000 SLM35R - PROFILE	
	23375 0010 SLM35R - PROFILE 1m	
	23375 0020 SLM35R - PROFILE 2m	
	23375 0030 SLM35R - PROFILE 3m	

Notes:

DELTALIGHT

M26L - HEDRA 92708 MDL

23250 9210 BBR