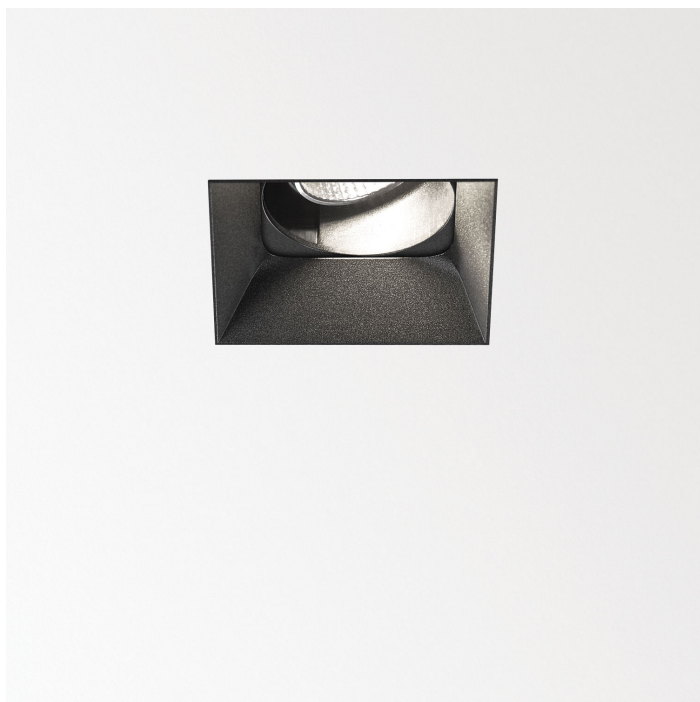




ENTERO SQ-S TRIMLESS IP TW 96545



28552 9030 B

AVAILABLE IN

BLACK 28552 9030 B

FULL WHITE 28552 9030 FW

GOLD COLOURED 28552 9030 GC



[View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Ceiling Recessed
CUTOUT SHAPE/SIZE (MM)	rectangle - Ø KIT
RECESSED DEPTH (MM)	120
INGRESS PROTECTION	IP44/20
WEIGHT (KG)	0.24
ADJUSTABILITY	0° to 20° swiveling, 355° rotatable
INFORMATION	REFLECTOR WFL-45° EXCL.LED POWER SUPPLY 500mA-DC TW - (DALI DT8)
Electrical info	
CLASS	III
DIM TYPE	depending on power supply
ENERGY CLASS	E
CERTIFICATES	CB, ENEC, EPD
Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 9W / CRI>90 (R9: 50) / 2700K-6500K / 1087lm
TM-30 VALUES	rf: 89 / Rg: 100
SDCM	SDCM2
RISKGROUP	RG1
LM80	L90B10 > 50000
BEAMANGLE	45°
LED TECHNICS (LIGHT SOURCE)	1087lm // 9W // 121lm/W
LED TECHNICS (LUMINAIRE)	711lm // 10,4W // 69lm/W

Requirements

MOUNTING KIT ENTERO SQUARE S

LED POWER SUPPLY 500mA-DC TW (Remote)

For detailed installation instructions, please consult the manual : [28552_XXX0_HAND.pdf](#)

ENTERO SQ-S TRIMLESS IP TW 96545


28552 9030 B


CEILING COMPATIBILITY

Ceiling Type	Mounting Kit		
 System ceiling		28400 0040 - MOUNTING KIT ENTERO SQ-S	Required
 Plasterboard		28400 0040 - MOUNTING KIT ENTERO SQ-S	Required
 Stucanet		28400 0040 - MOUNTING KIT ENTERO SQ-S	Required
 Wood		28400 0040 - MOUNTING KIT ENTERO SQ-S	Required
 Concrete + plaster		28400 0040 - MOUNTING KIT ENTERO SQ-S	Required
 Lintel + plaster		28400 0040 - MOUNTING KIT ENTERO SQ-S	Required
 Hollow-core slab + plaster		28400 0040 - MOUNTING KIT ENTERO SQ-S	Required
 Stretched ceiling		28400 0160 - MOUNTING KIT ENTERO SQ-S WSC	Required
		28400 0100 - MOUNTING KIT ENTERO SQ-S CSC	Required

FINISH YOUR SPECIFICATION

LED power supplies	# of Fixtures
 # of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the ' ' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.	Min current Max current

	21012 0355 LED POWER SUPPLY 500mA-DC 2CH TW DIM5	2	
	Dimtype: DALI		
	Cutout dimension (mm): 85		


Mounting kits		
	28400 0040 MOUNTING KIT ENTERO SQ-S	
	Cutout dimension (mm): 106 x 106	

DELTALIGHT



ENTERO SQ-S TRIMLESS IP TW 96545

28552 9030 B

Mounting kits stretched ceiling

	28400 0100 MOUNTING KIT ENTERO SQ-S CSC	☐
	28400 0160 MOUNTING KIT ENTERO SQ-S WSC	☐

Replaceable reflector / lens

	19810 0180 SPY 52 REFLECTOR 20°	☐
	19810 0190 SPY 52 REFLECTOR 45°	☐
	19810 0240 SPY 52 REFLECTOR 30°	☐

Notes: