




M20/M26H - HEDRA 93008 DIM5

23363 9315 BBR

AVAILABLE IN
BLACK BRONZE 23363 9315 BBR
GOLD COLOURED 23363 9315 GC

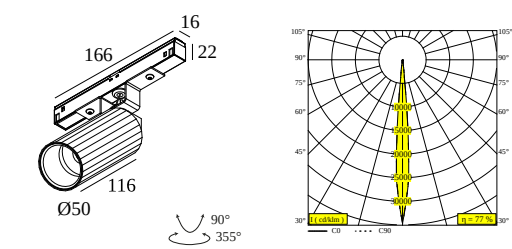

 [View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Low voltage systems Low voltage system mounted
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.4
ADJUSTABILITY	0° to 90° swiveling, 355° rotatable
INFORMATION	LENS SP-8° EXCL.LED POWER SUPPLY 48V-DC

Electrical info	
ELECTRICAL	48V-DC
CLASS	III
DIM TYPE	DALI
ENERGY CLASS	F
CERTIFICATES	CB, ENEC

Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 5,7W / CRI>90 (R9: 55) / 3000K / 519lm
TM-30 VALUES	rf: 92 / Rg: 98
SDCM	SDCM2
RISKGROUP	RG2 (threshold 0,6m)
LM80	L90B10 > 41000
BEAMANGLE	8°
LED TECHNICS (LIGHT SOURCE)	519lm // 5,7W // 90lm/W
LED TECHNICS (LUMINAIRE)	397lm // 6,6W // 61lm/W

Remarks
Take a look at our MAGNETIC PROFILES movie

Requirements
VIZIR TUBE
LED POWER SUPPLY 48V-DC

Accessories
VIZIR HONEYCOMB
VIZIR SOFTENING LENS

DELTALIGHT

M20/M26H - HEDRA 93008 DIM5

23363 9315 BBR

For detailed installation instructions, please consult the manual : [23363_9XX5_HAND.pdf](#)

FINISH YOUR SPECIFICATION

LED power supplies

of Fixtures

 # of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current



300 89 48 100 LED POWER SUPPLY 48V-DC / 100W DIN

14


Dimtype: non-dimmable



300 89 48 240 LED POWER SUPPLY 48V-DC / 240W DIN

34

Dimtype: non-dimmable



21012 0230 LED POWER SUPPLY 48V-DC / 100W

14

Dimtype: non-dimmable

Cutout dimension (mm): 40




21012 0240 LED POWER SUPPLY 48V-DC / 200W

29


Dimtype: non-dimmable

Cutout dimension (mm): 40

Light altering devices



473 03 01 B VIZIR HONEYCOMB B




473 03 04 VIZIR SOFTENING LENS

DELTALIGHT

M20/M26H - HEDRA 93008 DIM5

23363 9315 BBR


Finish your product

	<u>473 01 00 B</u> VIZIR TUBE B	☐
	<u>473 01 00 FBR</u> VIZIR TUBE FBR	☐
	<u>473 01 00 FG</u> VIZIR TUBE FG	☐
	<u>473 01 00 W</u> VIZIR TUBE W	☐

COMPATIBLE COMPOSABLES

SHIFTLINE M26H + SBL

Available Colours

	<u>30411 9205</u> SHIFTLINE M26H + SBL 2m DIM5	☒ ☐
	<u>30411 9305</u> SHIFTLINE M26H + SBL 2m DIM5	☒ ☐
	<u>30412 9205</u> SHIFTLINE M26H + SBL 3m DIM5	☒ ☐
	<u>30412 9305</u> SHIFTLINE M26H + SBL 3m DIM5	☒ ☐
	<u>30413 9205</u> SHIFTLINE M26H + SBL 4m DIM5	☒ ☐
	<u>30413 9305</u> SHIFTLINE M26H + SBL 4m DIM5	☒ ☐

DELTALIGHT

M20/M26H - HEDRA 93008 DIM5

23363 9315 BBR

SHIFTLINE M26H profile		Available Colours
	23359 0000 SLM26H - PROFILE	
	23359 0010 SLM26H - PROFILE 1m	
	23359 0020 SLM26H - PROFILE 2m	
	23359 0030 SLM26H - PROFILE 3m	



SPLITLINE M20 ST profile		Available Colours
	23397 0000 SPM20 ST - PROFILE	
	23397 0020 SPM20 ST - PROFILE 2m	
	23397 0030 SPM20 ST - PROFILE 3m	

SPLITLINE M20 profile		Available Colours
	420 20 10 00 SPM20 - PROFILE 1m	
	420 20 20 00 SPM20 - PROFILE 2m	

DELTALIGHT

M20/M26H - HEDRA 93008 DIM5

23363 9315 BBR

	420 20 30 00 SPM20 - PROFILE 3m	
	23301 0000 SPM20 - PROFILE B	

Notes: