




HALOSCAN ON 1 MP 92735 DIM8

23147 9238 W-W

AVAILABLE IN
BLACK-BLACK 23147 9238 B-B
BLACK-GOLD COLORED 23147 9238 B-GC
WHITE-WHITE 23147 9238 W-W

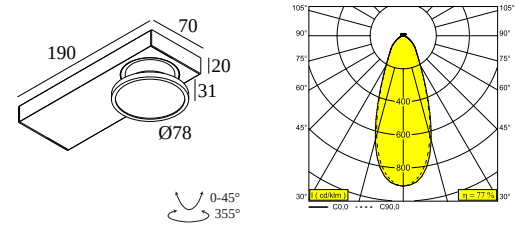

 [View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Ceiling Surface mounted
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.5
ADJUSTABILITY	0° to 45° swiveling, 355° rotatable
INFORMATION	LENS FL-35° INCL.DIMMABLE LED POWER SUPPLY 500mA-DC
Electrical info	
ELECTRICAL	220-240V / 50-60Hz
CLASS	I
POWER SUPPLY	YES
DIM TYPE	mains (phase cut-off)
ENERGY CLASS	D
CERTIFICATES	CB, ENEC, RCM
Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 8,6W / CRI>90 (R9: 60) / 2700K / 1041lm
TM-30 VALUES	rf: 89 / Rg: 100
SDCM	SDCM1
RISKGROUP	RG1
LM80	L90B10 > 50000
BEAMANGLE	35°
LED TECHNICS (LIGHT SOURCE)	1041lm // 8,6W // 121lm/W
LED TECHNICS (LUMINAIRE)	799lm // 9,9W // 81lm/W
Accessories	

HALOSCAN HONEYCOMB
HALOSCAN LINEAR SPREAD LENS
HALOSCAN KAP MP

For detailed installation instructions, please consult the manual : [23147_XXX8_HAND.pdf](#)


DELTALIGHT

HALOSCAN ON 1 MP 92735 DIM8

23147 9238 W-W


FINISH YOUR SPECIFICATION

Light altering devices




23110 0040

HALOSCAN LINEAR SPREAD LENS

☐

23110 0050 B

HALOSCAN HONEYCOMB B

☐

23110 0060 B

HALOSCAN KAP MP B

☐

23110 0060 W

HALOSCAN KAP MP W

☐

Notes: