

TAGLINE

The Tagline made-to-measure profile provides an ultra-minimalistic light line that integrates seamlessly with the architectural lines of your project. Limited to only 9mm the Tagline seems almost invisible, a slender line of light that cuts through space.

Available in different application versions - from trimless recessed to surface mounted, as a pendant solution or as perimeter lighting - Tagline is offered as a creative tool for architects and designers to accentuate architectural detail or characterise environments. Any space becomes distinctively elegant when the Tagline is used in a simple linear way, or can become very magical and unique when used in a composition.

www.deltalight.com/tagline

PRO

TAGLINE
TRW

TAGLINE
TR

TAGLINE
LEDLINE

TAGLINE
ST

TAGLINE
ON


TAGLINE
ON SUSPENDED

TAGLINE
SPY 27

GENERAL
LIGHT

ACCEN
LIGHT

A slender line of light that
cuts through space.


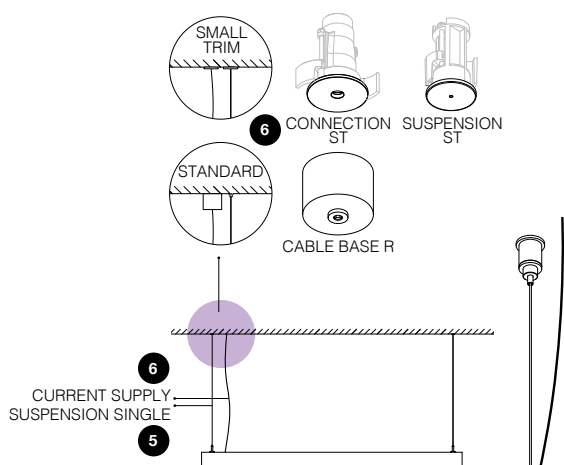


PRO

PROFILES

Go around the corner

TAGLINE

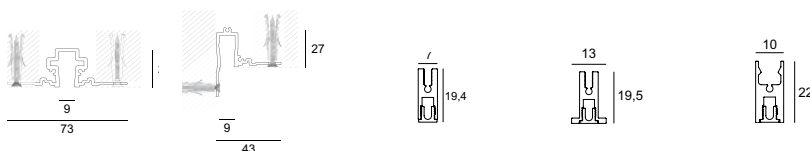

35 x (L + 4)

25 x (L + 4)

9 x (L + 4)

TAGLINE

TR

TRW

LEDLINE

ST

ON

1 PROFILE

PROFILE / m	425 01 00 00 ◇	425 02 00 00 ◇	425 03 00 00 ◇	425 05 00 00 ◇	425 04 00 00 ◇
MAX. LENGTH PER PROFILE SECTION 6m	◇ B ●	◇ B ●	◇ B ●	◇ B ● / W ○	◇ B ● / GC ● / W ○
POLYCARBONATE / m					
SANDBLASTED (SBL)	-	-	INCLUDED	INCLUDED	INCLUDED

2 DIMENSIONS

The length of each profile needs to be defined in mm and will depend on the shape and construction of the design and the light modules selected to go in to each profile section.

3 JUNCTION / CORNER

CONNECTOR 90°	425 01 06 06	-	-	425 05 06 06	425 04 06 06
CONNECTOR 90° INTERIOR	-	425 02 06 06	-	-	-
CONNECTOR 90° EXTERIOR	-	425 02 06 16	-	-	-

4 ENDCAP

ENDCAP (2 PCS.)	425 01 03 01 B	425 02 03 01 B	425 03 03 01 B	425 05 03 01 B / W	425 04 03 01 B / W
-----------------	----------------	----------------	----------------	--------------------	--------------------

5 FIXATION

RECESSED					
INSIDE CLIP (2 PCS.)	-	-	-	425 05 14 01	-
SURFACE MOUNTED					
FIXATION CLIP (2 PCS.)	-	-	-	-	425 04 06 11
SUSPENDED					
SUSPENSION SINGLE 1,6M (1 PC.)	-	-	-	-	425 09 01
SUSPENSION ST	-	-	-	-	15225 0340 B / W


6 CONNECTION

SUSPENDED					
CURRENT SUPPLY 1,6M	2X0,5MM²	-	-	-	425 97 51
CONNECTION ST		-	-	-	15225 0360 B / W
CABLE BASE R		-	-	-	203 99 55 B / W
CABLE BASE S		-	-	-	203 99 56 B / W
COVERSET R	100MM	-	-	-	204 00 100 B / W

LIGHT MODULES

SEE PAGE 417

7 LED FLEX



TAGLINE TR


SPY 27

3000K CRI>90	LED [U] 5.8W / 787lm / 350mA	IP20	30°	18717 9320 ◇
2700K CRI>90	LED [U] 5.8W / 753lm / 350mA			18717 9220 ◇
				◇ B ● / FBR ● / FG ● / GC ● / W ○



PRO

PROFILES



Dividable per
29,4mm
238 smd LED/m

8,4W/m
820lm/m

LEDFLEX

SMALL

4000K CRI > 90	IN	300 91 51 94
3000K CRI > 90	IN	300 91 51 93
2700K CRI > 90	IN	300 91 51 92

LED POWER SUPPLY 24V-DC MORE INFO TECHNICAL CHAPTER (MAX. 5M/POWERLINE)

NON DIM	24W / IP20	21012 0160	max. 2,8m
	150W / IP67	300 89 24 150	max. 17,8m
0-10V DIM (DIM1)	60W / IP20	21012 0171	max. 7,1m
	90W / IP20	21012 0181	max. 10,7m
	120W / IP20	21012 0191	max. 14,2m
	60W / IP67	21012 0101	max. 7,1m
	90W / IP67	21012 0111	max. 10,7m
	120W / IP67	21012 0121	max. 14,2m
DALI (DIM5)	60W / IP20	21012 0205	max. 7,1m
	100W / IP20	21012 0225	max. 11,9m
	60W / IP67	21012 0135	max. 7,1m
	90W / IP67	21012 0145	max. 10,7m
	120W / IP67	21012 0155	max. 14,2m

FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY

SPY 27

LED POWER SUPPLY MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT

MAINS DIM (FE) 11	21012 0298	 min. 55	R *
1-10V DIM 15	300 90 124	 min. 55	R *
DALI 14	300 90 125	 min. 55	R *
FINISH			
VISOR 27	216 12 01		A

* REMOTE INSTALLATION