


Enkel geschikt voor toestellen op zeer lage spanning (minder dan 50 V-AC / 120 V-DC)
Convient uniquement pour les produits à très basse tension (moins de 50 V-AC / 120 V-DC)
Geeignet für Güter mit sehr niedriger Spannung (unter 50 V-AC / 120 V-DC)
Only suited for goods at very low voltage (below 50 V-AC / 120 V-DC)
Se recomienda únicamente para aquellos productos de tensión muy baja (menos de 50 V-AC / 120 V-DC)
Vale unicamente per i prodotti a tensione molto bassa (inferiore a 50 V-AC / 120 V-DC)

Not compatible with Class I devices and not with other companies Class III devices


IP20
Beschermd tegen vaste voorwerpen die groter zijn dan 12 mm
Protégé contre les objets solides de plus de 12 mm
Geschützt gegen Festkörper größer als 12 mm
Protected against solid objects greater than 12 mm
Protegido contra objetos sólidos superiores a 12 mm
Protetto contro oggetti solidi più grandi di 12 mm

Install suitable means for overload and short-circuit protection according to local installation requirements. (IEC 60364-7-715)

SPM20 - PROFILE

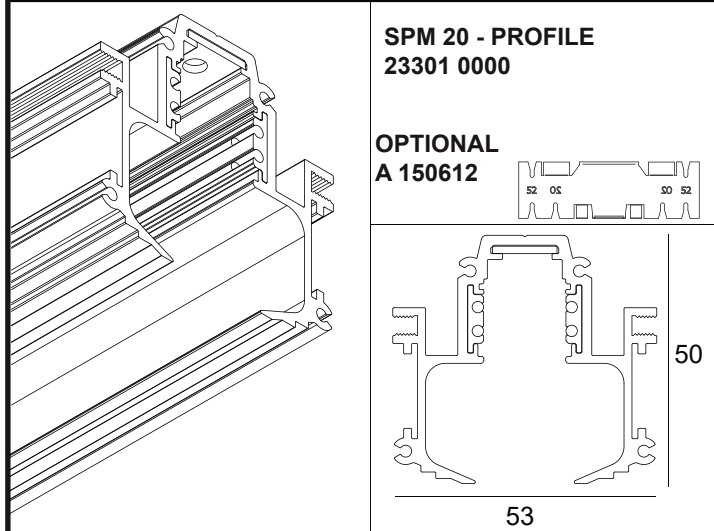

48V-DC (2 conductors)
MAX. 200W, MAX 50M
2 DIM conductors (for individual dimming)
DALI dimmable luminaires on request


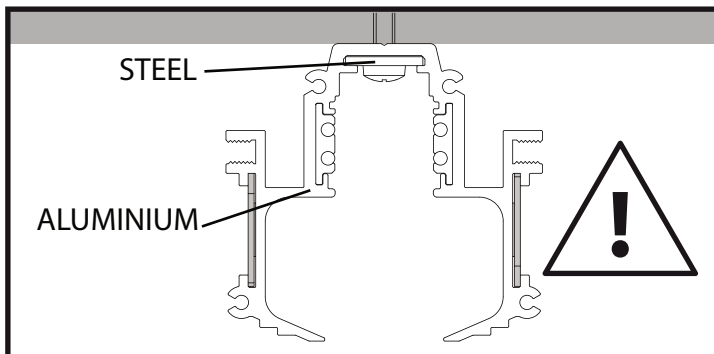


SPLITLINE M20 PROFILE



DEEL
PARTIE
TEIL
PART
PARTE
PARTE

A


TRACK CUTTING TOOL

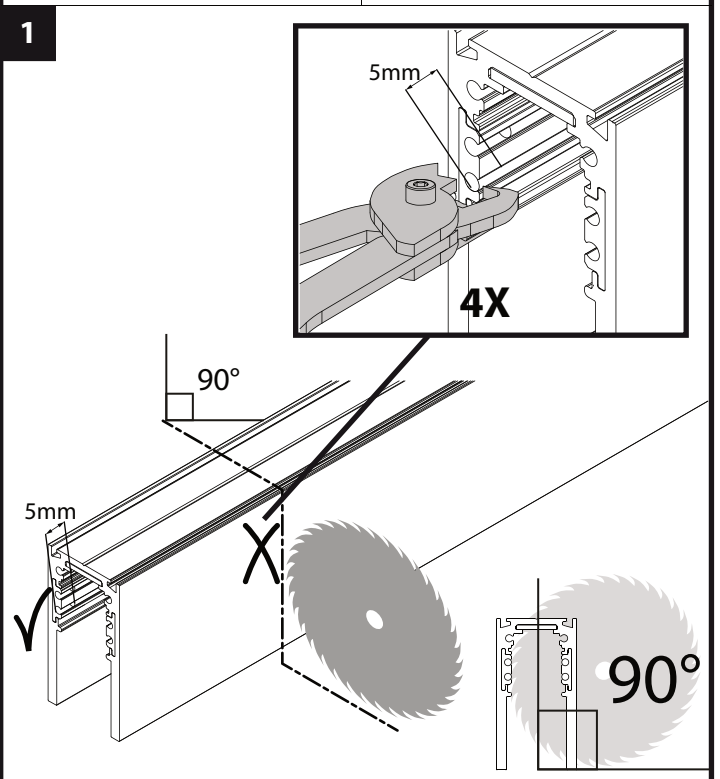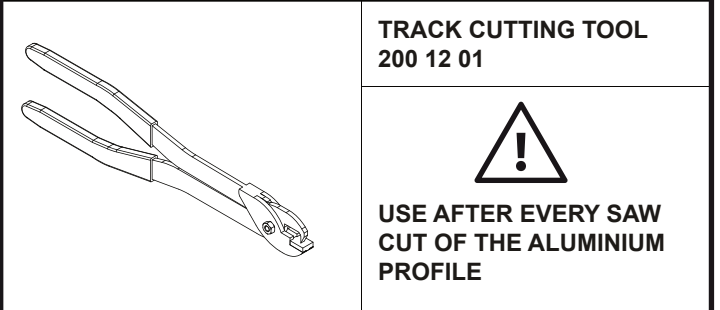


SPM CORNER 180°

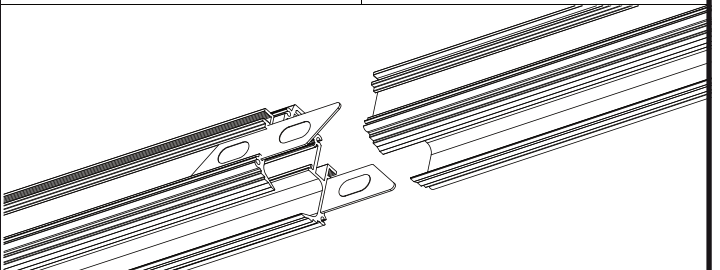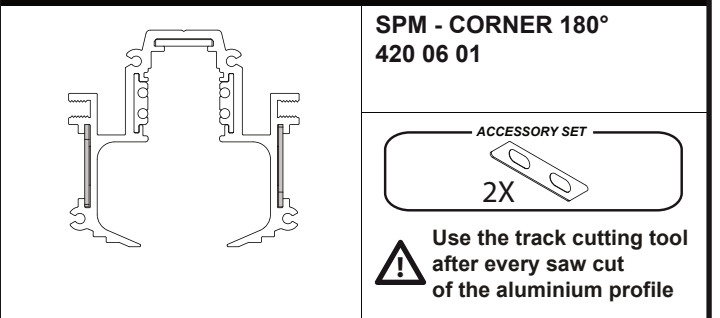

SPM20 CORNER SET 90°




SPM20 - CORNER SET 90°
420 20 06 06




 Use the track cutting tool after every saw cut of the aluminium profile


1

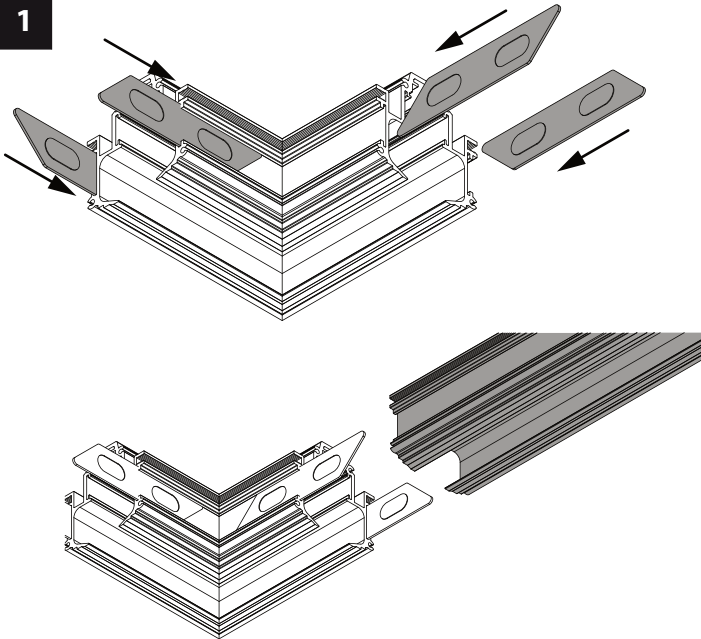

SPM20 CORNER SET V90°




SPM20 - CORNER SET 90°
420 20 06 17




 Use the track cutting tool after every saw cut of the aluminium profile


1

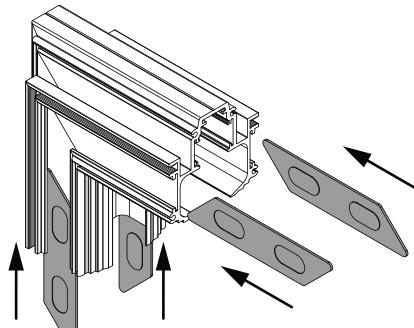

2

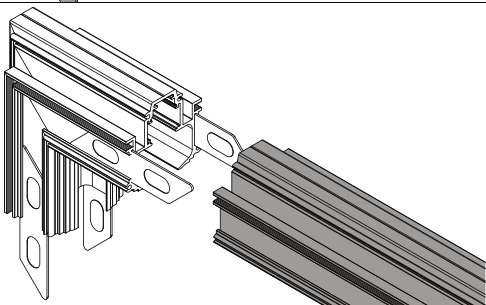

SPM20 CORNER SET 90°




SPM20 - CORNER SET R 90°
23301 0690




FIXATION

POSITION FOR INSTALLATION

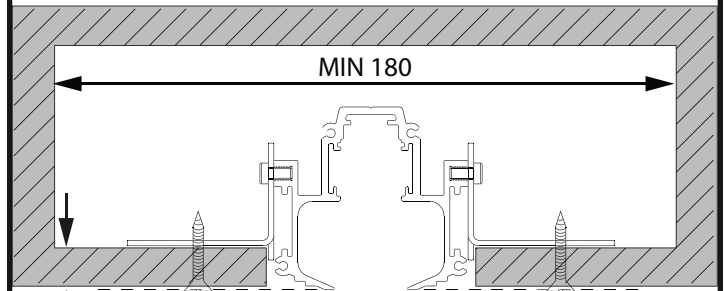


MAX. 25
MIN. 8


1


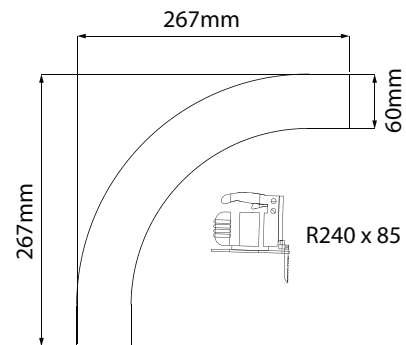


2

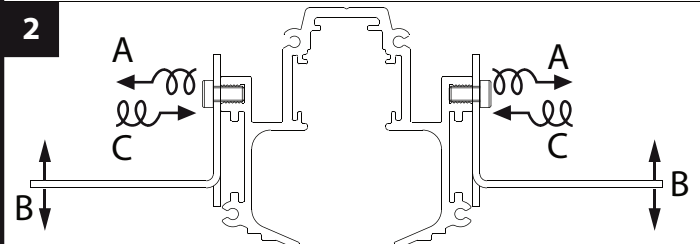


3

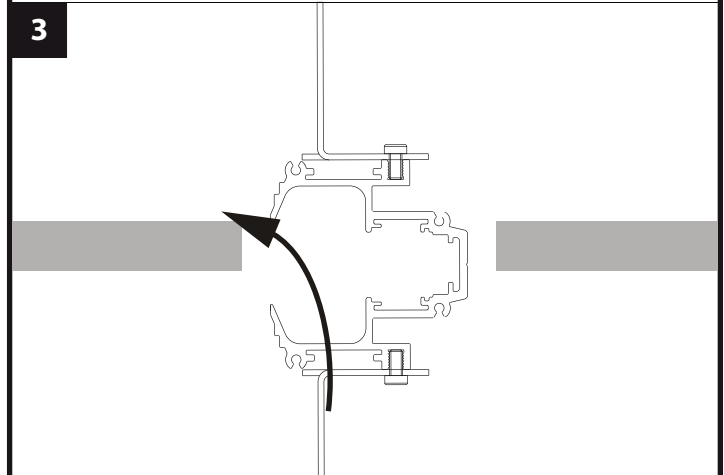

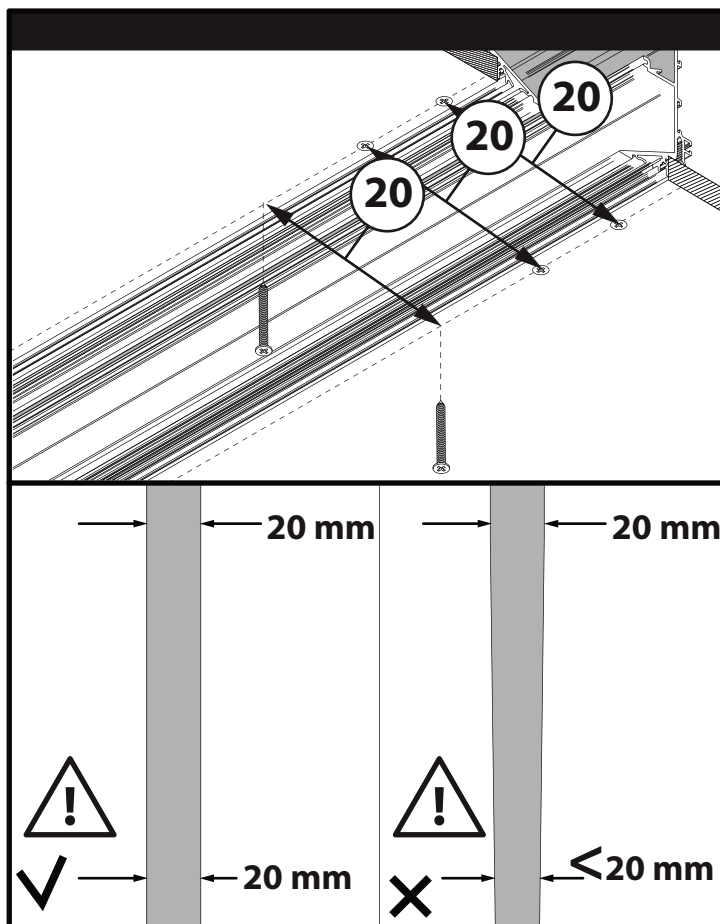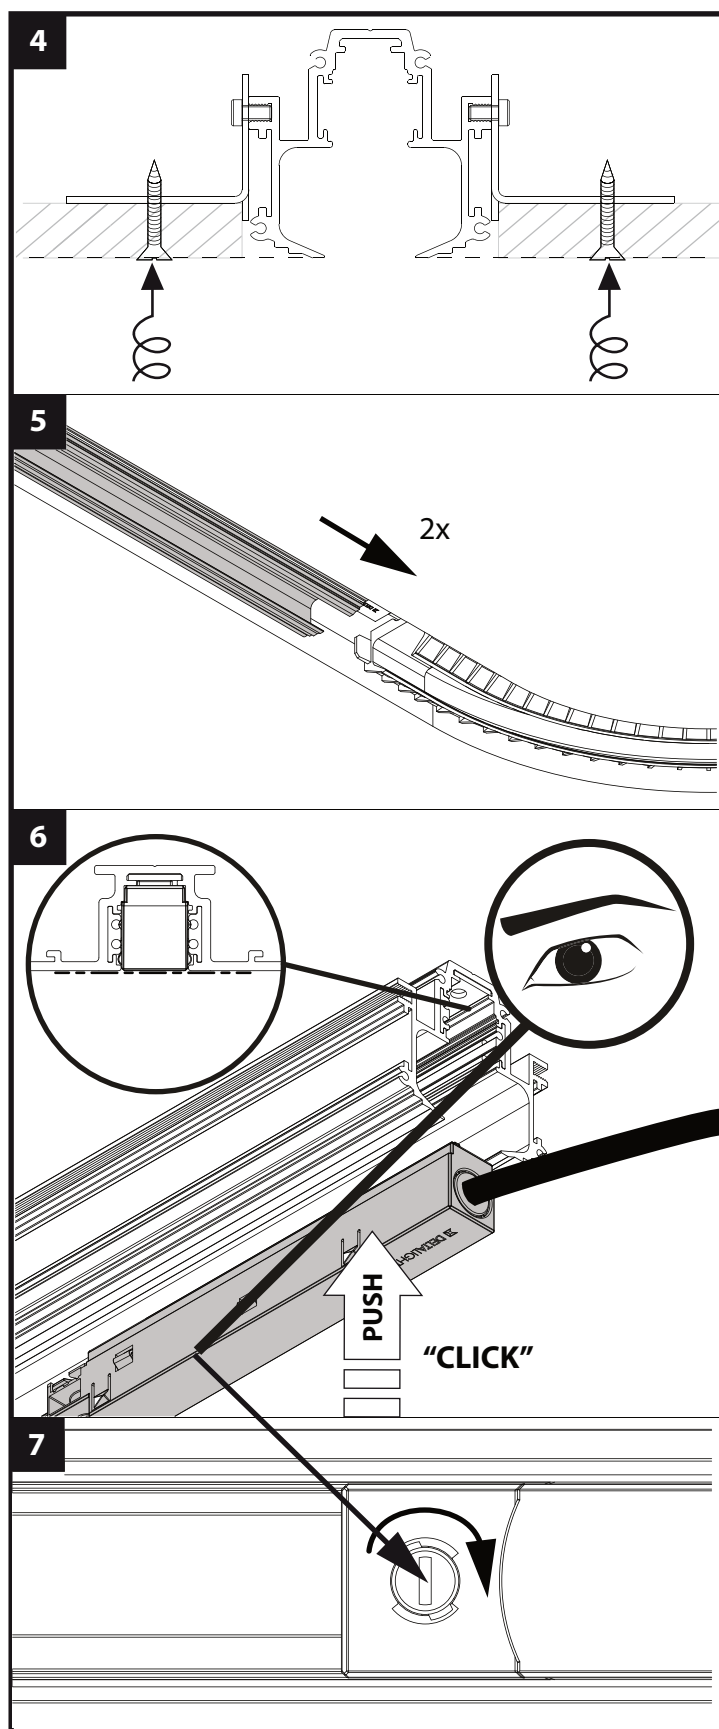

PLASTER AND PAINT

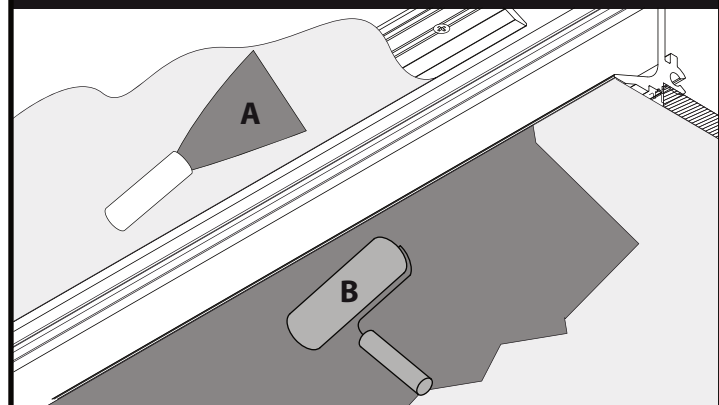

MORE INFO FOR CEILING FINISHING









<https://www.deltalight.com/downloads/CeilingFinishing.pdf>




SCAN ME

SPM20 - CORNER SET - T


SPM20 - CORNER SET - T
23302 0010

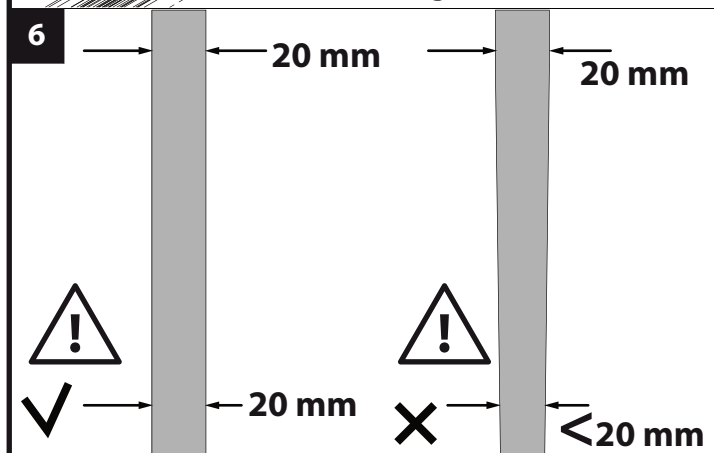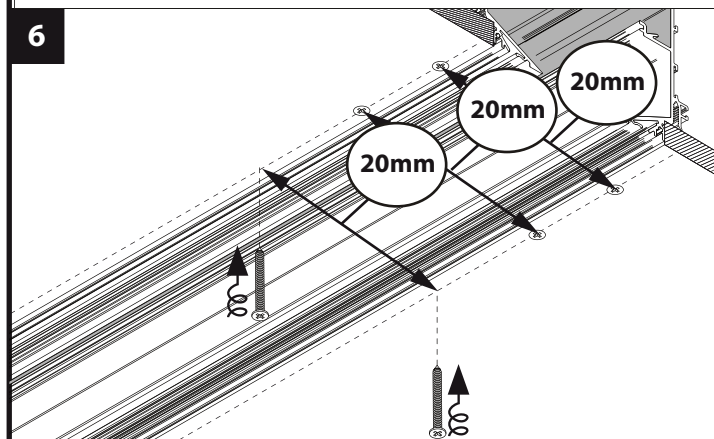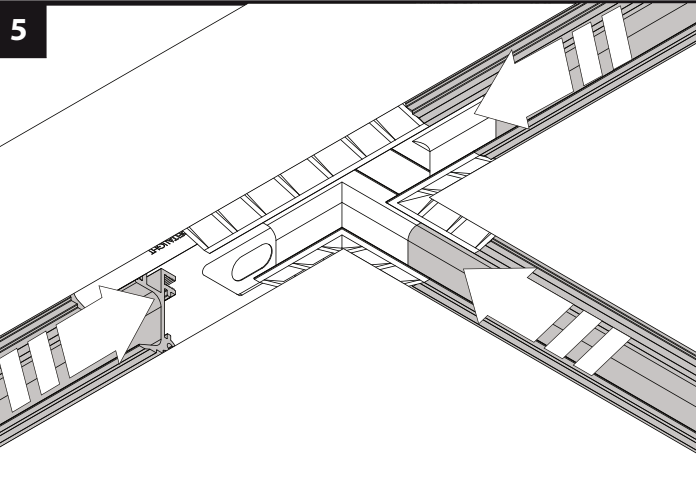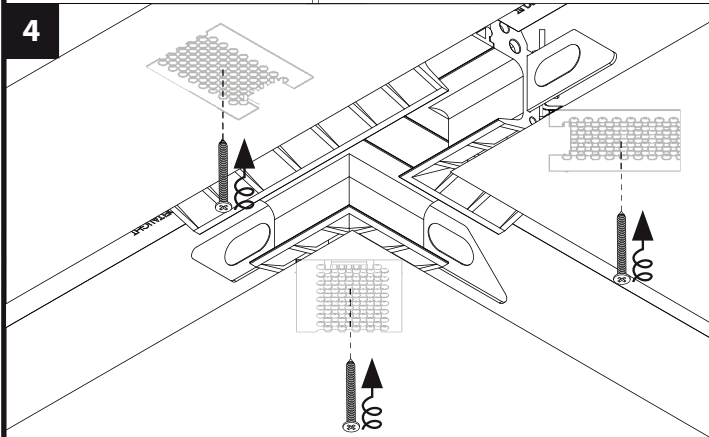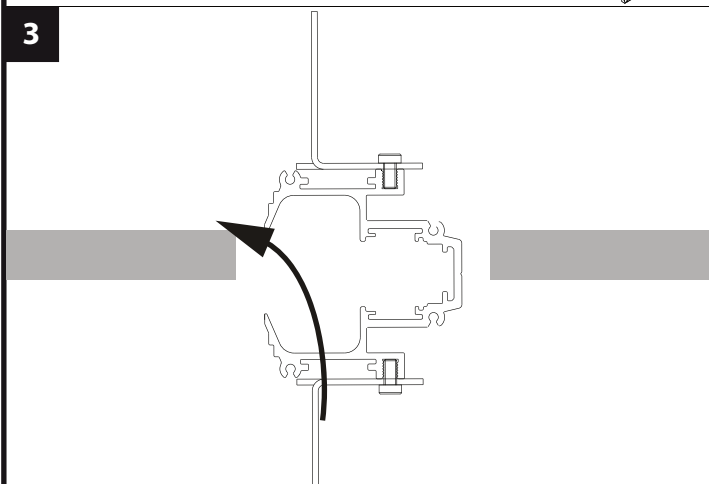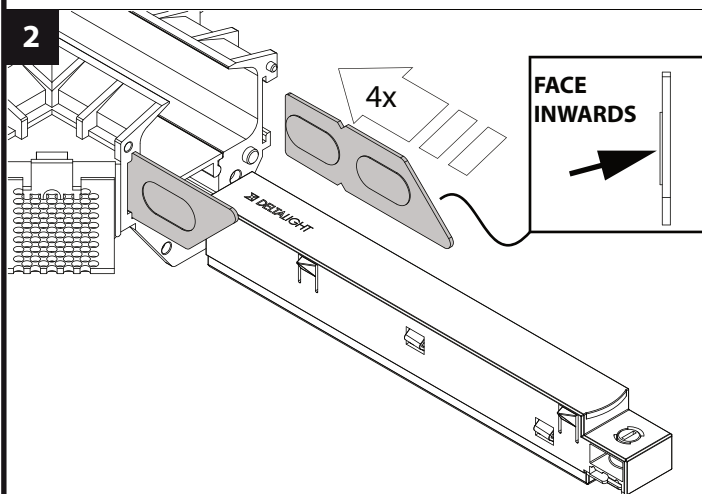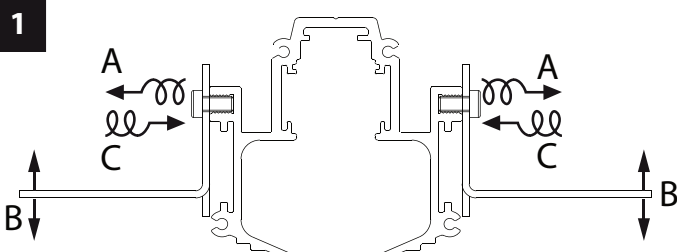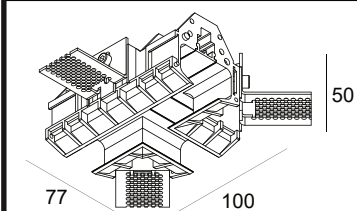

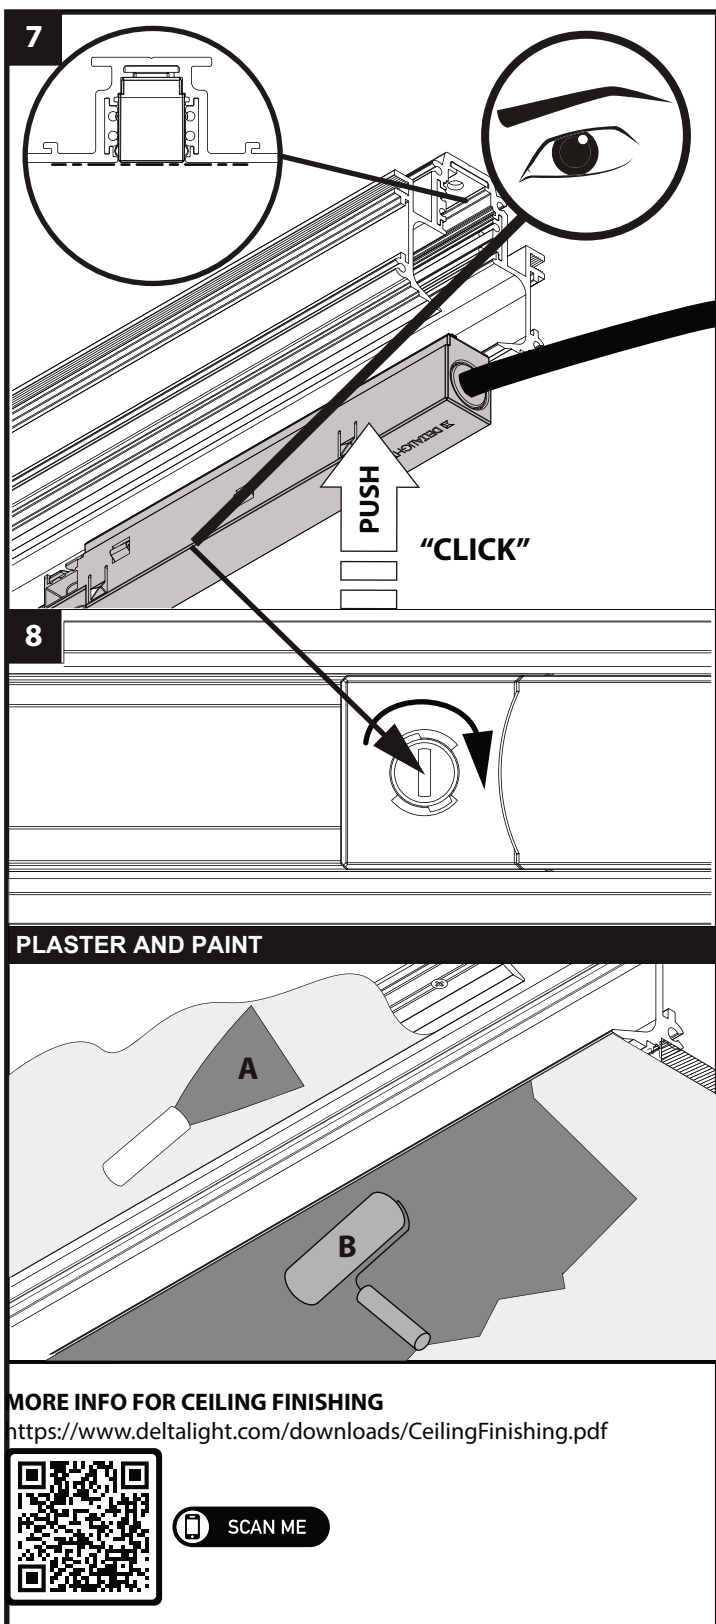


SPM20 - CORNER SET - X


SPM20 - CORNER SET - X
23302 0020




1

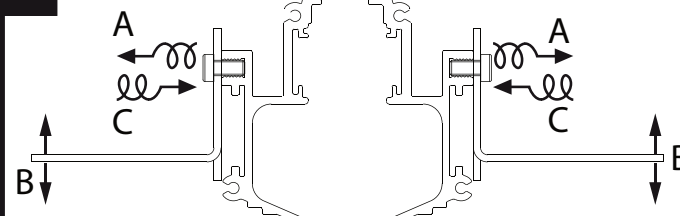

2

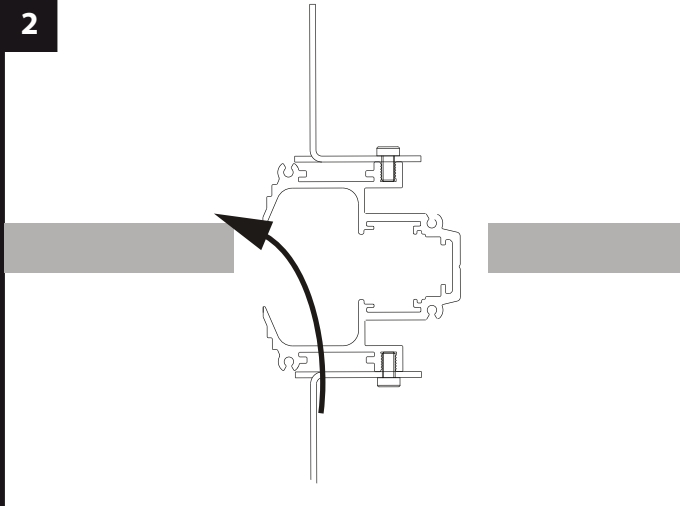

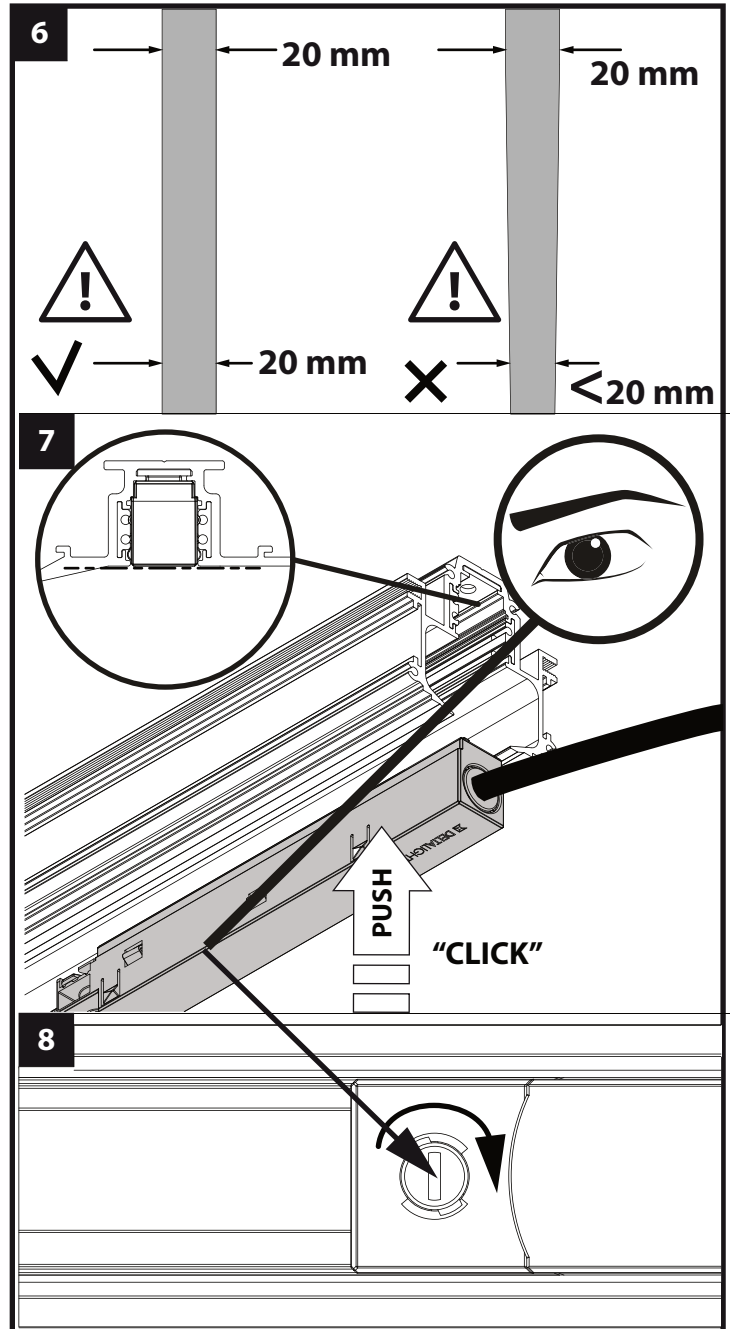


The diagram shows a road layout with two accident points, A and B. Point A is located on a road with a speed limit of 20 km/h, indicated by a '20' in a circle. Point B is located on a road with a speed limit of 50 km/h, indicated by a '50' in a circle. The roads are separated by a grassy area. The diagram is used to illustrate the concept of 'accident hotspots' and the need for targeted safety measures.

<https://www.deltalight.com/downloads/CeilingFinishing.pdf>




SPM20 - CORNER SET - R 45° S

SPM20 - CORNER SET - R 45° S
23302 0030




FIXATION


1




2

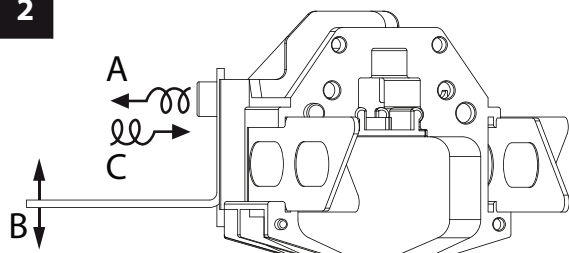


3

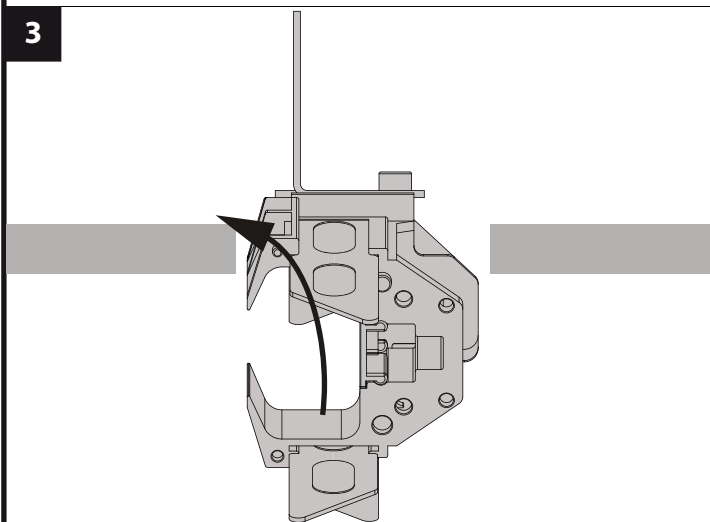


4

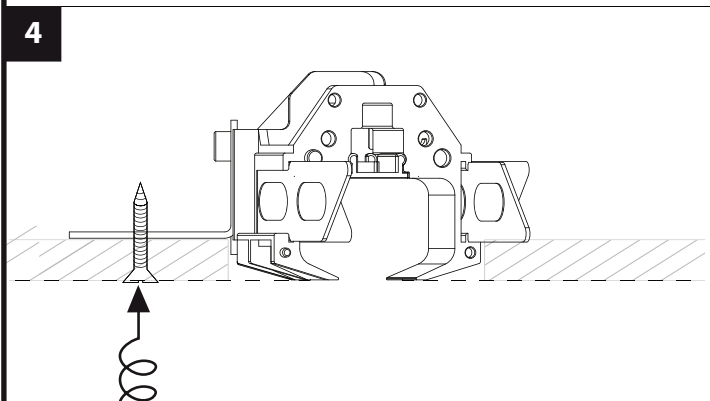


5

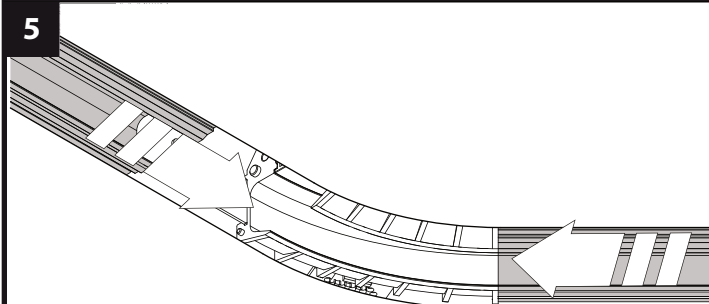


6

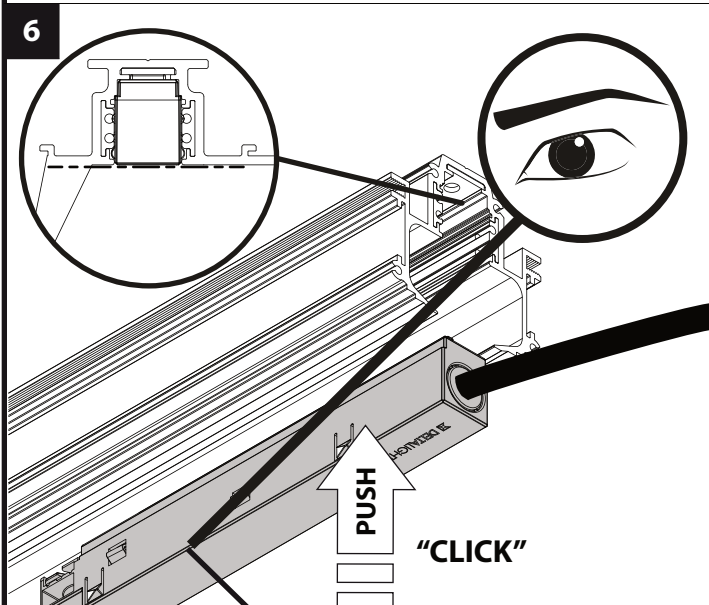

7

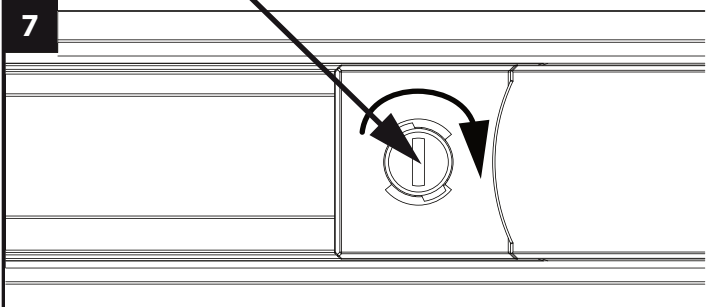

PLASTER AND PAINT

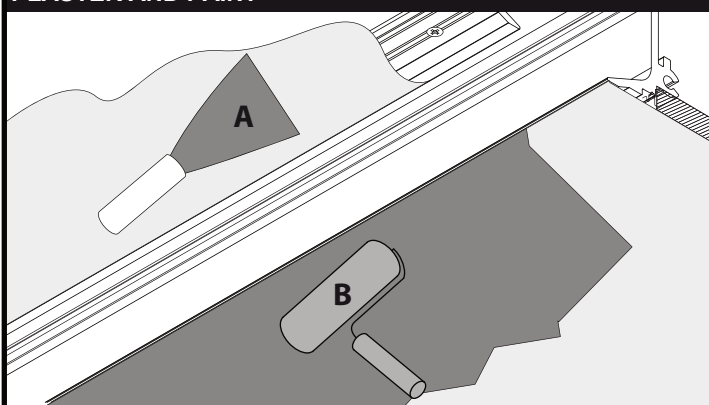


MORE INFO FOR CEILING FINISHING

<https://www.deltalight.com/downloads/CeilingFinishing.pdf>



SPM20 - CORNER SET - R 90° S



129

SPM20 - CORNER SET - R 90° S
23302 0040


ACCESSORY SET




DIN911/3
1x

FIXATION


1

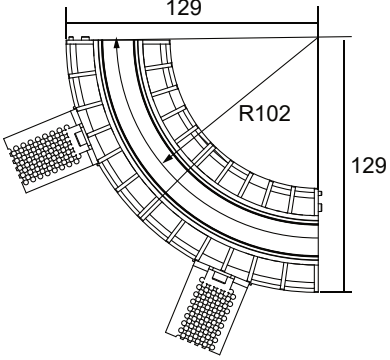


2

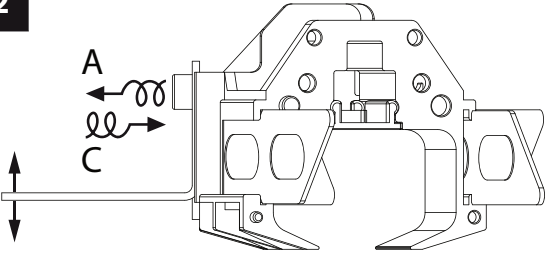


3

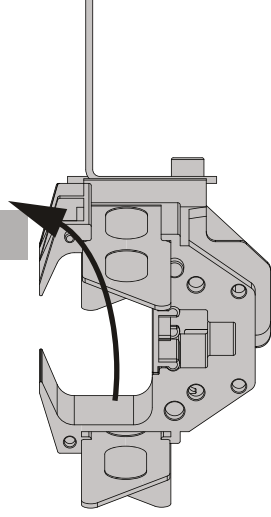


4

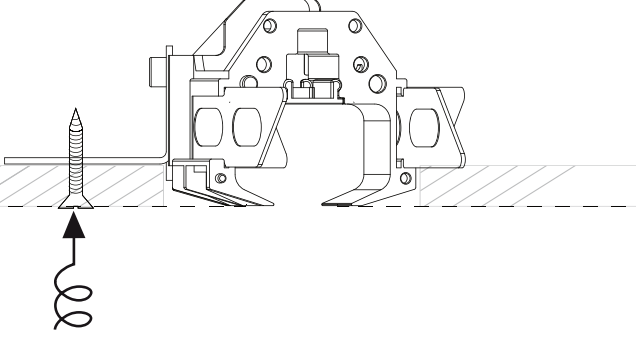

5

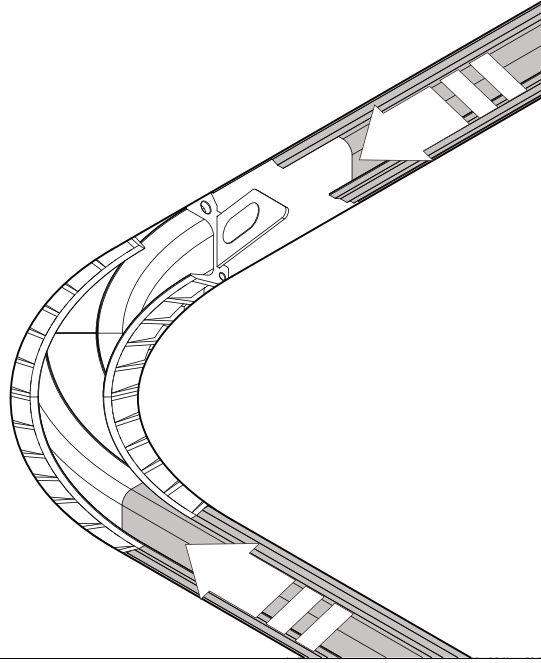


6

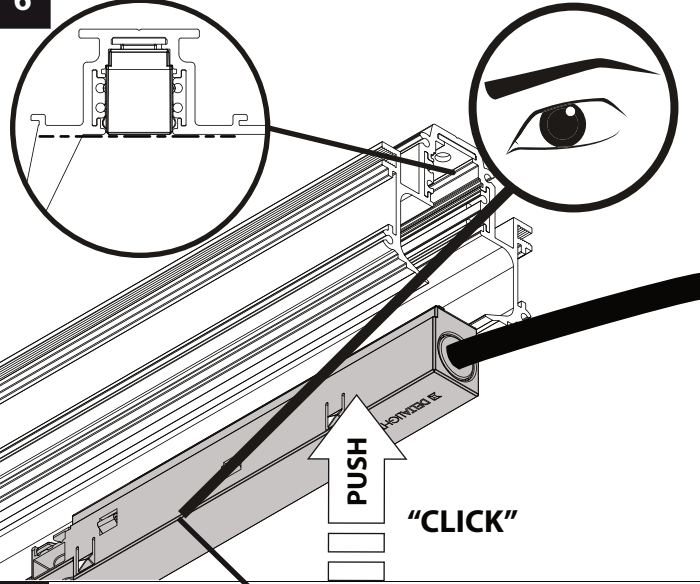


PUSH
"CLICK"

7

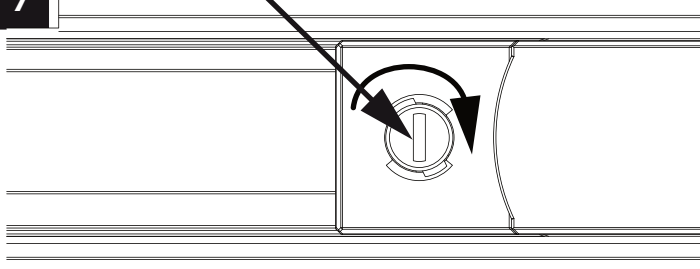

PLASTER AND PAINT

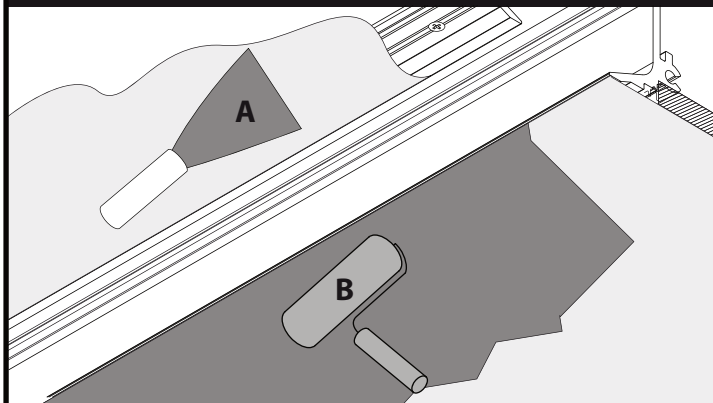

MORE INFO FOR CEILING FINISHING

<https://www.deltalight.com/downloads/CeilingFinishing.pdf>




 SCAN ME

SPM20 - FIXATION SET

SPM20 - FIXATION SET
420 20 14 01


ACCESSORY SET

2x  / 1000mm

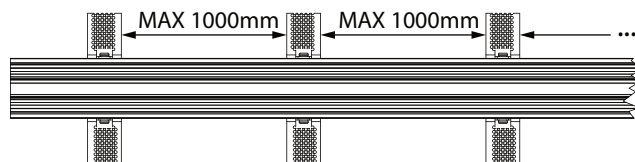


FIXATION


POSITION FOR INSTALLATION

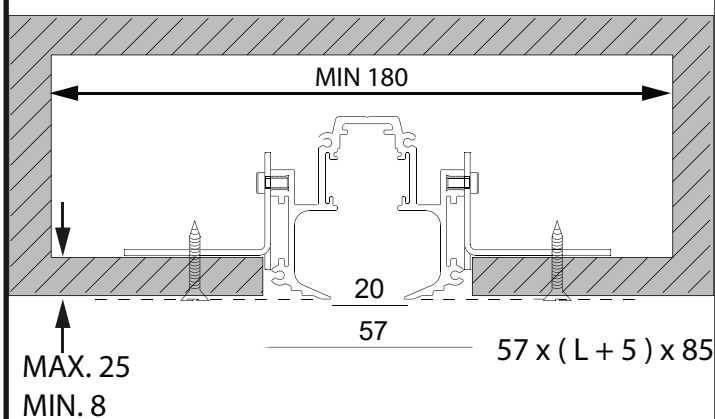


1 57 x (L + 5) x 85 mm




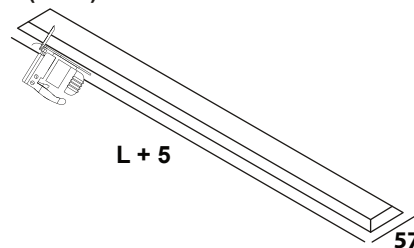


2

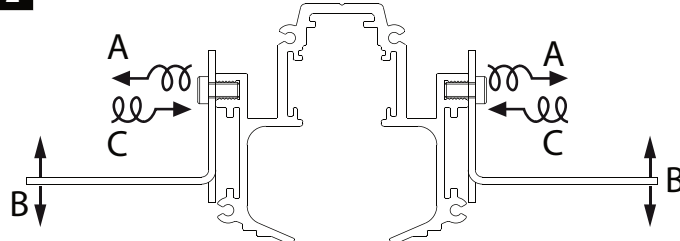

3

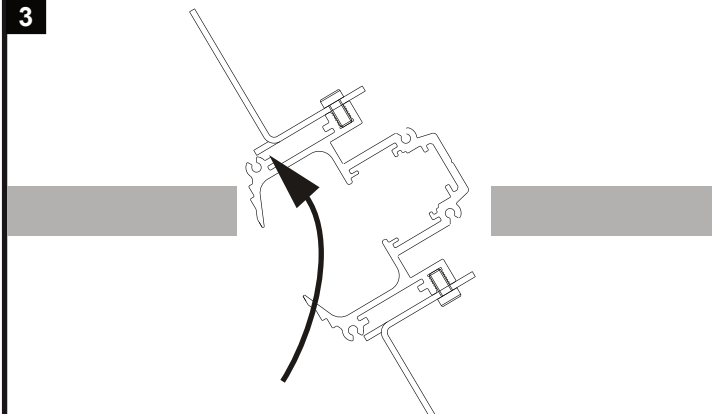

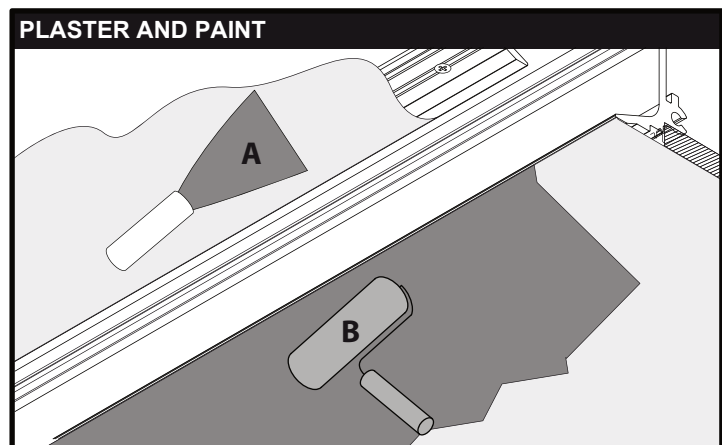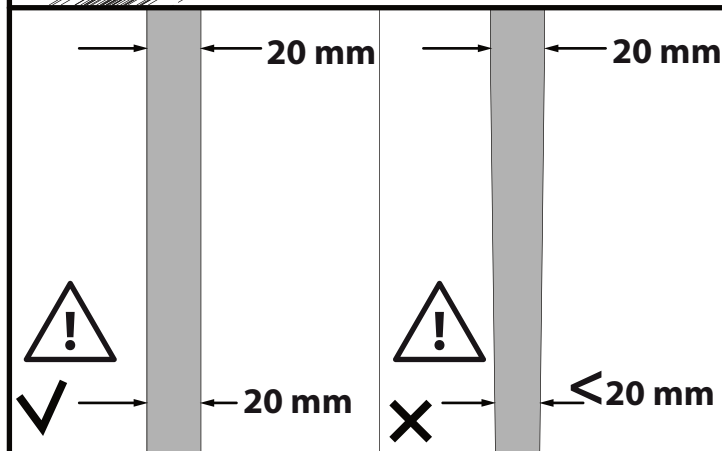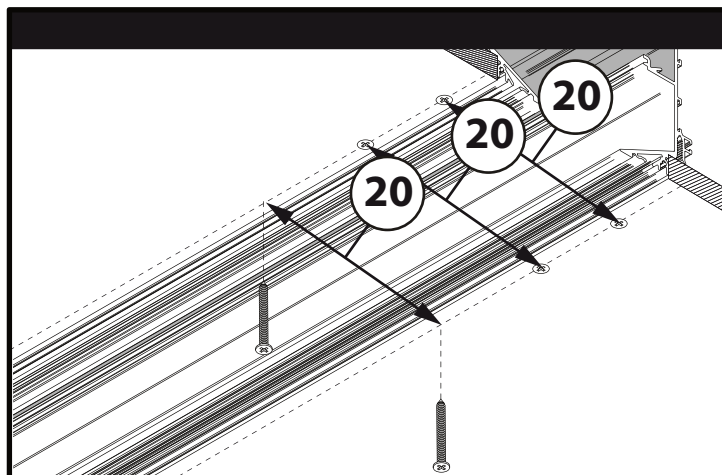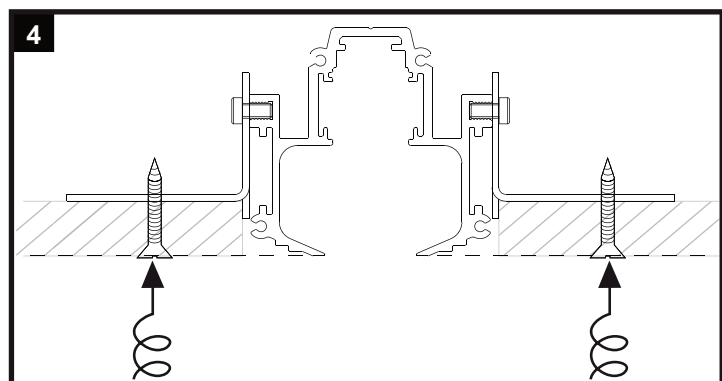


MORE INFO FOR CEILING FINISHING

<https://www.deltalight.com/downloads/CeilingFinishing.pdf>



SPM - SUPPLY 48V





SPM - SUPPLY 48V
420 99 03











48V-DC


MAX. 200W / CIRCUIT
MAX. 50M


DA1 & DA2 : DALI
CHANNELS FOR ED5 MODULES

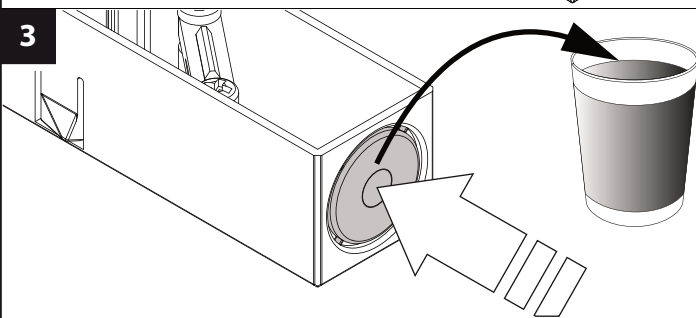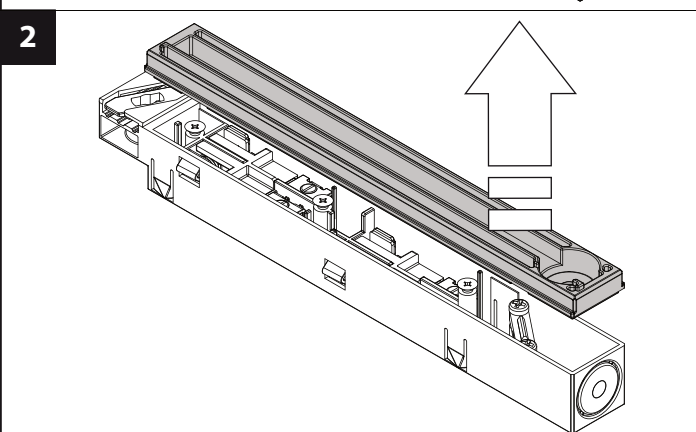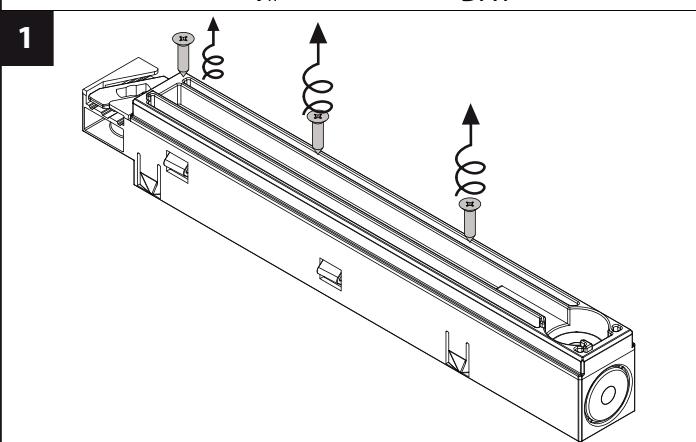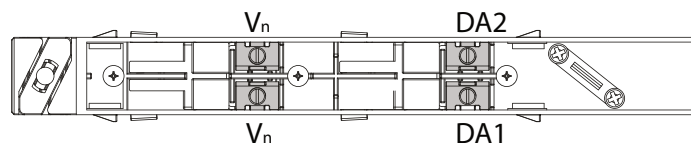

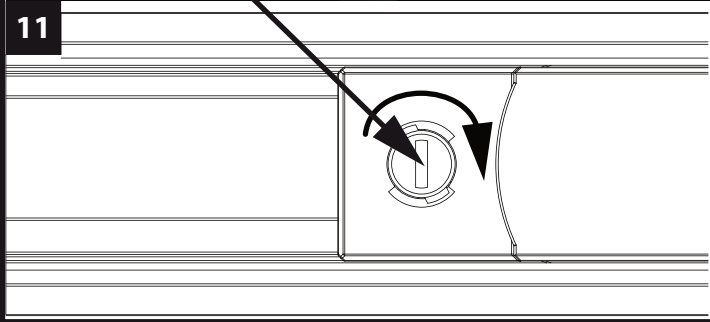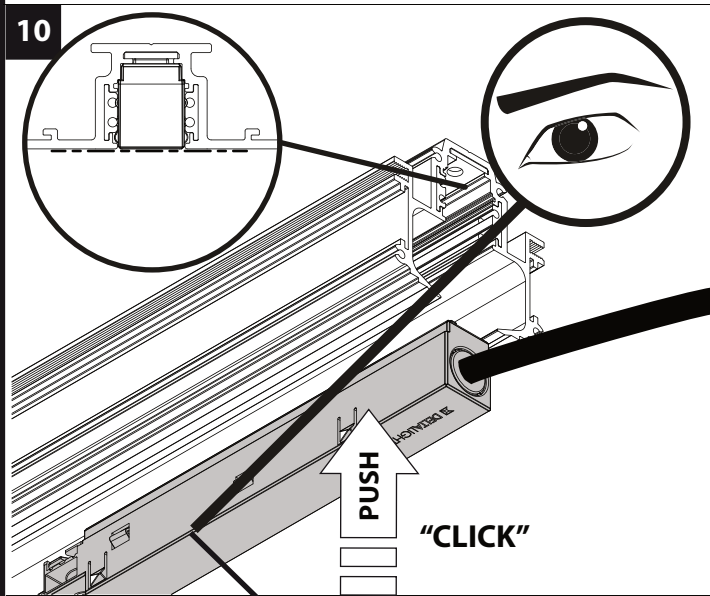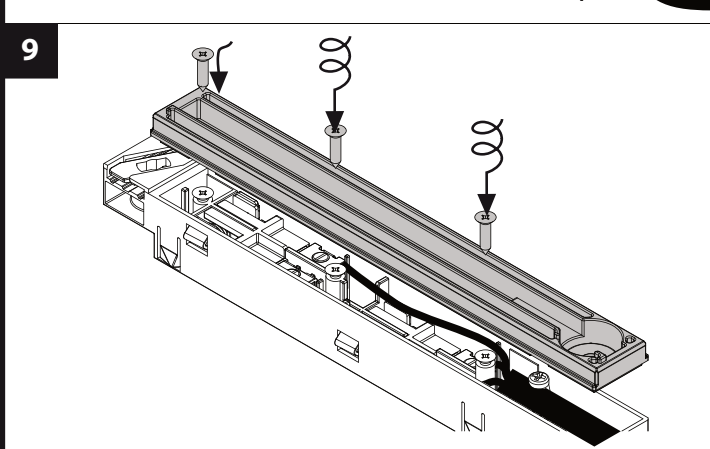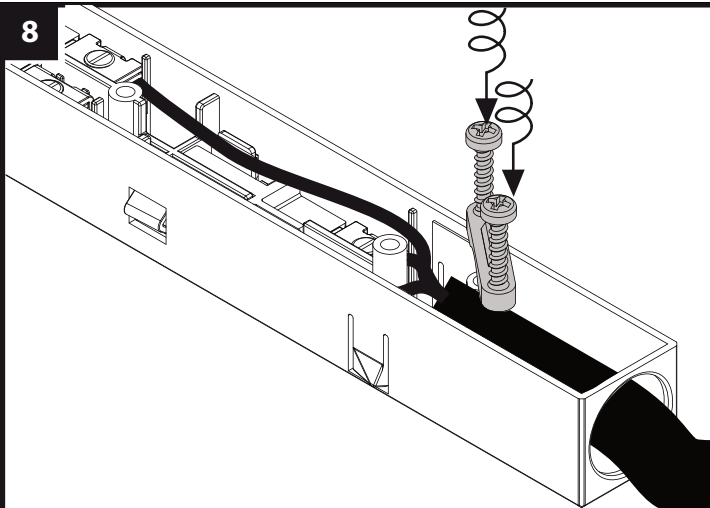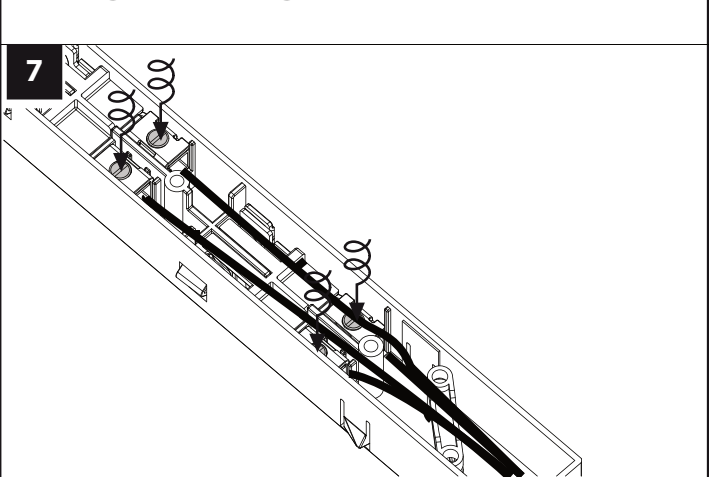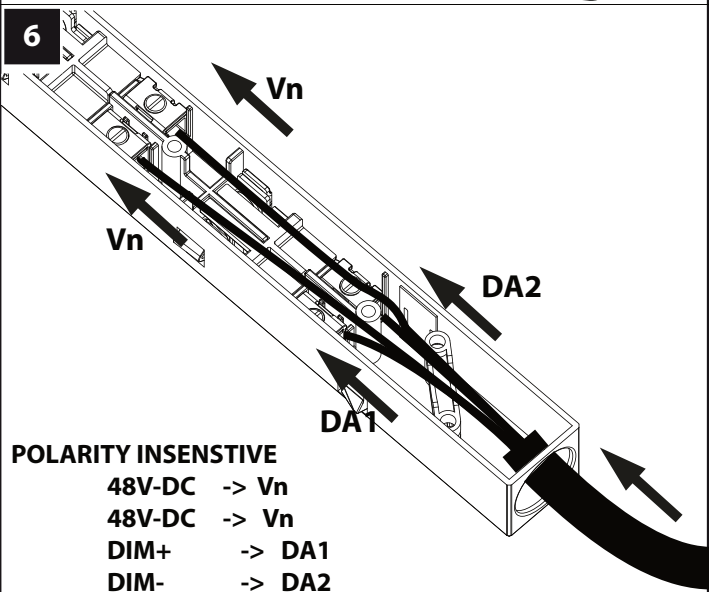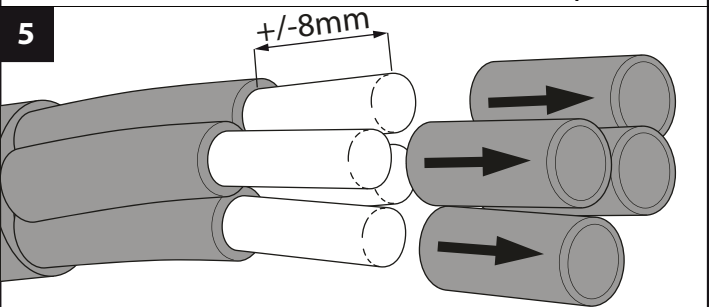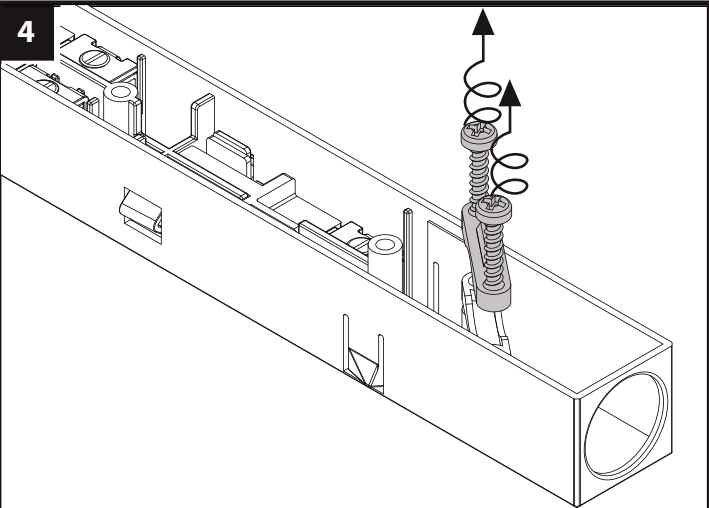

SPM - CONNECTOR 48V - 180°


	SPM - CONNECTOR 48V - 180° 420 99 01
	48V-DC MAX. 200W MAX. 50M

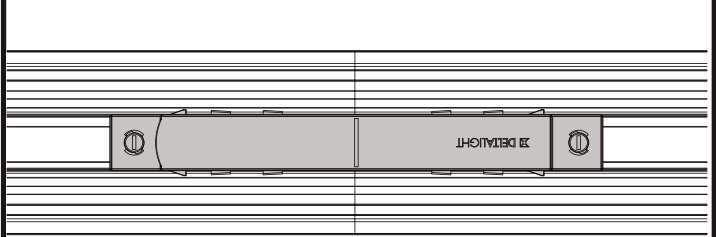


**CAUTION**

TO REDUCE THE RISK OF
OVERHEATING AND FIRE,
DO NOT BRIDGE CONDUCTORS


1

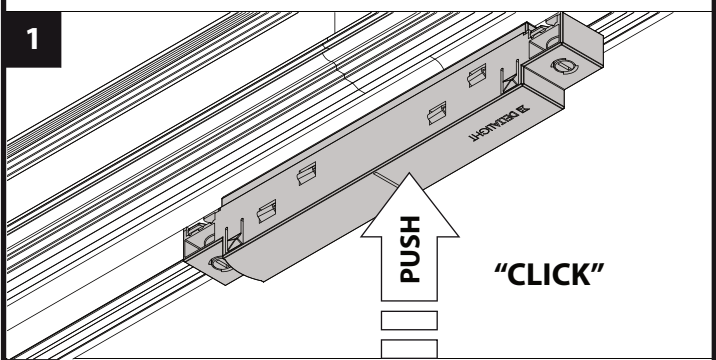


2

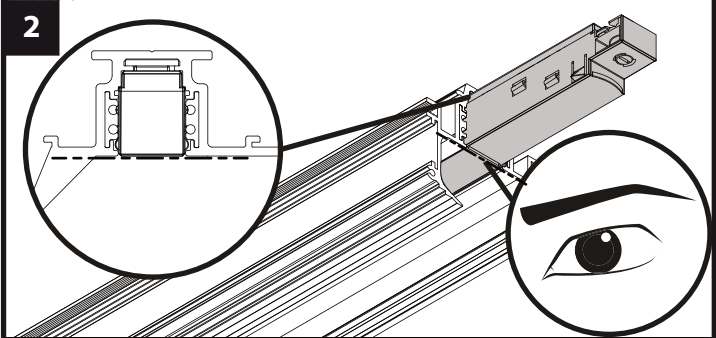

3

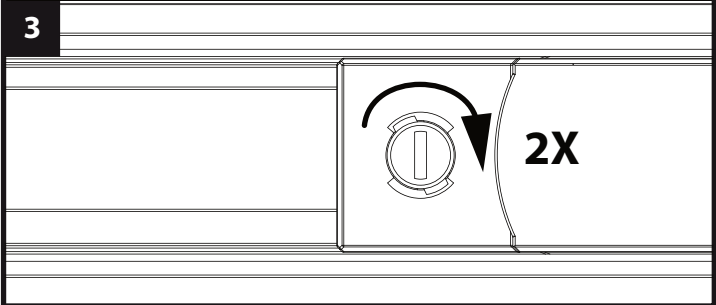


SPM - CONNECTOR 48V - 0-180°


	SPM - CONNECTOR 48V - 0-180° 420 99 02
	48V-DC MAX. 200W MAX. 50M

**CAUTION**


TO REDUCE THE RISK OF
OVERHEATING AND FIRE,
DO NOT BRIDGE CONDUCTORS

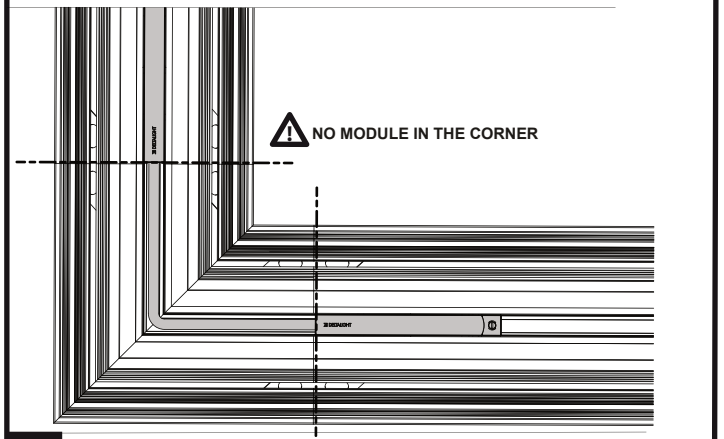


1

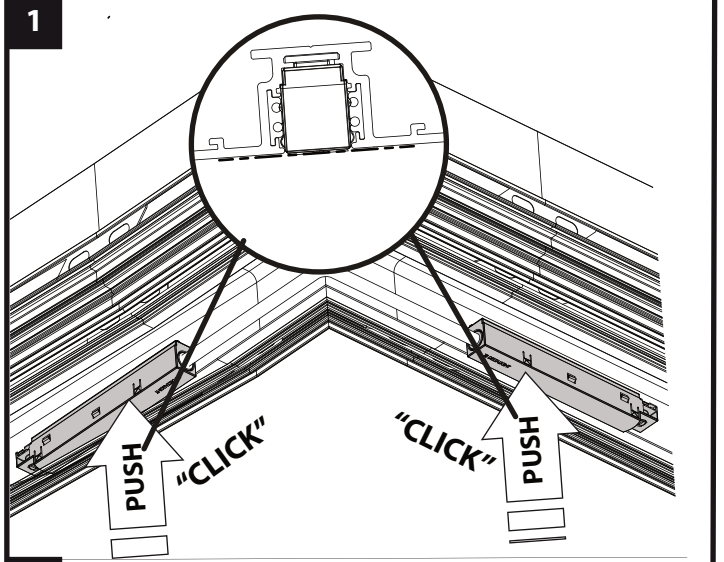

2

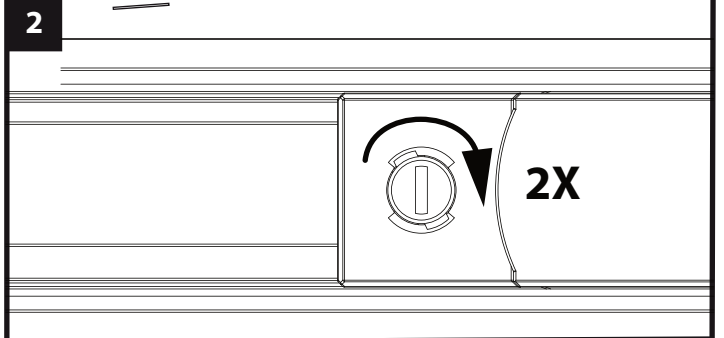

SPM20 - END CAP	
	SPM20 - END CAP 420 20 03 01
ACCESSORY SET 4X 	

