



COMPO M 92710

9 15727 9210 B


AVAILABLE IN

SCHWARZ 9 15727 9210 B

CHROM 9 15727 9210 C

DUNKLES CHROM 9 15727 9210 DC

WEISS 9 15727 9210 W

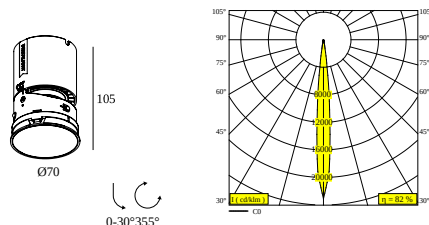

[View on website](#)



General info

LOCATION	innenbereich
INSTALLATION	Decke Einbau
CUTOUT SHAPE/SIZE (MM)	rund - 110
RECESSED DEPTH (MM)	105
THICKNESS OF MOUNTING SURFACE (MM)	max.25
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.256
ADJUSTABILITY	0° to 30° schwenkbar, 355° drehbar
INFORMATION	Accessories are not applicable with Super Spot except Honeycomb Single use B Super spot with Dali Dim max current rating 1750mA

Electrical info

CLASS	III
DIM TYPE	Abhängig von der Art der externen Stromversorgung
ENERGY CLASS	G

Lightsource info

LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 4,6-5,7W / CRI>90 / 2700K / 347-389lm
TM-30 VALUES	rf: 89 / Rg: 100
BEAMANGLE	10°
LED TECHNICS (LIGHT SOURCE)	389lm // 5,7W // 68lm/W
LED TECHNICS (LUMINAIRE)	318lm // 6,6W // 49lm/W

Requirements

LED POWER SUPPLY 700 mA - DC

Accessories

COMPO M HONEYCOMB SINGLE USE B
COMPO M LINEAR SPREAD LENS
COMPO M SPREAD LENS
COMPO M SOFTENING LENS
COMPO M GLASS SBL

For detailed installation instructions, please consult the manual : [9 15727 XXX0 HAND.pdf](#)

DELTALIGHT

COMPO M 92710

9 15727 9210 B

CEILING COMPATIBILITY

Ceiling Type	Mounting Kit	
	 15710 0020 - MOUNTING KIT COMPO M TRIM	Required
	 15710 0050 - MOUNTING KIT COMPO M TRIMLESS	Required
	 15710 0020 - MOUNTING KIT COMPO M TRIM	Required
	 15710 0050 - MOUNTING KIT COMPO M TRIMLESS	Required
	 15710 0020 - MOUNTING KIT COMPO M TRIM	Required
	 15710 0050 - MOUNTING KIT COMPO M TRIMLESS	Required

FINISH YOUR SPECIFICATION

LED Netzteil

of Fixtures



of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current

15710 3100	LED POWER SUPPLY 18W NO DIM 1400mA	1->4	
15710 3500	LED POWER SUPPLY MULTIPOWER 15W NO DIM 700mA	1	
15710 4000	LED POWER SUPPLY MULTIPOWER 15W DIM8 700mA	1	
15710 4900	LED POWER SUPPLY MULTIPOWER 20W DIM1 700mA	1	
15710 5000	LED POWER SUPPLY MULTIPOWER 55W DALI DT6 1400mA	1->13	
Dimtype: DALI			
15710 5600	LED POWER SUPPLY MULTIPOWER 20W DALI DT6 700mA	1	
Dimtype: DALI			

Mounting Kit



15710 0020 B MOUNTING KIT COMPO M TRIM B

Cutout dimension (mm): 76

15710 0020 W MOUNTING KIT COMPO M TRIM W

DELTALIGHT

COMPO M 92710

9 15727 9210 B



15710 0050 MOUNTING KIT COMPO M TRIMLESS

☐

Cutout dimension (mm): 76

Licht veredelndes Zubehör

15710 1100 B COMPO M HONEYCOMB SINGLE USE B

☐

15710 1110 COMPO M LINEAR SPREAD LENS

☐

Cutout dimension (mm): 32,5

15710 1120 COMPO M SPREAD LENS

☐

Cutout dimension (mm): 32,5

15710 1130 COMPO M SOFTENING LENS

☐

Cutout dimension (mm): 32,5

15710 1140 COMPO M GLASS SBL

☐

Cutout dimension (mm): 32,5

Notes: