



COMPO M 92710

9 15727 9210 B


AVAILABLE IN

NEGRO 9 15727 9210 B

CHROMO 9 15727 9210 C

CHROMO OSCURO 9 15727 9210 DC

BLANCO 9 15727 9210 W

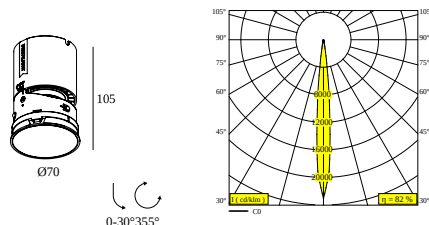

[View on website](#)



General info	
LOCATION	interior
INSTALLATION	Techo Empotrado
CUTOUT SHAPE/SIZE (MM)	redondo - 110
RECESSED DEPTH (MM)	105
THICKNESS OF MOUNTING SURFACE (MM)	max.25
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.256
ADJUSTABILITY	0° to 30° giratorio, 355° orientable
INFORMATION	Accessories are not applicable with Super Spot except Honeycomb Single use B Super spot with Dali Dim max current rating 1750mA

Electrical info	
CLASS	III
DIM TYPE	dependiendo del tipo de fuente de alimentación externa
ENERGY CLASS	G

Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 4,6-5,7W / CRI>90 / 2700K / 347-389lm
TM-30 VALUES	rf: 89 / Rg: 100
BEAMANGLE	10°
LED TECHNICS (LIGHT SOURCE)	389lm // 5,7W // 68lm/W
LED TECHNICS (LUMINAIRE)	318lm // 6,6W // 49lm/W

Requirements	
LED POWER SUPPLY 700 mA - DC	

Accessories	
COMPO M HONEYCOMB SINGLE USE B	
COMPO M LINEAR SPREAD LENS	
COMPO M SPREAD LENS	
COMPO M SOFTENING LENS	
COMPO M GLASS SBL	

For detailed installation instructions, please consult the manual : [9 15727 XXX0 HAND.pdf](#)

CEILING COMPATIBILITY

Ceiling Type	Mounting Kit	
	 15710 0020 - MOUNTING KIT COMPO M TRIM	Required
	 15710 0050 - MOUNTING KIT COMPO M TRIMLESS	Required
	 15710 0020 - MOUNTING KIT COMPO M TRIM	Required
	 15710 0050 - MOUNTING KIT COMPO M TRIMLESS	Required
	 15710 0020 - MOUNTING KIT COMPO M TRIM	Required
	 15710 0050 - MOUNTING KIT COMPO M TRIMLESS	Required

FINISH YOUR SPECIFICATION

Fuente de alimentación LED		# of Fixtures
 # of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the ' ' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.		Min current Max current
15710 3100	LED POWER SUPPLY 18W NO DIM 1400mA	1->4
15710 3500	LED POWER SUPPLY MULTIPOWER 15W NO DIM 700mA	1
15710 4000	LED POWER SUPPLY MULTIPOWER 15W DIM8 700mA	1
15710 4900	LED POWER SUPPLY MULTIPOWER 20W DIM1 700mA	1
15710 5000	LED POWER SUPPLY MULTIPOWER 55W DALI DT6 1400mA	1->13
Dimtype: con DALI		
15710 5600	LED POWER SUPPLY MULTIPOWER 20W DALI DT6 700mA	1
Dimtype: con DALI		

Mounting Kit	
	15710 0020 B MOUNTING KIT COMPO M TRIM B
Cutout dimension (mm): 76	
	15710 0020 W MOUNTING KIT COMPO M TRIM W

COMPO M 92710

9 15727 9210 B



15710 0050 MOUNTING KIT COMPO M TRIMLESS

☐

Cutout dimension (mm): 76

Dispositivos de modificación de Luz

15710 1100 B COMPO M HONEYCOMB SINGLE USE B

☐

15710 1110 COMPO M LINEAR SPREAD LENS

☐

Cutout dimension (mm): 32,5

15710 1120 COMPO M SPREAD LENS

☐

Cutout dimension (mm): 32,5

15710 1130 COMPO M SOFTENING LENS

☐

Cutout dimension (mm): 32,5

15710 1140 COMPO M GLASS SBL

☐

Cutout dimension (mm): 32,5

Notes: