



COMPO S TW 96520

9 15713 9020 B


AVAILABLE IN

BLACK 9 15713 9020 B

CHROMED 9 15713 9020 C

DARK CHROMED 9 15713 9020 DC

WHITE 9 15713 9020 W

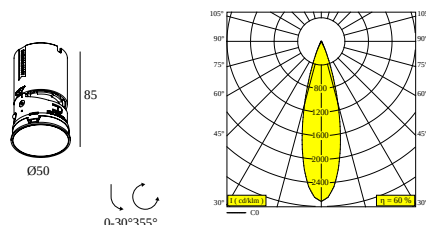

 [View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Ceiling Recessed
CUTOUT SHAPE/SIZE (MM)	round - 90
RECESSED DEPTH (MM)	85
THICKNESS OF MOUNTING SURFACE (MM)	max.25
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.128
ADJUSTABILITY	0° to 30° swiveling, 355° rotatable

Electrical info	
CLASS	III
DIM TYPE	depending on power supply
ENERGY CLASS	G

Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 5,4W / CRI>90 / 2700K-6500K / 522lm
TM-30 VALUES	rf: 89 / Rg: 100
SDCM	SDCM2
RISKGROUP	RG1
LM80	L90B10 > 56000
BEAMANGLE	20°
LED TECHNICS (LIGHT SOURCE)	522lm // 5,4W // 97lm/W
LED TECHNICS (LUMINAIRE)	313lm // 6,2W // 50lm/W

Requirements

LED POWER SUPPLY 150 mA - DC

Accessories

COMPO S HONEYCOMB SINGLE USE B

COMPO S LINEAR SPREAD LENS

COMPO S SPREAD LENS

COMPO S SOFTENING LENS

COMPO S GLASS SBL

For detailed installation instructions, please consult the manual : [9_15713_XXX0_HAND.pdf](#)

CEILING COMPATIBILITY


Ceiling Type	Mounting Kit	
	 15710 0010 - MOUNTING KIT COMPO S TRIM	Required
	 15710 0040 - MOUNTING KIT COMPO S TRIMLESS	Required
	 15710 0010 - MOUNTING KIT COMPO S TRIM	Required
	 15710 0040 - MOUNTING KIT COMPO S TRIMLESS	Required
	 15710 0010 - MOUNTING KIT COMPO S TRIM	Required
	 15710 0040 - MOUNTING KIT COMPO S TRIMLESS	Required

FINISH YOUR SPECIFICATION

LED Power supply	# of Fixtures
 # of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the ' ' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.	Min current Max current

15710 5700	LED POWER SUPPLY MULTIPOWER 12W DALI DT8 150mA	1	
------------	--	---	----------------------

Mounting kits			
	15710 0010 B	MOUNTING KIT COMPO S TRIM B	
	Cutout dimension (mm): 55		
	15710 0010 W	MOUNTING KIT COMPO S TRIM W	
	Cutout dimension (mm): 55		
	15710 0040	MOUNTING KIT COMPO S TRIMLESS	
	Cutout dimension (mm): 55		

Light altering devices			
	15710 0100 B	COMPO S HONEYCOMB SINGLE USE B	
	15710 0110	COMPO S LINEAR SPREAD LENS	

DELTALIGHT

COMPO S TW 96520

9 15713 9020 B

Cutout dimension (mm): 26,5

15710 0120 COMPO S SPREAD LENS



Cutout dimension (mm): 26,5

15710 0130 COMPO S SOFTENING LENS



Cutout dimension (mm): 26,5

15710 0140 COMPO S GLASS SBL



Cutout dimension (mm): 26,5

Notes: