




MULTINOVA 55 TW PRISM 930
ADM DIM5

28034 9005 B

AVAILABLE IN
BLACK 28034 9005 B
WHITE 28034 9005 W

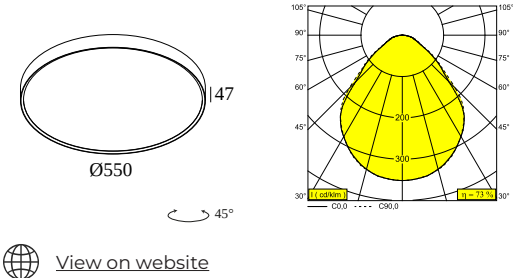

[View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Mains voltage track Mains voltage track mounted
INGRESS PROTECTION	IP20
WEIGHT (KG)	4.6
ADJUSTABILITY	non adjustable
INFORMATION	INCL.PC PRISMATIC 3F MULTI DIMMABLE POWER ADAPTER - (DALI DT8)
Electrical info	
ELECTRICAL	220-240V / 50-60Hz
CLASS	II
POWER SUPPLY	YES
DIM TYPE	DALI
ENERGY CLASS	D
CERTIFICATES	CB, ENEC, LCA, RCM
Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	@ 2700K: LED cluster 19,6W / CRI>90 (R9: 63) / 2700K-6500K / 2885lm Or @ 6500K: 2 x (LED cluster 19,7W / CRI>90 (R9: 81) / 2700K-6500K / 3075lm)
SDCM	SDCM3
RISKGROUP	RG0
LM80	L70 > 60000
LED TECHNICS (LIGHT SOURCE)	@ 2700K: 2885lm // 19,6W // 147lm/W Or @ 6500K: 6150lm // 39,4W // 156lm/W
LED TECHNICS (LUMINAIRE)	@ 2700K: 2098lm // 22,5W // 93lm/W Or @ 6500K: 4472lm // 45,3W // 99lm/W
Requirements	
TRACK 3F DIM	

For detailed installation instructions, please consult the manual : [28034_XXX5_HAND.pdf](#)

DELTALIGHT

MULTINOVA 55 TW PRISM 930 ADM DIM5

28034 9005 B

COMPATIBLE TRACKS

TRACK 3F DIM H			Available Colours
200 14 410	TRACK 3F DIM H 1m	1000 m 1.6 kg	 
200 14 420	TRACK 3F DIM H 2m	2000 m 3.2 kg	 
200 14 430	TRACK 3F DIM H 3m	3000 m 4.8 kg	 
TRACK 3F DIM IN			Available Colours
200 13 410	TRACK 3F DIM IN 1m	1000 m 1.2 kg	 
200 13 420	TRACK 3F DIM IN 2m	2000 m 2.4 kg	 
200 13 430	TRACK 3F DIM IN 3m	3000 m 3.5 kg	 
TRACK 3F DIM ON			Available Colours
200 12 410	TRACK 3F DIM ON 1m	1000 m 1.1 kg	  
200 12 420	TRACK 3F DIM ON 2m	2000 m 2.1 kg	  
200 12 430	TRACK 3F DIM ON 3m	3000 m 3.1 kg	  

Notes: