




SPYCO 90 93024 ADM DIM5

19921 9325 B

AVAILABLE IN
BLACK 19921 9325 B
FULL WHITE 19921 9325 FW

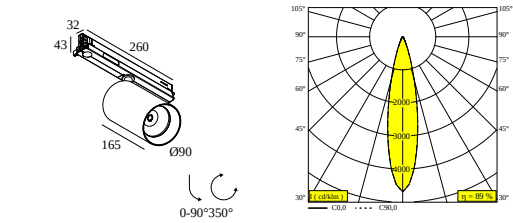

 [View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Mains voltage track Mains voltage track mounted
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.8
ADJUSTABILITY	0° to 90° swiveling, 350° rotatable
INFORMATION	INCL.DIMMABLE LED POWER SUPPLY 800/900mA- DC Max. 800mA with HONEYCOMB
Electrical info	
ELECTRICAL	220-240V / 50-60Hz
CLASS	II
POWER SUPPLY	YES
DIM TYPE	DALI
ENERGY CLASS	F
CERTIFICATES	EPD, RCM
Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	@ 900mA: LED array 33,2W / CRI>90 (R9: 52) / 3000K / 3465lm Or @ 800mA (+HONEYCOMB): LED array 29,1W / CRI>90 (R9: 52) / 3000K / 3144lm
MIN. DISTANCE TO LIGHTSOURCE (M)	1
TM-30 VALUES	@ 900mA: rf: 90 / Rg: 99 @ 800mA (+HONEYCOMB): rf: 90 / Rg: 99
SDCM	SDCM1
RISKGROUP	RG1
LM80	L90B10 > 50000
BEAMANGLE	24°
LED TECHNICS (LIGHT SOURCE)	@ 900mA: 3465lm // 33,2W // 104lm/W Or @ 800mA (+HONEYCOMB): 3144lm // 29,1W // 108lm/W
LED TECHNICS (LUMINAIRE)	@ 900mA: 3099lm // 38,2W // 81lm/W Or @ 800mA (+HONEYCOMB): 2075lm // 33,5W // 62lm/W
Requirements	
TRACK 3F ON	
Accessories	
SPYCO 90 HONEYCOMB	

For detailed installation instructions, please consult the manual : [19921_XXX5_HAND.pdf](#)

FINISH YOUR SPECIFICATION

Light altering devices



19922 0020 B SPYCO 90 HONEYCOMB B



COMPATIBLE TRACKS

TRACK 3F DIM ON			Available Colours	
200 12 410	TRACK 3F DIM ON 1m	1000 m 1.1 kg	  	
200 12 420	TRACK 3F DIM ON 2m	2000 m 2.1 kg	  	
200 12 430	TRACK 3F DIM ON 3m	3000 m 3.1 kg	  	

Notes: