




M26L - HALOSCAN HP SOFT 93014
DIM5

23132 9015 W

AVAILABLE IN
BLACK 23132 9015 B
WHITE 23132 9015 W

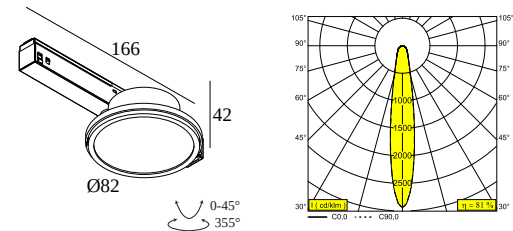

 [View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Low voltage systems Low voltage system mounted
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.3
ADJUSTABILITY	0° to 45° swiveling, 355° rotatable
INFORMATION	LENS SP-14° EXCL.LED POWER SUPPLY 48V-DC

Electrical info	
ELECTRICAL	48V-DC
CLASS	III
DIM TYPE	DALI
ENERGY CLASS	E
CERTIFICATES	CB, ENEC

Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 11,8W / CRI>90 (R9: 50) / 3000K-1800K / 1307lm
TM-30 VALUES	Rf: 90 / Rg: 99
SDCM	SDCM2
RISKGROUP	RG1
LM80	L90B10 > 50000
BEAMANGLE	14°
LED TECHNICS (LIGHT SOURCE)	1307lm // 11,8W // 110lm/W
LED TECHNICS (LUMINAIRE)	1062lm // 13,6W // 78lm/W

Remarks
Take a look at our MAGNETIC PROFILES movie

Requirements
LED POWER SUPPLY 48V-DC







Accessories
HALOSCAN HONEYCOMB
HALOSCAN LINEAR SPREAD LENS

M26L - HALOSCAN HP SOFT 93014 DIM5

23132 9015 W

For detailed installation instructions, please consult the manual : [23132_XXX5_HAND.pdf](#)

FINISH YOUR SPECIFICATION


LED power supplies		# of Fixtures		
		Min current Max current		
 55 100 90 300 89 48 100 LED POWER SUPPLY 48V-DC / 100W DIN Dimtype: non-dimmable			7	
 63 114 125 300 89 48 240 LED POWER SUPPLY 48V-DC / 240W DIN Dimtype: non-dimmable			17	
 17 298 30 21012 0230 LED POWER SUPPLY 48V-DC / 100W Dimtype: non-dimmable Cutout dimension (mm): 40			7	
 22 392 30 21012 0240 LED POWER SUPPLY 48V-DC / 200W Dimtype: non-dimmable Cutout dimension (mm): 40			14	
Light altering devices				
 2 Ø72 23110 0040 HALOSCAN LINEAR SPREAD LENS				
 2 Ø72 23110 0050 B HALOSCAN HONEYCOMB B				

M26L - HALOSCAN HP SOFT 93014 DIM5


23132 9015 W

COMPATIBLE COMPOSABLES


SHIFTLINE M26L profile (+ SHIFTLINE M26L MATRIX) Available Colours




23358 0000 SLM26L - PROFILE



23358 0010 SLM26L - PROFILE 1m




23358 0020 SLM26L - PROFILE 2m




23358 0030 SLM26L - PROFILE 3m




SHIFTLINE M35R profile Available Colours




23375 0000 SLM35R - PROFILE



23375 0010 SLM35R - PROFILE 1m



23375 0020 SLM35R - PROFILE 2m



23375 0030 SLM35R - PROFILE 3m



Notes:

DELTALIGHT

M26L - HALOSCAN HP SOFT 93014 DIM5

23132 9015 W