


INFORM R1+ CS DOWN-UP 93048  
DIM5

REFERENCE 26816 9325 B-B

AVAILABLE IN  
**BLACK-BLACK** 26816 9325 B-B  
**BLACK-FLEMISH GOLD** 26816 9325 B-FG  
**FLEMISH GOLD-BLACK** 26816 9325 FG-B  
**WHITE-BLACK** 26816 9325 W-B  
**WHITE-WHITE** 26816 9325 W-W

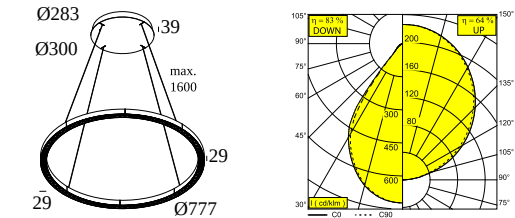

[View on website](#)



| General info                |                                                                                                                                                                                  |
|-----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| LOCATION                    | indoor                                                                                                                                                                           |
| INSTALLATION                | Ceiling Suspended                                                                                                                                                                |
| INGRESS PROTECTION          | IP20                                                                                                                                                                             |
| WEIGHT (KG)                 | 4.5                                                                                                                                                                              |
| ADJUSTABILITY               | non adjustable                                                                                                                                                                   |
| INFORMATION                 | 96 x REFLECTOR WFL-71° (DOWN)<br>INCL.DIMMABLE LED POWER SUPPLY 700mA-DC<br>2 DALI CONTROL CHANNELS<br>INCL.4 x CABLE SUSPENSION SINGLE AUTO. 1,6m<br>POWER VIA CABLE SUSPENSION |
| Electrical info             |                                                                                                                                                                                  |
| ELECTRICAL                  | 220-240V / 50-60Hz                                                                                                                                                               |
| CLASS                       | I                                                                                                                                                                                |
| POWER SUPPLY                | YES                                                                                                                                                                              |
| DIM TYPE                    | DALI                                                                                                                                                                             |
| ENERGY CLASS                | C                                                                                                                                                                                |
| CERTIFICATES                | CB, ENEC, RCM                                                                                                                                                                    |
| Lightsource info            |                                                                                                                                                                                  |
| LIGHTSOURCE NAME            | LED                                                                                                                                                                              |
| LIGHTSOURCE                 | DOWN: LED cluster 22,9W / CRI>90 (R9: 50) / 3000K / 3504lm<br>UP: LED cluster 11,5W / CRI>90 (R9: 50) / 3000K / 1752lm                                                           |
| SDCM                        | SDCM3                                                                                                                                                                            |
| LM80                        | L80 > 60000                                                                                                                                                                      |
| BEAMANGLE                   | 71°                                                                                                                                                                              |
| LED TECHNICS (LIGHT SOURCE) | DOWN: 3504lm // 22,9W // 153lm/W<br>UP: 1752lm // 11,5W // 153lm/W                                                                                                               |
| LED TECHNICS (LUMINAIRE)    | DOWN: 2800lm // 26,3W // 106lm/W<br>UP: 1121lm // 13,2W // 85lm/W                                                                                                                |

For detailed installation instructions, please consult the manual : [26816\\_XXX5\\_HAND.pdf](#)

# DELTALIGHT

## INFORM R1+ CS DOWN-UP 93048 DIM5

26816 9325 B-B

Notes: