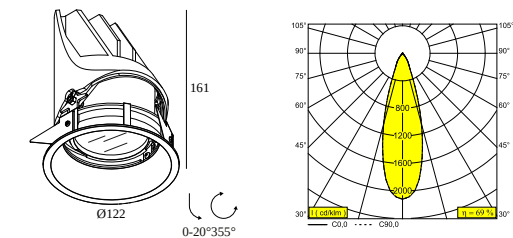




ENTERO RD-L X TW 96530

28449 9020 B

AVAILABLE IN
BLACK 28449 9020 B
FLEMISH BRONZE OUTDOOR 28449 9020 FBRX
FULL WHITE 28449 9020 FW
ANTHRACITE 28449 9020 N



[View on website](#)



General info	
LOCATION	outdoor
INSTALLATION	Ceiling Recessed
CUTOUT SHAPE/SIZE (MM)	round - 112
RECESSED DEPTH (MM)	175
THICKNESS OF MOUNTING SURFACE (MM)	max.16
INGRESS PROTECTION	IP65
PROTECTION AGAINST MECHANICAL IMPACT	IK06
WEIGHT (KG)	0.76
ADJUSTABILITY	0° to 20° swiveling, 355° rotatable
INFORMATION	REFLECTOR FL-30° EXCL.LED POWER SUPPLY 500mA-DC TW - (DALI DT8)

Electrical info	
CLASS	III
DIM TYPE	depending on power supply
ENERGY CLASS	E
CERTIFICATES	CB, ENEC, EPD

Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 17,8W / CRI>90 (R9: 50) / 2700K-6500K / 2054lm
TM-30 VALUES	rf: 89 / Rg: 100
SDCM	SDCM2
RISKGROUP	RG1
LM80	L90B10 > 50000
BEAMANGLE	30°
LED TECHNICS (LIGHT SOURCE)	2054lm // 17,8W // 116lm/W
LED TECHNICS (LUMINAIRE)	1417lm // 20,5W // 69lm/W

Requirements
LED POWER SUPPLY 500mA-DC TW

Options
ENTERO RD-L MOUNTING SET S2

Accessories
ENTERO L HONEYCOMB
ENTERO L LINEAR SPREAD LENS
ENTERO L SPREAD LENS
ENTERO L SOFTENING LENS

DELTALIGHT

ENTERO RD-L X TW 96530

28449 9020 B

ENTERO L GLASS SBL

For detailed installation instructions, please consult the manual : [28449_XXX0_HAND.pdf](#)

CEILING COMPATIBILITY

Ceiling Type	Mounting Kit
 System ceiling	-
 Plasterboard	-
 Stucanet	-
 Wood	-
 Concrete	 28500 0210 - ENTERO RD-L MOUNTING SET S2 Required
 Concrete + plaster	 28500 0210 - ENTERO RD-L MOUNTING SET S2 Required
 Lintel + plaster	 28500 0210 - ENTERO RD-L MOUNTING SET S2 Required
 Hollow-core slab	 28500 0210 - ENTERO RD-L MOUNTING SET S2 Required
 Hollow-core slab + plaster	 28500 0210 - ENTERO RD-L MOUNTING SET S2 Required
 Stretched ceiling	-

FINISH YOUR SPECIFICATION

LED power supplies	# of Fixtures
 # of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the ' ' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.	Min current Max current

DELTALIGHT

ENTERO RD-L X TW 96530

28449 9020 B



21012 0355 LED POWER SUPPLY 500mA-DC 2CH TW DIM5

Dimtype: DALI

Cutout dimension (mm): 85


1

☐


Light altering devices




28500 0130 ENTERO L LINEAR SPREAD LENS

☐


28500 0140 ENTERO L SPREAD LENS

☐

28500 0150 ENTERO L SOFTENING LENS

☐


28500 0160 ENTERO L GLASS SBL

☐

28500 0170 B ENTERO L HONEYCOMB SINGLE USE B

☐

Mounting set S2



28500 0210 ENTERO RD-L MOUNTING SET S2

☐

Notes:

DELTALIGHT

ENTERO RD-L X TW 96530

28449 9020 B