




M26L - TWEETER BL 930 DIM5

23243 9305 W

AVAILABLE IN
BLACK 23243 9305 B
WHITE 23243 9305 W

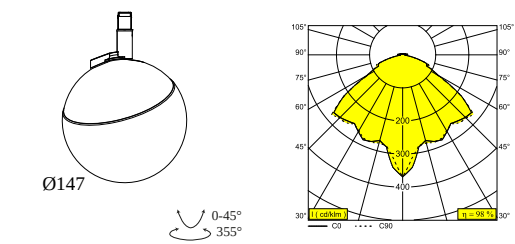

 [View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Low voltage systems Low voltage system mounted
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.4
ADJUSTABILITY	0° to 45° swiveling, 355° rotatable
INFORMATION	EXCL.LED POWER SUPPLY 48V-DC

Electrical info	
ELECTRICAL	48V-DC
CLASS	III
DIM TYPE	DALI
ENERGY CLASS	E
CERTIFICATES	CB, EAC, ENEC

Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 8,6W / CRI>90 (R9: 52) / 3000K / 1089lm
TM-30 VALUES	rf: 90 / Rg: 99
SDCM	SDCM1
RISKGROUP	RG1
LM80	L90B10 > 50000
LED TECHNICS (LIGHT SOURCE)	1089lm // 8,6W // 127lm/W
LED TECHNICS (LUMINAIRE)	1067lm // 9,9W // 108lm/W

Remarks
Take a look at our MAGNETIC PROFILES movie

Requirements
BOWL GLASS CLEAR
BOWL GLASS AMBER
BOWL GLASS OPAL WHITE
LED POWER SUPPLY 48V-DC

For detailed installation instructions, please consult the manual : [23243_XXXX_HAND.pdf](#)

M26L - TWEETER BL 930 DIM5

23243 9305 W

FINISH YOUR SPECIFICATION


LED power supplies

of Fixtures



of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current




300 89 48 90 LED POWER SUPPLY 48V-DC / 90W

7

Dimtype: non-dimmable


Cutout dimension (mm): 75



300 89 48 100 LED POWER SUPPLY 48V-DC / 100W DIN

8


Dimtype: non-dimmable



300 89 48 150 LED POWER SUPPLY 48V-DC / 150W

12


Dimtype: non-dimmable



300 89 48 240 LED POWER SUPPLY 48V-DC / 240W DIN

19

Dimtype: non-dimmable




21012 0230 LED POWER SUPPLY 48V-DC / 100W

8

Dimtype: non-dimmable

Cutout dimension (mm): 40



21012 0240 LED POWER SUPPLY 48V-DC / 200W

16

Dimtype: non-dimmable

Cutout dimension (mm): 40

Power box

of Fixtures





of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current




DELTALIGHT

M26L - TWEETER BL 930 DIM5



23243 9305 W

	23377 0010 B SLM26L - POWERBOX 48V-DC / 96W B	8	☐
Dimtype: non-dimmable			
23377 0010 W SLM26L - POWERBOX 48V-DC / 96W W		8	☐
	23377 0020 B SLM26L - MID POWERBOX 48V-DC / 96W B	8	☐
Dimtype: non-dimmable			
23377 0020 W SLM26L - MID POWERBOX 48V-DC / 96W W		8	☐

To be used with ...

	286 67 01 BOWL GLASS CLEAR	☐
	286 67 02 BOWL GLASS AMBER	☐
	286 67 03 BOWL GLASS OPAL WHITE	☐


COMPATIBLE COMPOSABLES

SHIFTLINE M26L profile (+ SHIFTLINE M26L MATRIX)	Available Colours
	23358 0000 SLM26L - PROFILE 
	23358 0010 SLM26L - PROFILE 1m 


DELTALIGHT

M26L - TWEETER BL 930 DIM5

23243 9305 W



23358 0020 SLM26L - PROFILE 2m




23358 0030 SLM26L - PROFILE 3m




SHIFTLINE M35R profile


Available Colours




23375 0000 SLM35R - PROFILE



23375 0010 SLM35R - PROFILE 1m



23375 0020 SLM35R - PROFILE 2m



23375 0030 SLM35R - PROFILE 3m



Notes: